


Packaging Diagrams and Parameters

48-Lead Very-Thin Quad Flatpack No-Lead Package (8VW) - 7x7x1.0 mm Body [VQFN] With 5.6x5.6 mm Exposed Pad and Dimpled Wettable Flanks


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

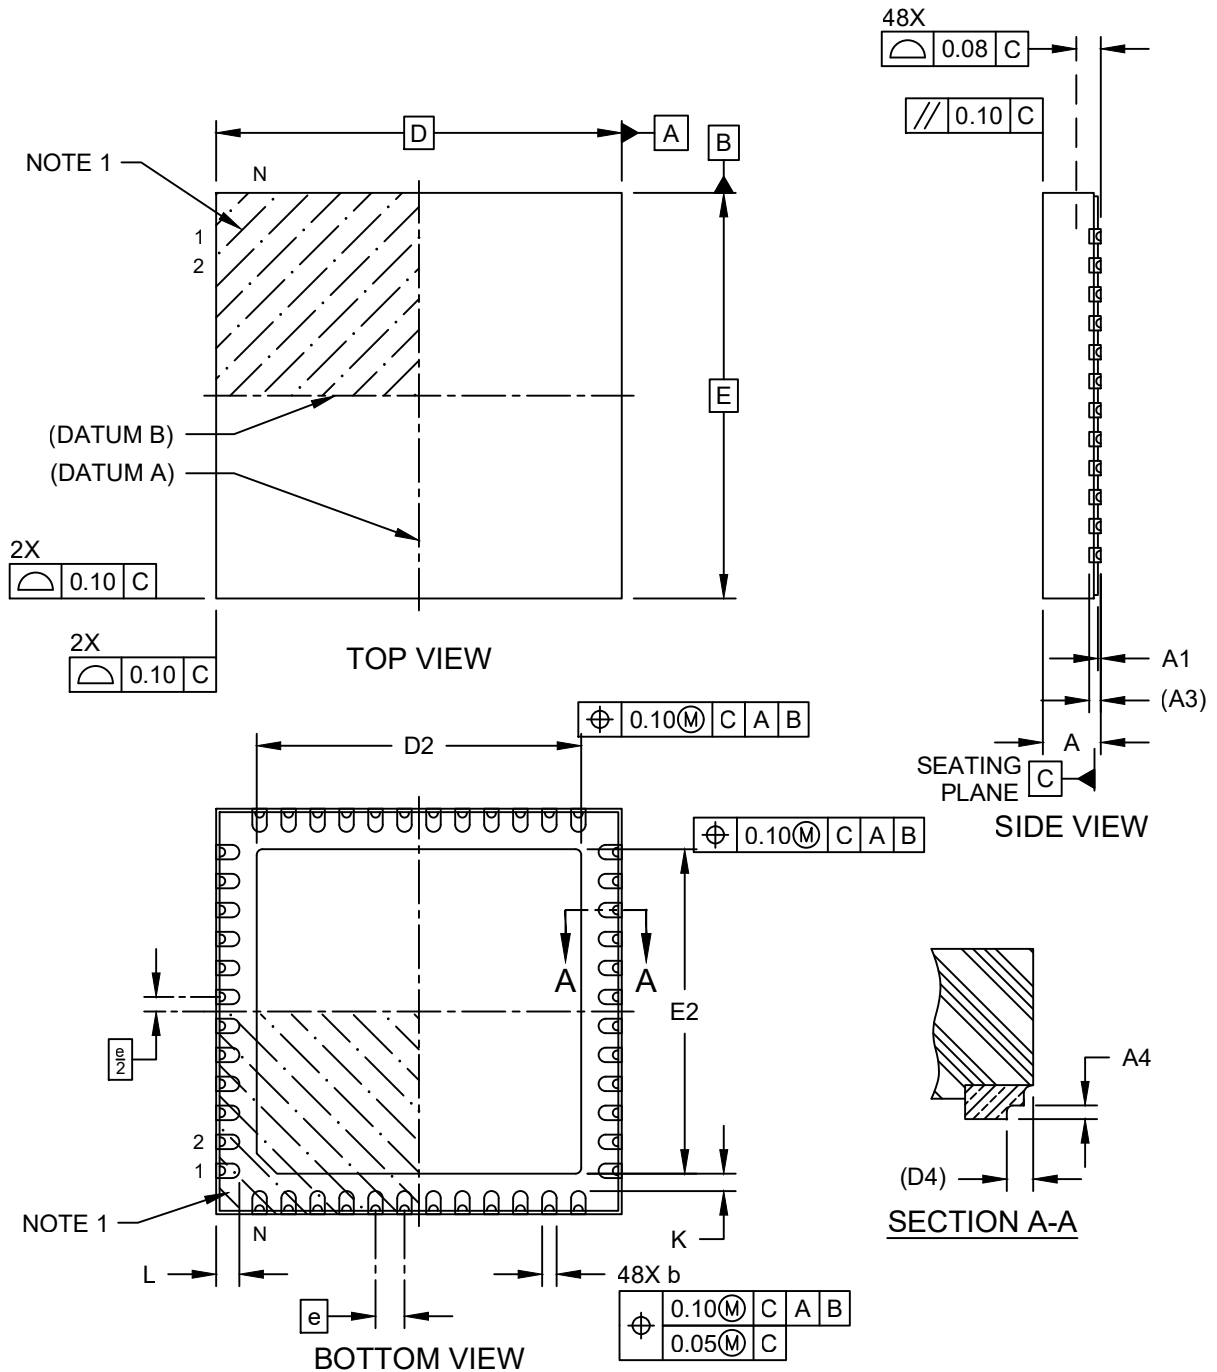

Packaging Diagrams and Parameters

48-Lead Very-Thin Quad Flatpack No-Lead Package (8VW) - 7x7x1.0 mm Body [VQFN] With 5.6x5.6 mm Exposed Pad and Dimpled Wetable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

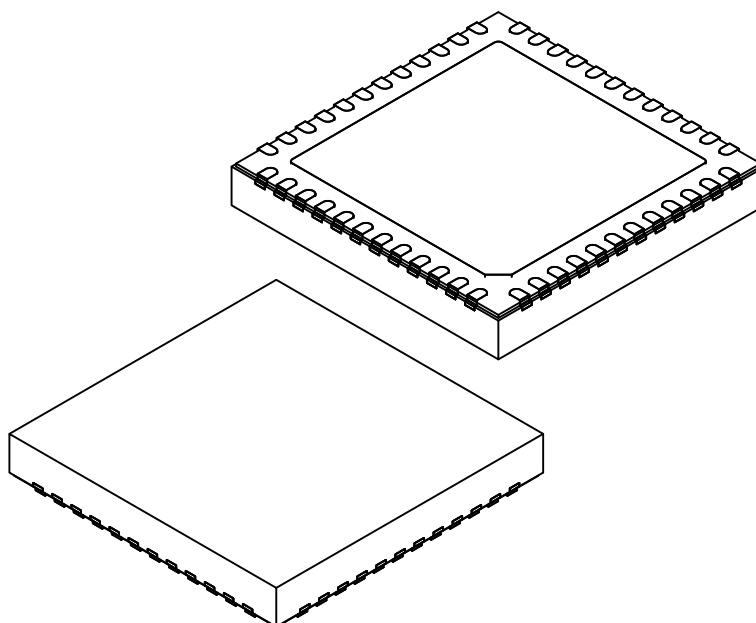

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		48		
Pitch	e		0.50 BSC		
Overall Height	A		0.80	0.90	1.00
Standoff	A1		0.00	0.035	0.05
Terminal Thickness	A3		0.203 REF		
Overall Length	D		7.00 BSC		
Exposed Pad Length	D2		5.50	5.60	5.70
Overall Width	E		7.00 BSC		
Exposed Pad Width	E2		5.50	5.60	5.70
Terminal Width	b		0.20	0.25	0.30
Terminal Length	L		0.35	0.40	0.45
Terminal-to-Exposed-Pad	K		0.20	-	-
Dimple Length	D4		0.155 REF		
Dimple Height	A4		0.05	0.08	0.11


Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Land Pattern

48-Lead Very-Thin Quad Flatpack No-Lead Package (8VW) - 7x7x1.0 mm Body [VQFN] With 5.6x5.6 mm Exposed Pad and Dimpled Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

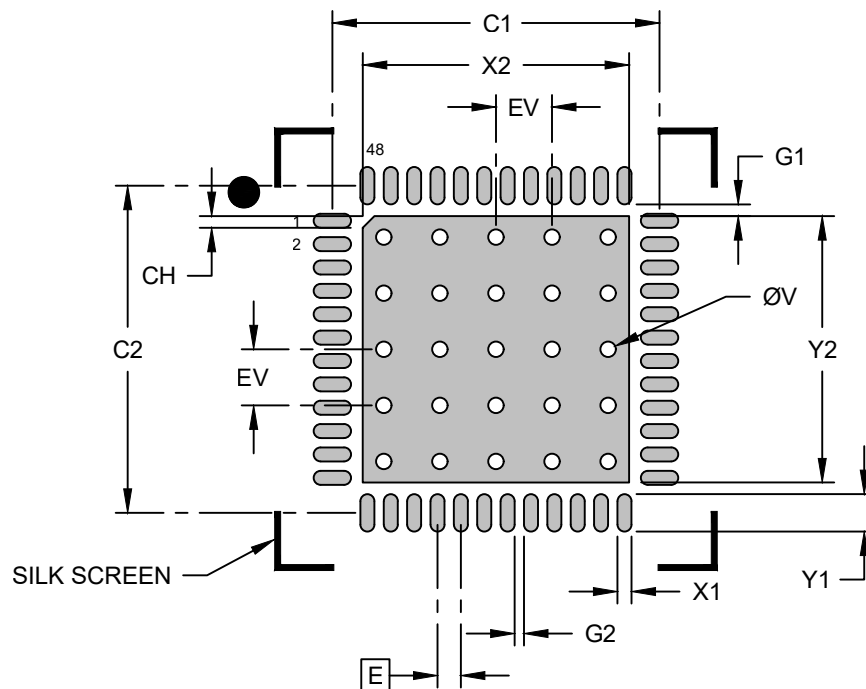

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Optional Center Pad Width	X2			5.70
Optional Center Pad Length	Y2			5.70
Center Pad Corner Chamfer	CH		0.25	
Contact Pad Spacing	C1		7.00	
Contact Pad Spacing	C2		7.00	
Contact Pad Width (X48)	X1			0.30
Contact Pad Length (X48)	Y1			0.80
Contact Pad to Center Pad (X48)	G1	0.25		
Contact Pad to Contact Pad (X44)	G2	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during the reflow process.