


Packaging Diagrams and Parameters

39-Lead Very-Thin Quad Flatpack No-Leads (8YW) 6x7x1mm [VQFN] with Multiple Exposed Pads and Stepped Wettable Flanks



Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

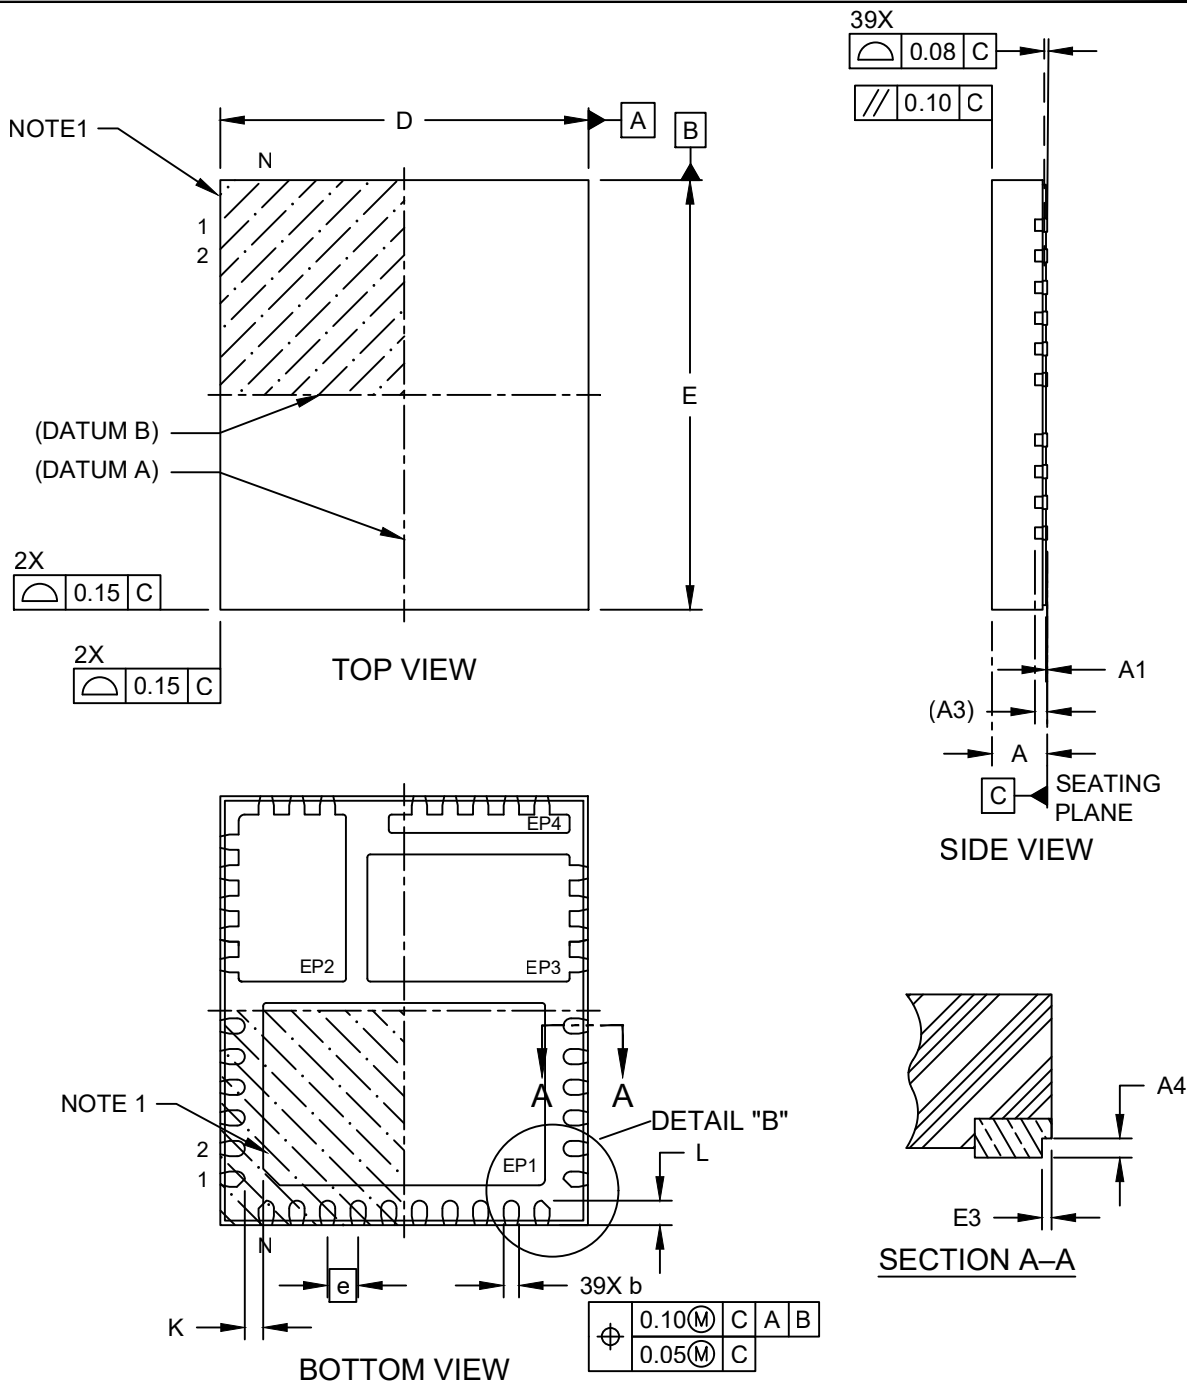

Packaging Diagrams and Parameters

39-Lead Very-Thin Quad Flatpack No-Leads (8YW) 6x7x1mm [VQFN] with Multiple Exposed Pads and Stepped Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

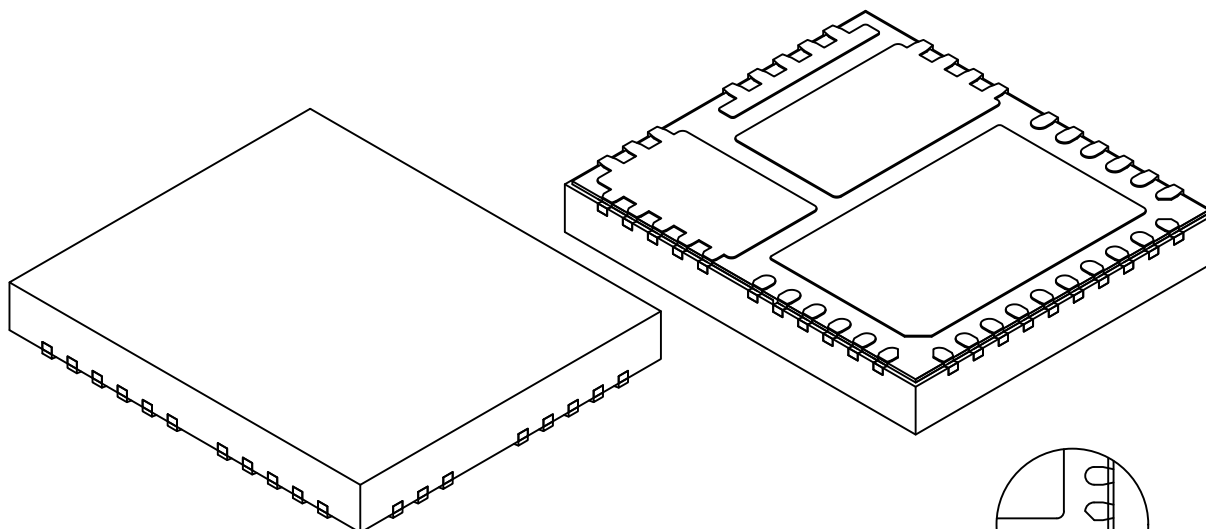

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	39		
Pitch	e	0.50 BSC		
Overall Height	A	0.80	0.90	1.00
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.20 REF		
Overall Length	D	5.90	6.00	6.10
Overall Width	E	6.90	7.00	7.10
Exposed Pad Size	EP1	4.60x2.98mm		
Exposed Pad Size	EP2	1.75x2.73mm		
Exposed Pad Size	EP3	3.30x2.08mm		
Exposed Pad Size	EP4	2.95x0.60mm		
Terminal Width	b	0.18	0.25	0.30
Terminal Length	L	0.30	0.40	0.50
Terminal-to-Exposed-Pad	K	0.30	-	-
Wettable Flank Step Cut Width	E3	0.010	-	0.075
Wettable Flank Step Cut Depth	A4	0.075	-	0.150

DETAIL "B"

Corner leads with Chamfer
for lead numbers 1, 29, 30 & 39


Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Land Pattern

39-Lead Very-Thin Quad Flatpack No-Leads (8YW) 6x7x1mm [VQFN] with Multiple Exposed Pads and Stepped Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

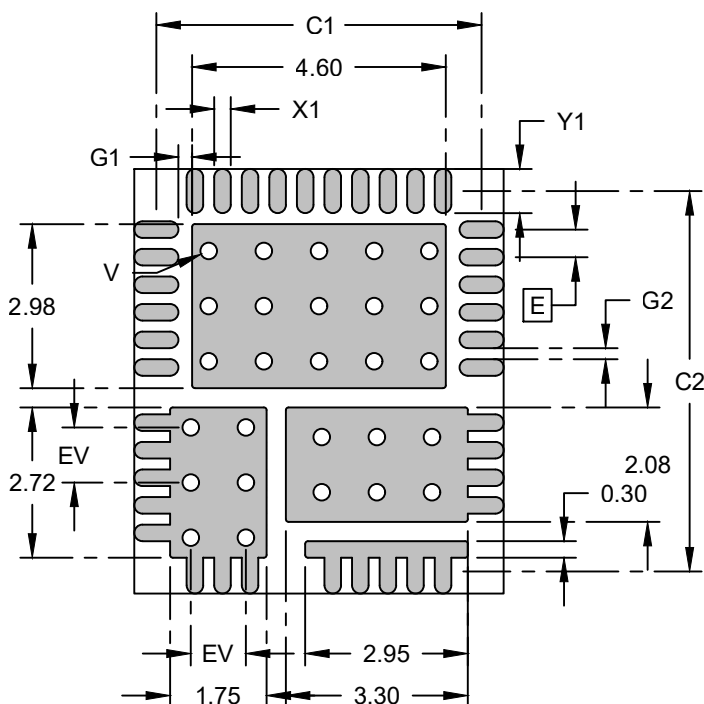

RECOMMENDED LAND PATTERN

Dimension	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E		0.50 BSC	
Contact Pad Spacing	C1		5.90	
Contact Pad Spacing	C2		6.90	
Contact Pad Width (X39)	X1			0.30
Contact Pad Length (X39)	Y1			0.80
Contact Pad to Center Pad (X22)	G1	0.25		
Contact Pad to Contact Pad (X19)	G2	0.20		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, please refer to current industry standard IPC-7093.