


## Packaging Diagrams and Parameters

### 32-Lead Thin Plastic Quad Flat, No-Lead Package (9DW) - 5x5x1.05 mm Body [TQFN] With 3.4x3.4mm Exposed Pad and Stepped Wettable Flanks


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

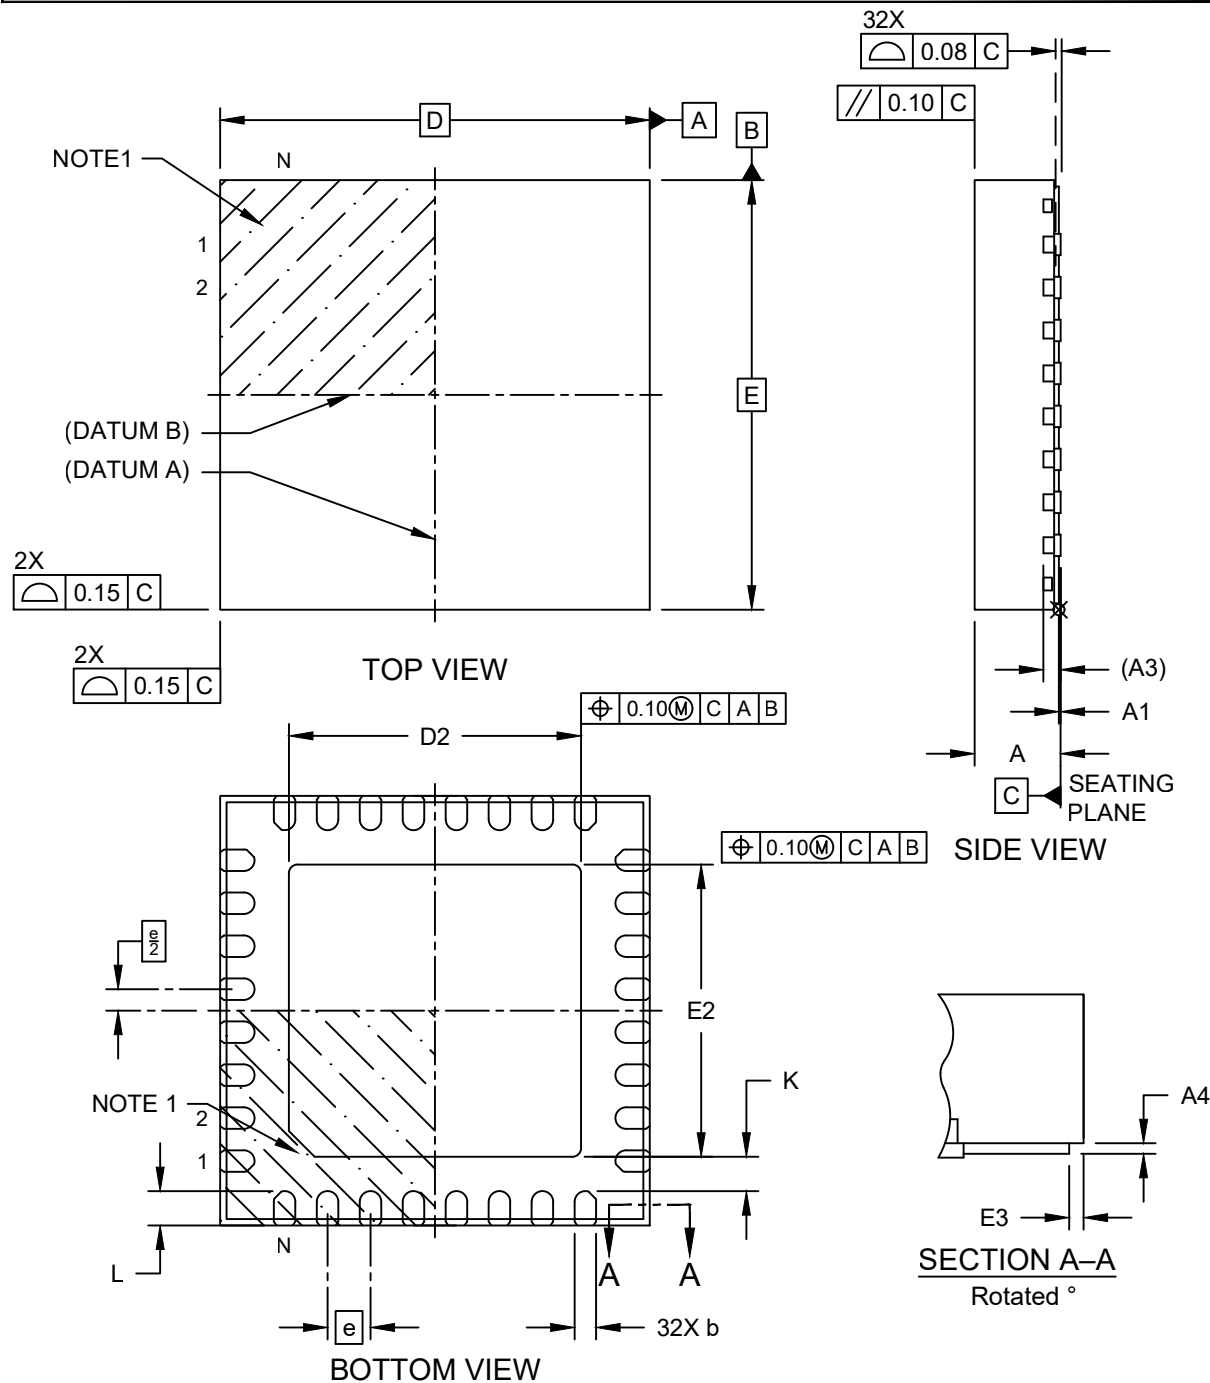

## Packaging Diagrams and Parameters

### 32-Lead Thin Plastic Quad Flat, No-Lead Package (9DW) - 5x5x1.05 mm Body [TQFN] With 3.4x3.4mm Exposed Pad and Stepped Wettable Flanks

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

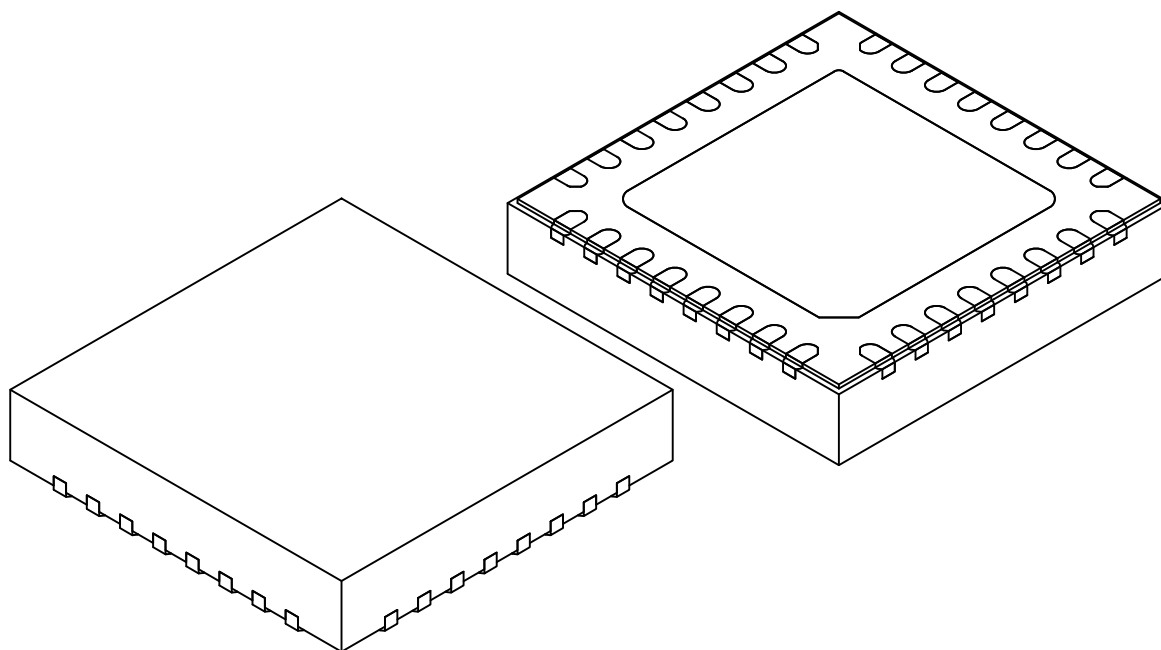

|                               |    | Units | MILLIMETERS |      |       |
|-------------------------------|----|-------|-------------|------|-------|
| Dimension Limits              |    |       | MIN         | NOM  | MAX   |
| Number of Terminals           | N  |       | 32          |      |       |
| Pitch                         | e  |       | 0.50 BSC    |      |       |
| Overall Height                | A  |       | 0.95        | 1.00 | 1.05  |
| Standoff                      | A1 |       | 0.00        | -    | 0.05  |
| Terminal Thickness            | A3 |       | 0.20 REF    |      |       |
| Overall Length                | D  |       | 5.00 BSC    |      |       |
| Exposed Pad Length            | D2 |       | 3.30        | 3.40 | 3.50  |
| Overall Width                 | E  |       | 5.00 BSC    |      |       |
| Exposed Pad Width             | E2 |       | 3.30        | 3.40 | 3.50  |
| Terminal Width                | b  |       | 0.20        | 0.25 | 0.30  |
| Terminal Length               | L  |       | 0.35        | 0.40 | 0.45  |
| Terminal-to-Exposed-Pad       | K  |       | 0.20        | -    | -     |
| Wettable Flank Step Cut Width | E3 |       | 0.010       | -    | 0.075 |
| Wettable Flank Step Cut Depth | A4 |       | 0.075       | -    | 0.150 |


**Notes:**

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. The theoretically exact value is shown without tolerances.  
REF: Reference Dimension, usually without tolerance, is for information purposes only.

## Land Pattern

### 32-Lead Thin Plastic Quad Flat, No-Lead Package (9DW) - 5x5x1.05 mm Body [TQFN] With 3.4x3.4mm Exposed Pad and Stepped Wettable Flanks

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

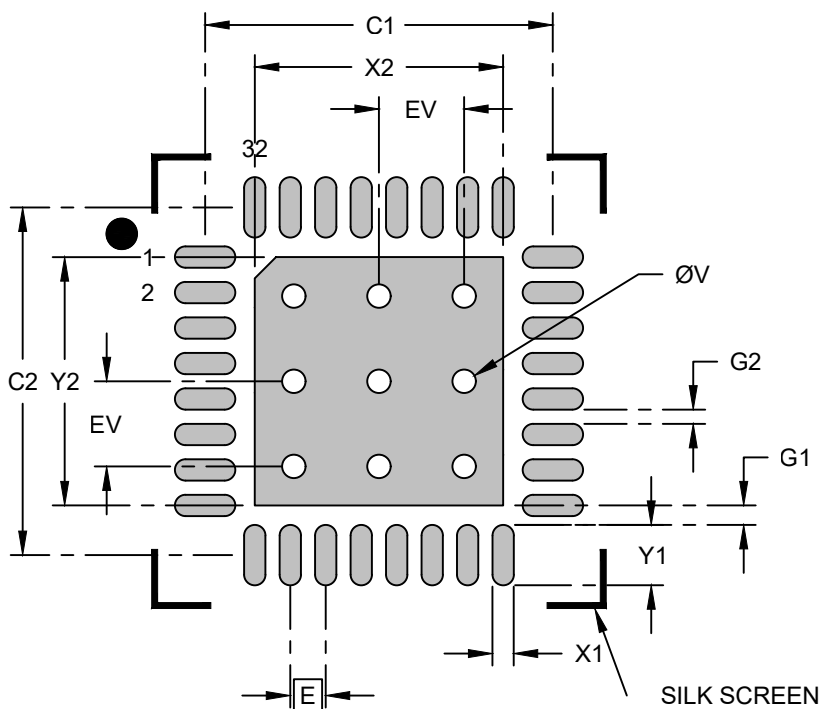

### RECOMMENDED LAND PATTERN

| Dimension Limits                 | Units | MILLIMETERS |      |      |
|----------------------------------|-------|-------------|------|------|
|                                  |       | MIN         | NOM  | MAX  |
| Contact Pitch                    | E     | 0.50 BSC    |      |      |
| Center Pad Width                 | X2    |             |      | 3.50 |
| Center Pad Length                | Y2    |             |      | 3.50 |
| Contact Pad Spacing              | C1    |             | 4.90 |      |
| Contact Pad Spacing              | C2    |             | 4.90 |      |
| Contact Pad Width (X32)          | X1    |             |      | 0.30 |
| Contact Pad Length (X32)         | Y1    |             |      | 0.85 |
| Contact Pad to Center Pad (X32)  | G1    | 0.20        |      |      |
| Contact Pad to Contact Pad (X28) | G2    | 0.20        |      |      |
| Thermal Via Diameter             | V     |             | 0.33 |      |
| Thermal Via Pitch                | EV    |             | 1.20 |      |

**Notes:**

- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
- For best soldering results, please refer to the current industry standard IPC-7093.