


Packaging Diagrams and Parameters

2-Lead Extremely-Thin Single Flatpack No-Leads (9TW) 5x3.5x0.43mm [XSFN]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

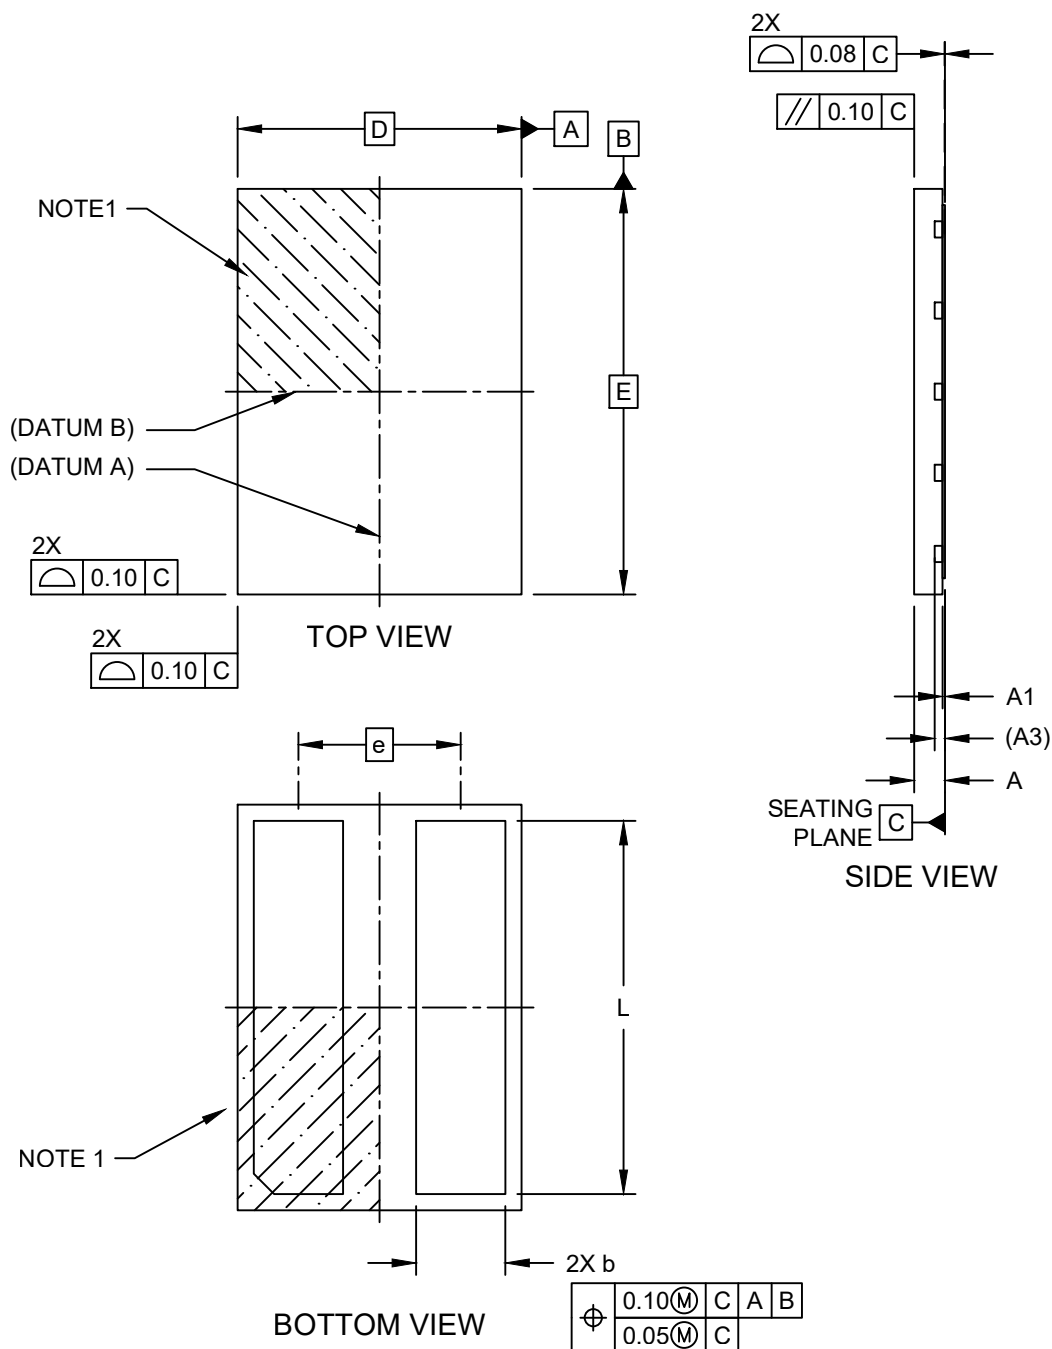

Packaging Diagrams and Parameters

2-Lead Extremely-Thin Single Flatpack No-Leads (9TW) 5x3.5x0.43mm [XSFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

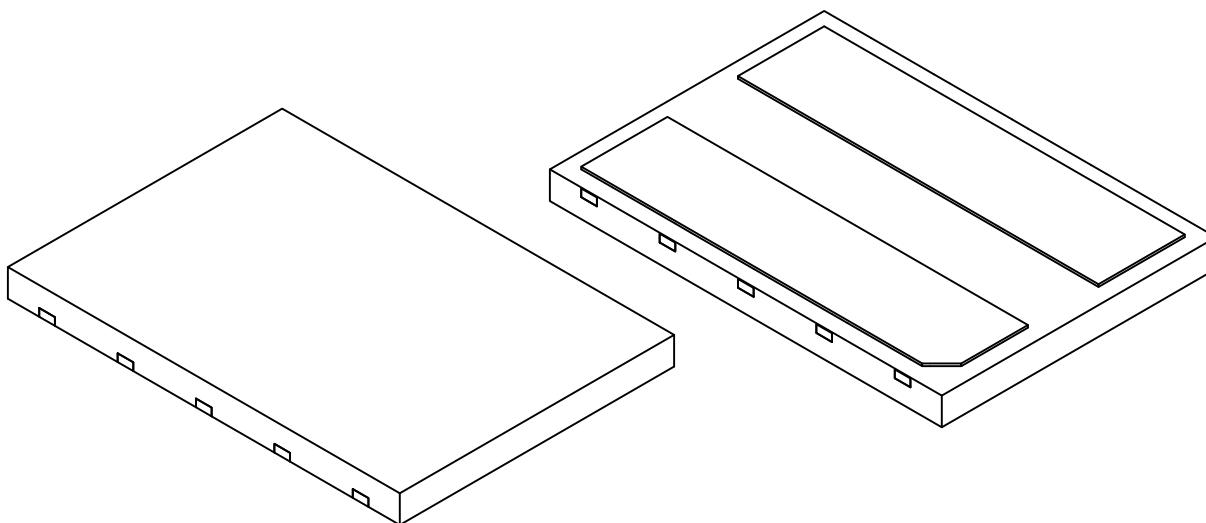

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	2		
Pitch	e	2.00 BSC		
Overall Height	A	0.33	0.38	0.43
Standoff	A1	0.00	-	0.05
Terminal Thickness	A3	0.127 REF		
Overall Length	D	3.50 BSC		
Overall Width	E	5.00 BSC		
Terminal Width	b	1.00	1.10	1.20
Terminal Length	L	4.50	4.60	4.70


Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
REF: Reference Dimension, usually without tolerances, is for information purposes only.

Land Pattern

2-Lead Extremely-Thin Single Flatpack No-Leads (9TW) 5x3.5x0.43mm [XSFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

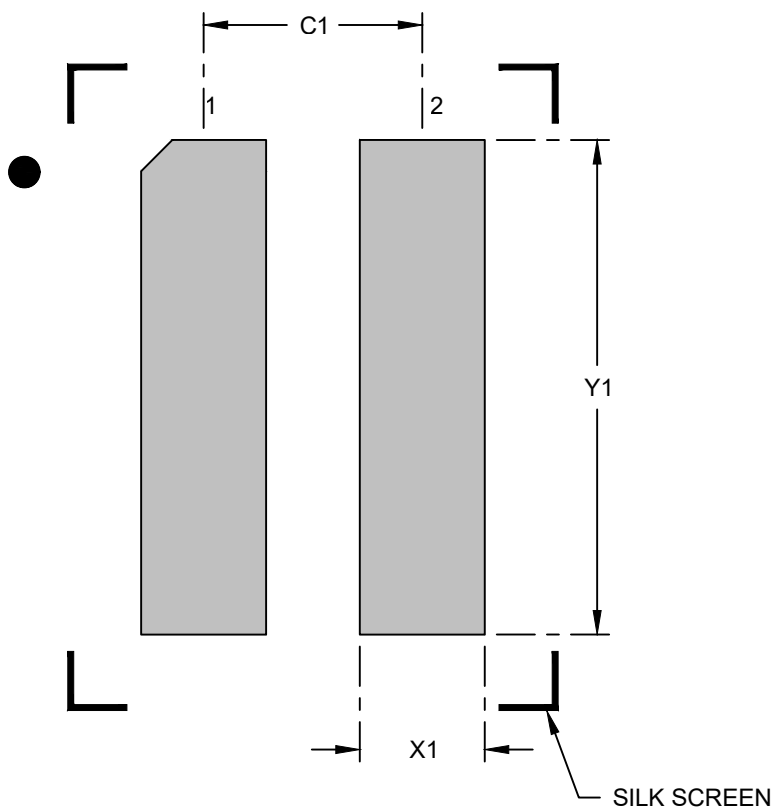

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pad Spacing	C1		2.10	
Contact Pad Width (X2)	X1			1.20
Contact Pad Length (X2)	Y1			4.75

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
- For best soldering results, please refer to the current industry standard IPC-7093.