



**4-Lead Very Thin Plastic Dual Flat, No Lead Package (J5A) - 2.5x2x0.9 mm Body [VDFN]
Micrel Legacy Package CDFN2520-4LD-PL-1**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

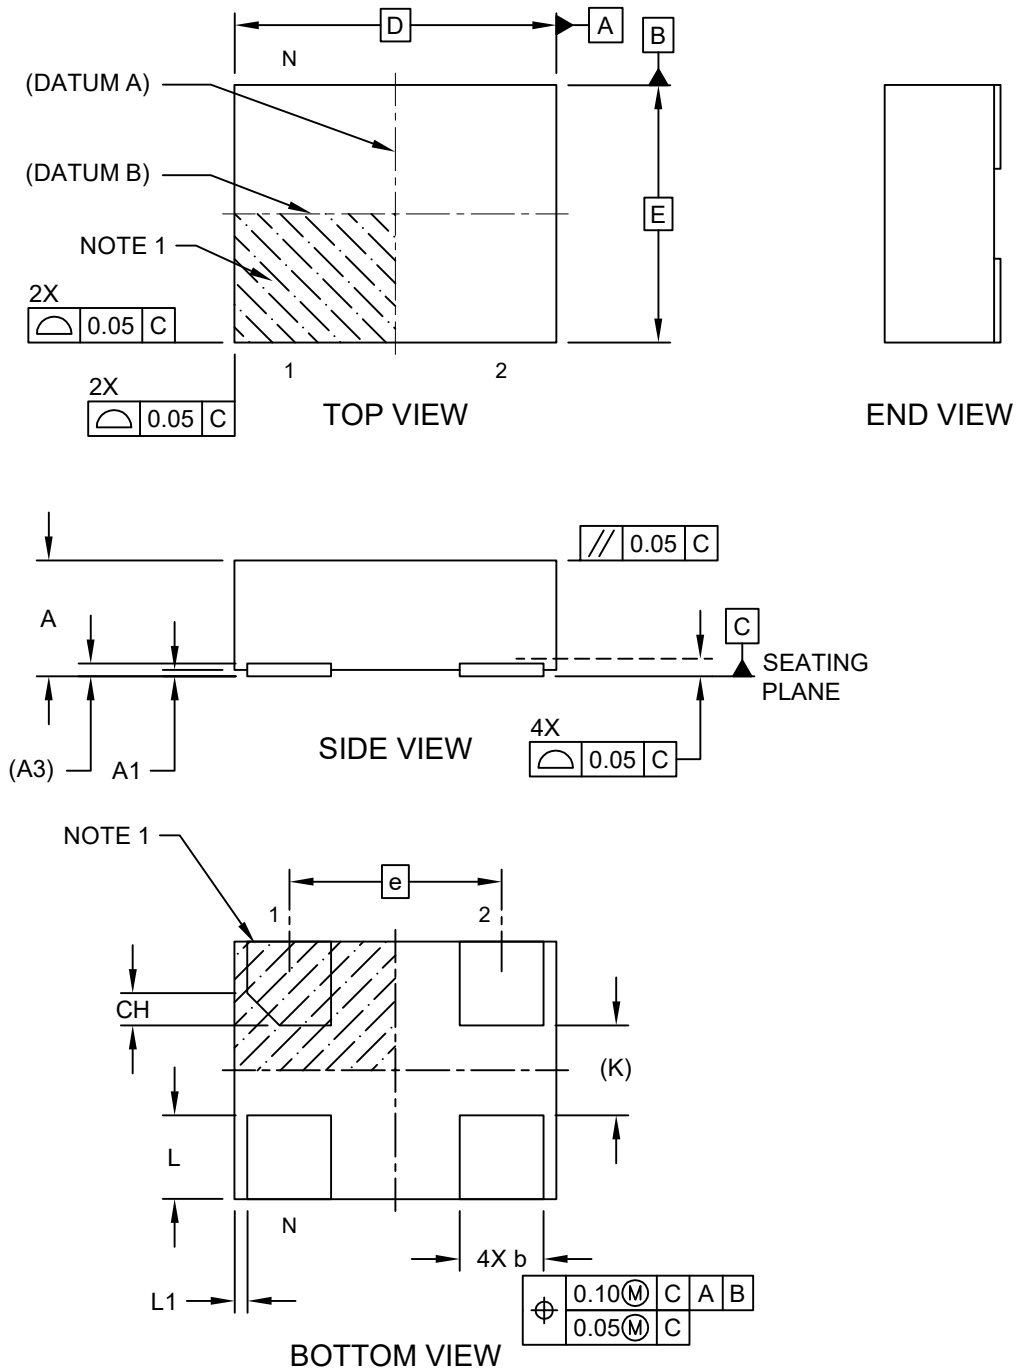

4-Lead Very Thin Plastic Dual Flat, No Lead Package (J5A) - 2.5x2x0.9 mm Body [VDFN] Micrel Legacy Package CDFN2520-4LD-PL-1

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

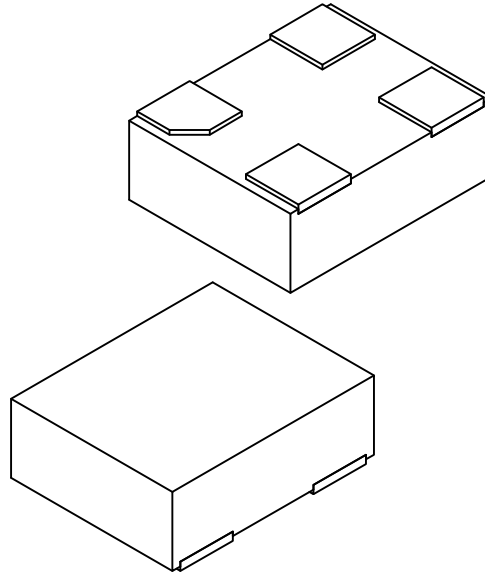


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	4		
Pitch	e	1.65 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.10 REF		
Overall Length	D	2.50 BSC		
Overall Width	E	2.00 BSC		
Terminal Width	b	0.60	0.65	0.70
Terminal Length	L	0.60	0.65	0.70
Terminal to Package Edge	L1	0.05	0.10	0.15
Terminal-to-Terminal	K	0.70 REF		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

4-Lead Very Thin Plastic Dual Flat, No Lead Package (J5A) - 2.5x2x0.9 mm Body [VDFN] Micrel Legacy Package CDFN2520-4LD-PL-1

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

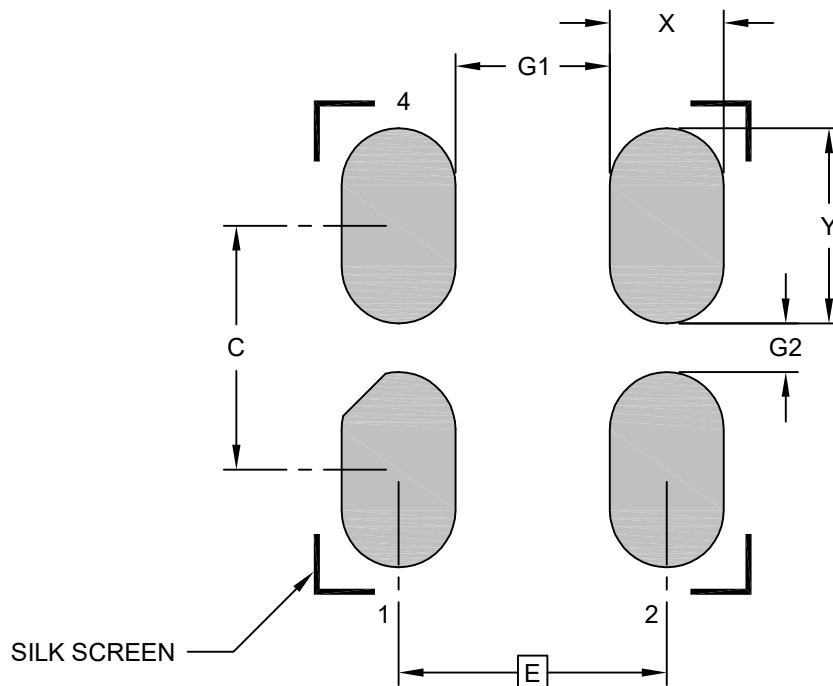

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E		1.65 BSC	
Contact Pad Spacing	C		1.50	
Contact Pad Width (Xnn)	X			0.70
Contact Pad Length (Xnn)	Y			1.20
Contact Pad to Contact Pad (Xnn)	G1	0.95		
Contact Pad to Contact Pad (Xnn)	G2	0.30		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.