



6-Lead Very Thin Plastic Dual Flat, No Lead Package (H7A) - 3.2x5.0 x0.9 Body [VDFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

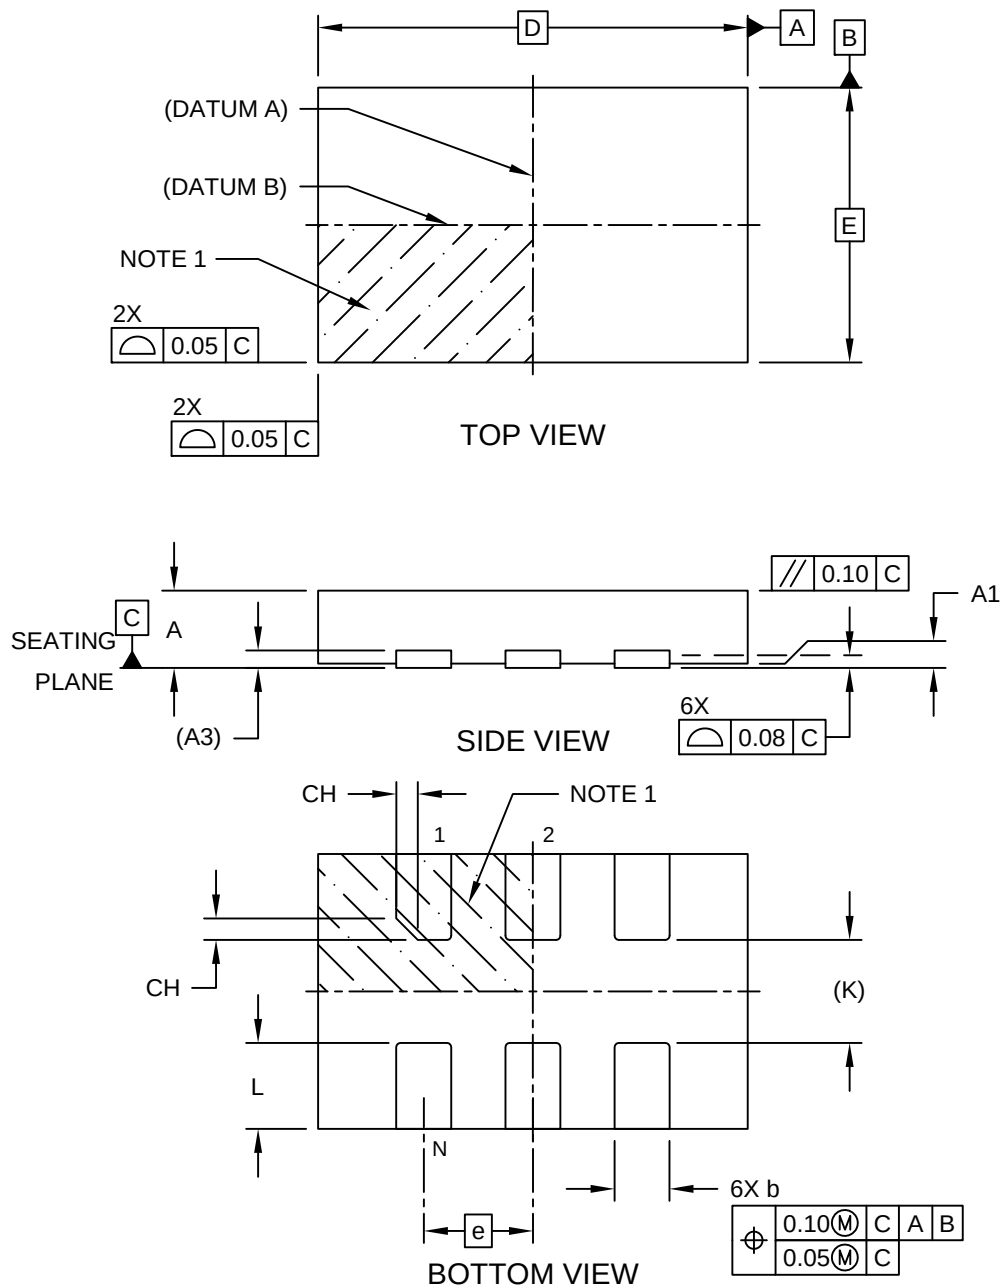

6-Lead Very Thin Plastic Dual Flat, No Lead Package (H7A) - 3.2x5.0 x0.9 Body [VDFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

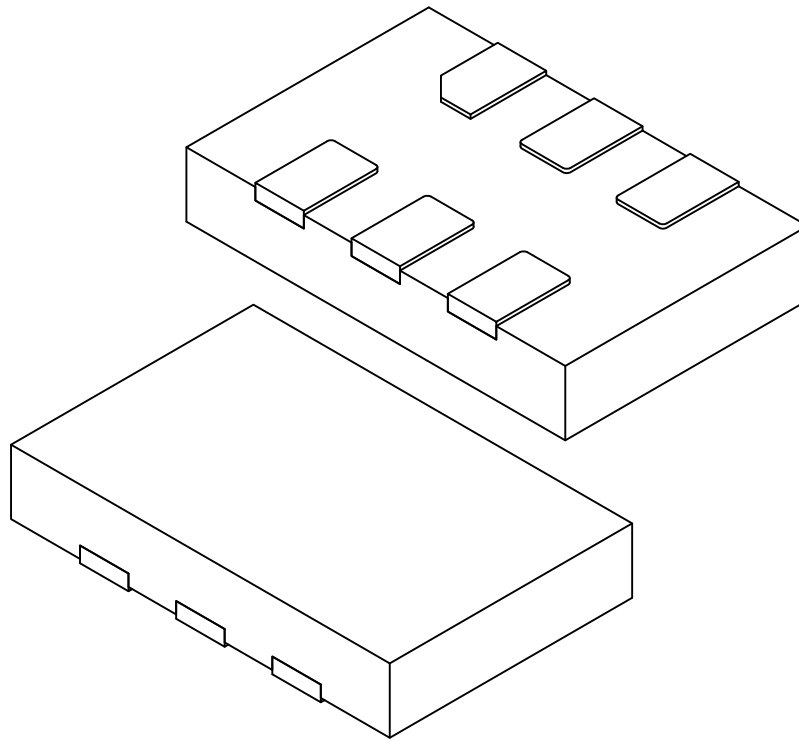


		Units	MILLIMETERS		
Dimension		Limits	MIN	NOM	MAX
Number of Terminals	N		6		
Pitch	e		1.27 BSC		
Overall Height	A		0.80	0.85	0.90
Standoff	A1		0.00	0.02	0.05
Terminal Thickness	A3		0.203 REF		
Overall Length	D		5.00 BSC		
Overall Width	E		3.20 BSC		
Terminal Width	b		0.59	0.64	0.69
Terminal Length	L		0.90	1.00	1.10
Terminal 1 Index Chamfer	CH		0.25 REF		
Terminal-to-Terminal	K		1.20 REF		

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

6-Lead Very Thin Plastic Dual Flat, No Lead Package (H7A) - 3.2x5.0 x0.9 Body [VDFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

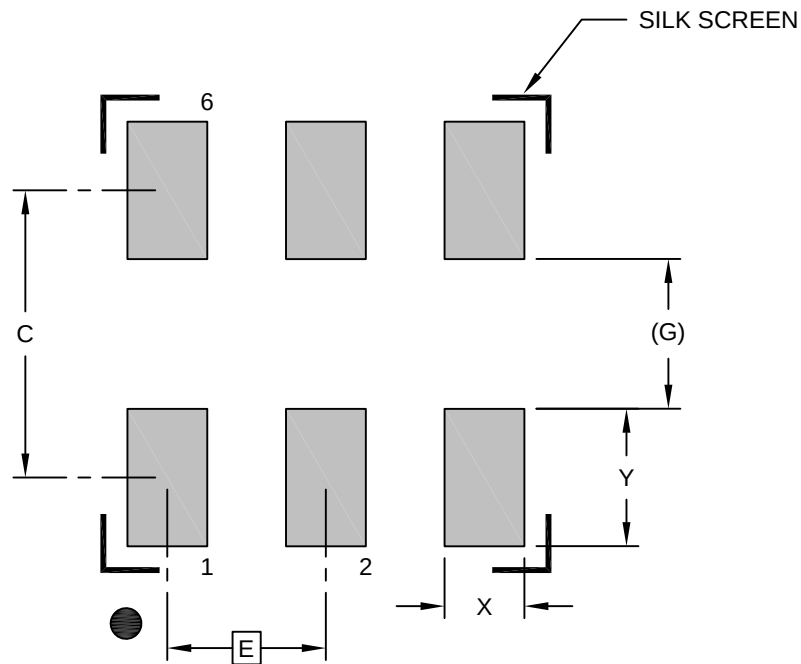

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.27 BSC		
Contact Pad Spacing	C		2.30	
Contact Pad Width (X6)	X			0.64
Contact Pad Length (X6)	Y			1.10
Contact Pad to Contact Pad (X4)	G	1.20 REF		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process