



10-Lead Very Thin Plastic Dual Flat, No Lead Package (J9A) - 2.5x2.5 mm Body [VDFN] With 1.9x1.2 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

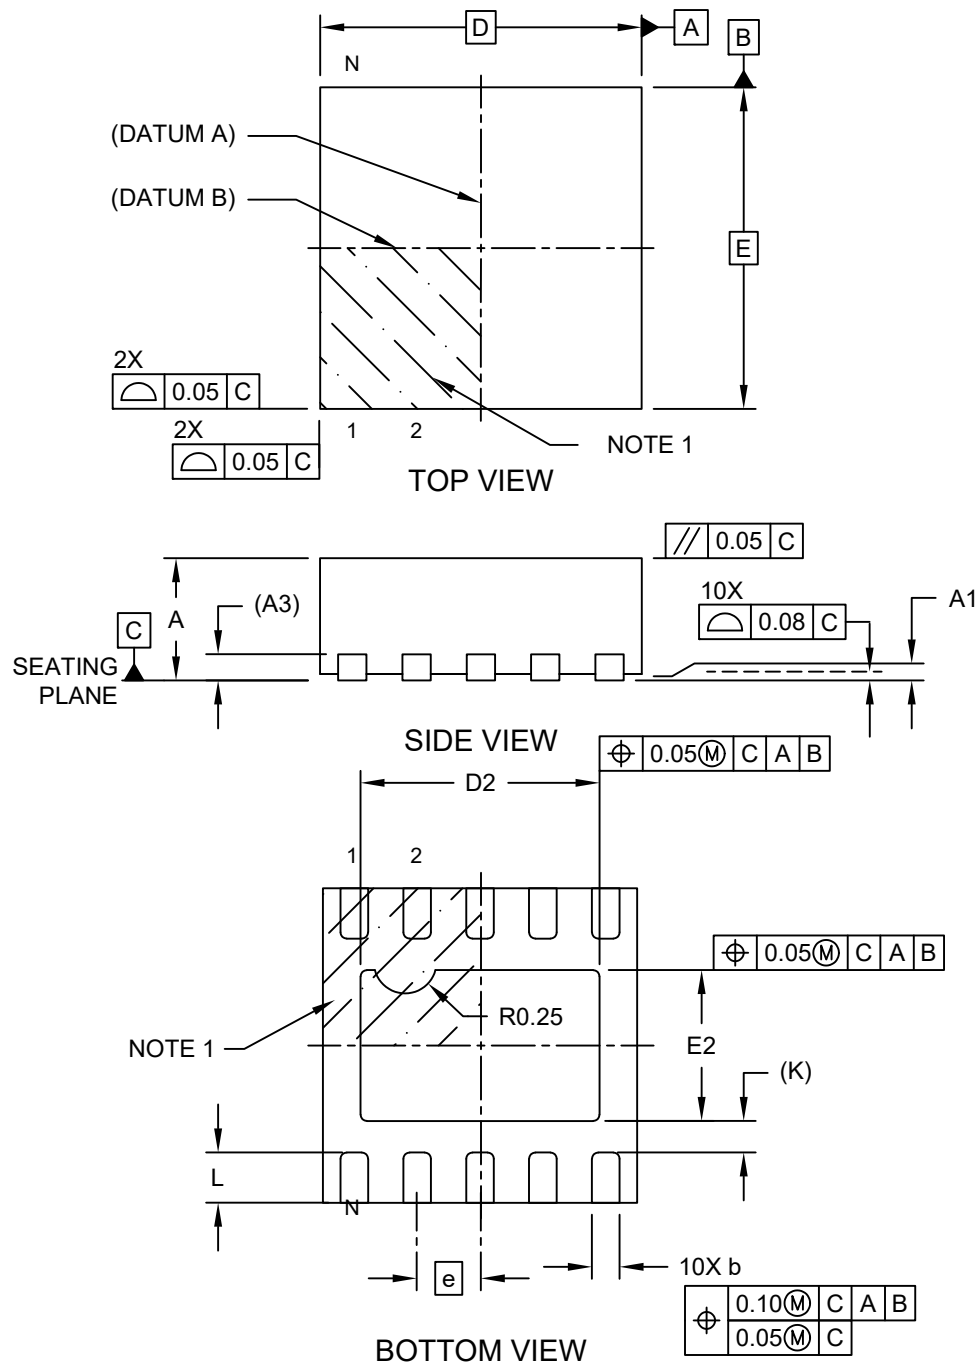

10-Lead Very Thin Plastic Dual Flat, No Lead Package (J9A) - 2.5x2.5 mm Body [VDFN] With 1.9x1.2 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

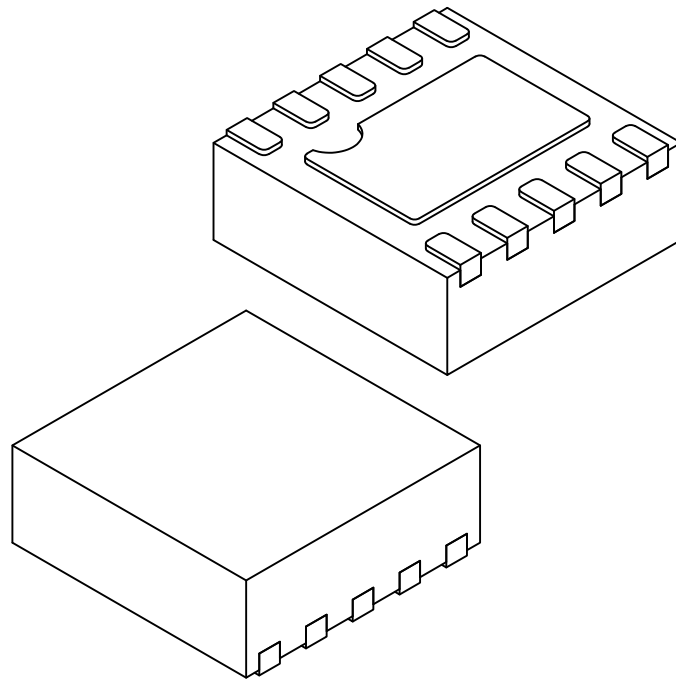


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	10		
Pitch	e	0.50 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.20	0.50
Terminal Thickness	A3	0.20 REF		
Overall Length	D	2.50 BSC		
Exposed Pad Length	D2	1.85	1.90	1.95
Overall Width	E	2.50 BSC		
Exposed Pad Width	E2	1.15	1.20	1.25
Terminal Width	b	0.17	0.22	0.27
Terminal Length	L	0.35	0.40	0.45
Terminal-to-Exposed-Pad	K	0.25 REF		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

10-Lead Very Thin Plastic Dual Flat, No Lead Package (J9A) - 2.5x2.5 mm Body [VDFN] With 1.9x1.2 mm Exposed Pad; Micrel Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

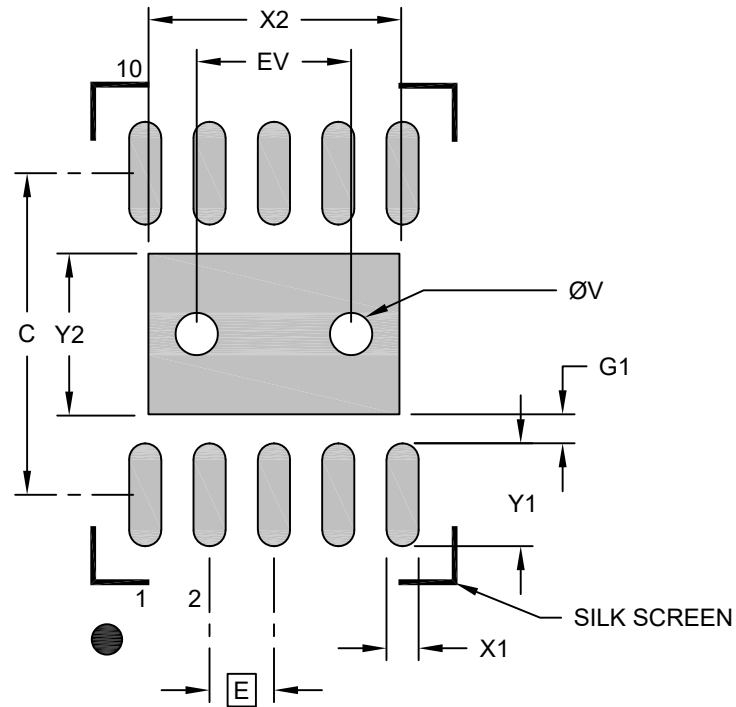

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Optional Center Pad Width	X2			1.95
Optional Center Pad Length	Y2			1.25
Contact Pad Spacing	C		2.50	
Contact Pad Width (X10)	X1			0.25
Contact Pad Length (X10)	Y1			0.80
Contact Pad to Center Pad (X10)	G1	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3018 Rev. A