


12-Lead Very Thin Plastic Dual Flat, No Lead Package (JQA) - 3x3 mm Body [VDFN] With 2.4x1.7 mm Exposed Pad; Micrel Legacy Package


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

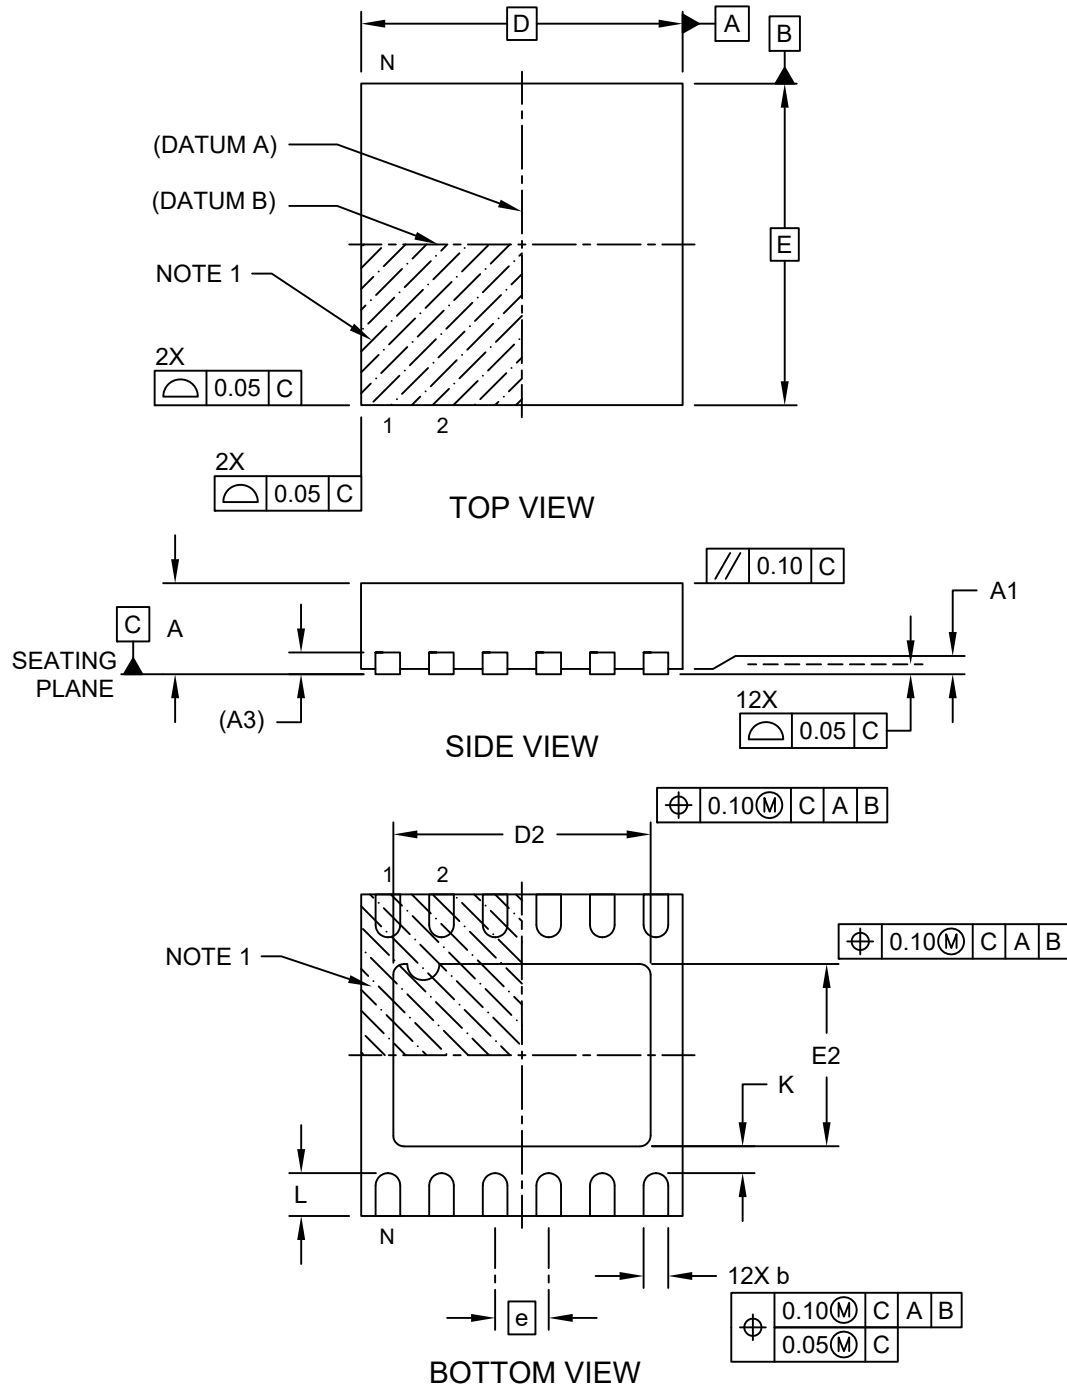

Microchip Technology Drawing C04-1020 Rev. A Sheet 1 of 2

12-Lead Very Thin Plastic Dual Flat, No Lead Package (JQA) - 3x3 mm Body [VDFN] With 2.4x1.7 mm Exposed Pad; Micrel Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

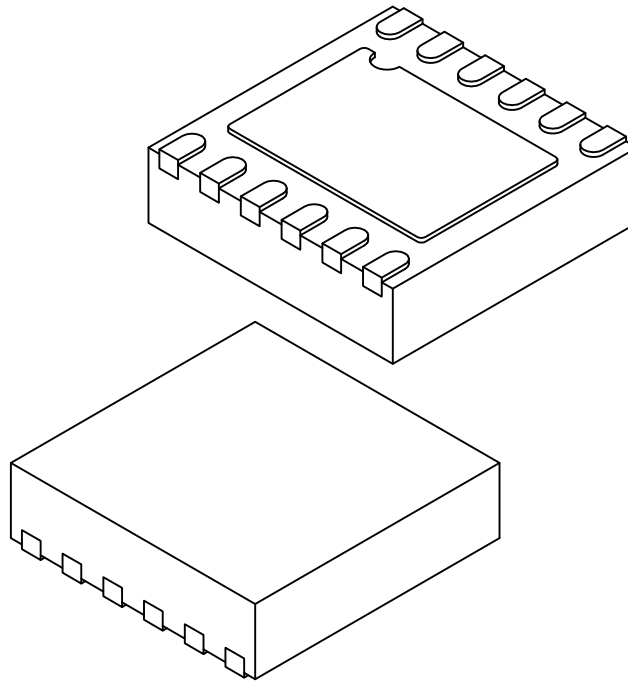


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		12		
Pitch	e		0.50 BSC		
Overall Height	A		0.80	0.85	0.90
Standoff	A1		0.00	0.02	0.05
Terminal Thickness	A3		0.203 REF		
Overall Length	D		3.00 BSC		
Exposed Pad Length	D2		2.35	2.40	2.45
Overall Width	E		3.00 BSC		
Exposed Pad Width	E2		1.65	1.70	1.75
Terminal Width	b		0.18	0.23	0.28
Terminal Length	L		0.35	0.40	0.45
Terminal-to-Exposed-Pad	K		0.20	-	-

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

12-Lead Very Thin Plastic Dual Flat, No Lead Package (JQA) - 3x3 mm Body [VDFN] With 2.4x1.7 mm Exposed Pad; Micrel Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

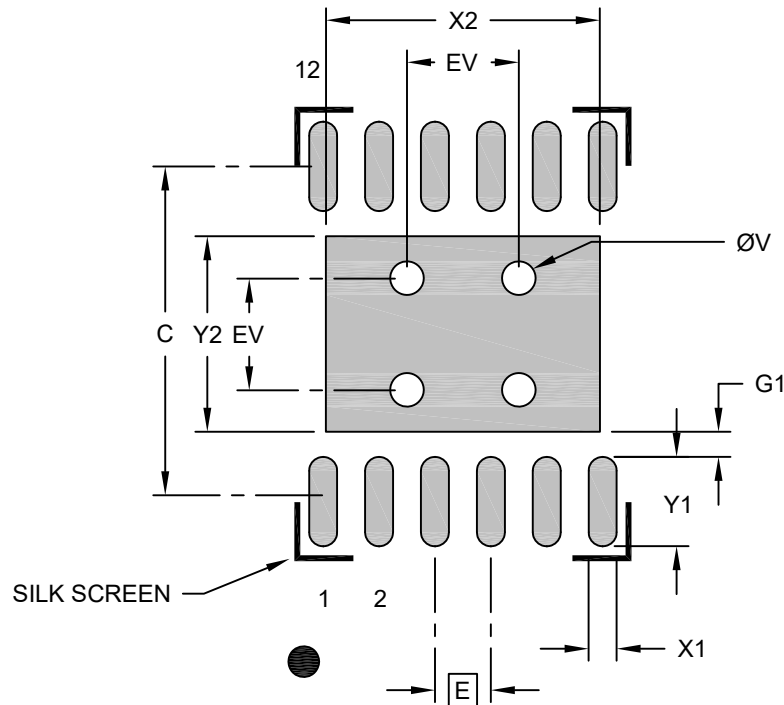

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Optional Center Pad Width	X2			2.45
Optional Center Pad Length	Y2			1.75
Contact Pad Spacing	C		3.00	
Contact Pad Width (X12)	X1			0.25
Contact Pad Length (X12)	Y1			0.80
Contact Pad to Center Pad (X12)	G1	0.20		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3020 Rev. A