



**24-Lead Very Thin Quad Flat, No Lead Package (NLA) - 4x3x0.9 mm Body [VQFN]  
Micrel Legacy Package FMLF34Q-24L; No Exposed Pad**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

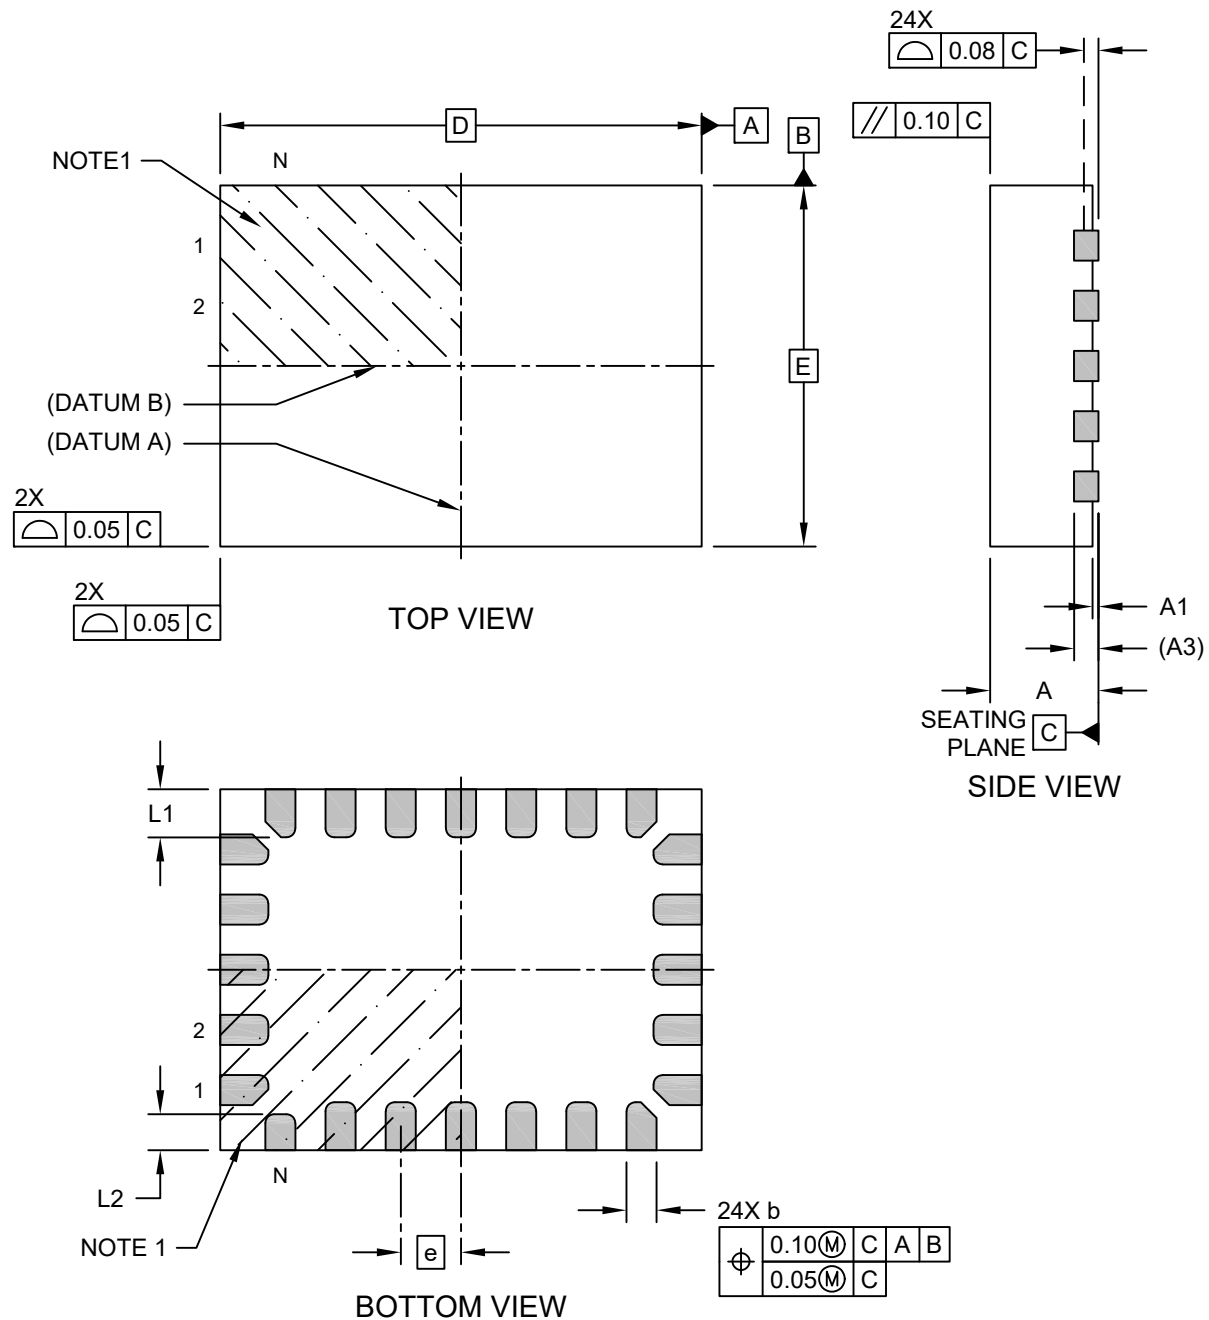

**24-Lead Very Thin Quad Flat, No Lead Package (NLA) - 4x3x0.9 mm Body [VQFN]  
Micrel Legacy Package FMLF34Q-24L; No Exposed Pad**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

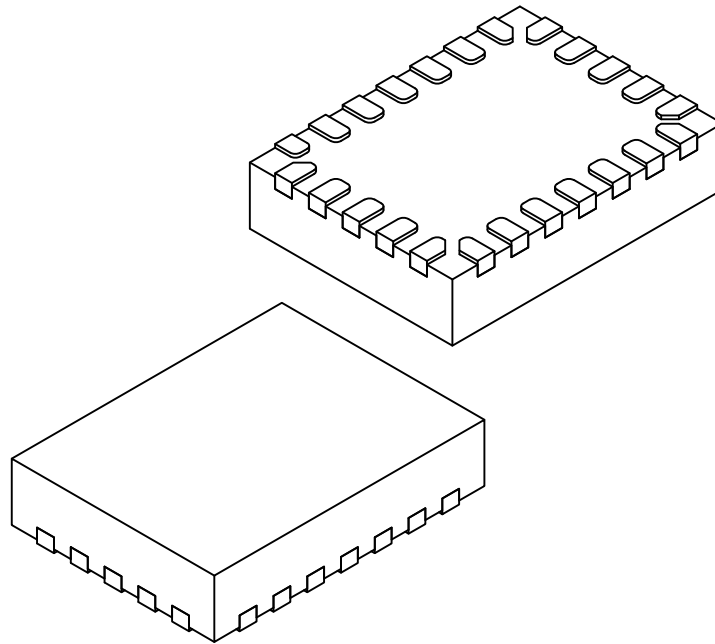


| Units               |    | MILLIMETERS |      |      |
|---------------------|----|-------------|------|------|
| Dimension Limits    |    | MIN         | NOM  | MAX  |
| Number of Terminals | N  | 24          |      |      |
| Pitch               | e  | 0.50 BSC    |      |      |
| Overall Height      | A  | 0.80        | 0.85 | 0.90 |
| Standoff            | A1 | 0.00        | 0.02 | 0.05 |
| Terminal Thickness  | A3 | 0.203 REF   |      |      |
| Overall Length      | D  | 4.00 BSC    |      |      |
| Overall Width       | E  | 3.00 BSC    |      |      |
| Terminal Width      | b  | 0.20        | 0.25 | 0.30 |
| Terminal Length     | L1 | 0.35        | 0.40 | 0.45 |
| Terminal 1 Length   | L2 | 0.25        | 0.30 | 0.35 |

**Notes:**

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.

**24-Lead Very Thin Quad Flat, No Lead Package (NLA) - 4x3x0.9 mm Body [VQFN]  
Micrel Legacy Package FMLF34Q-24L; No Exposed Pad**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

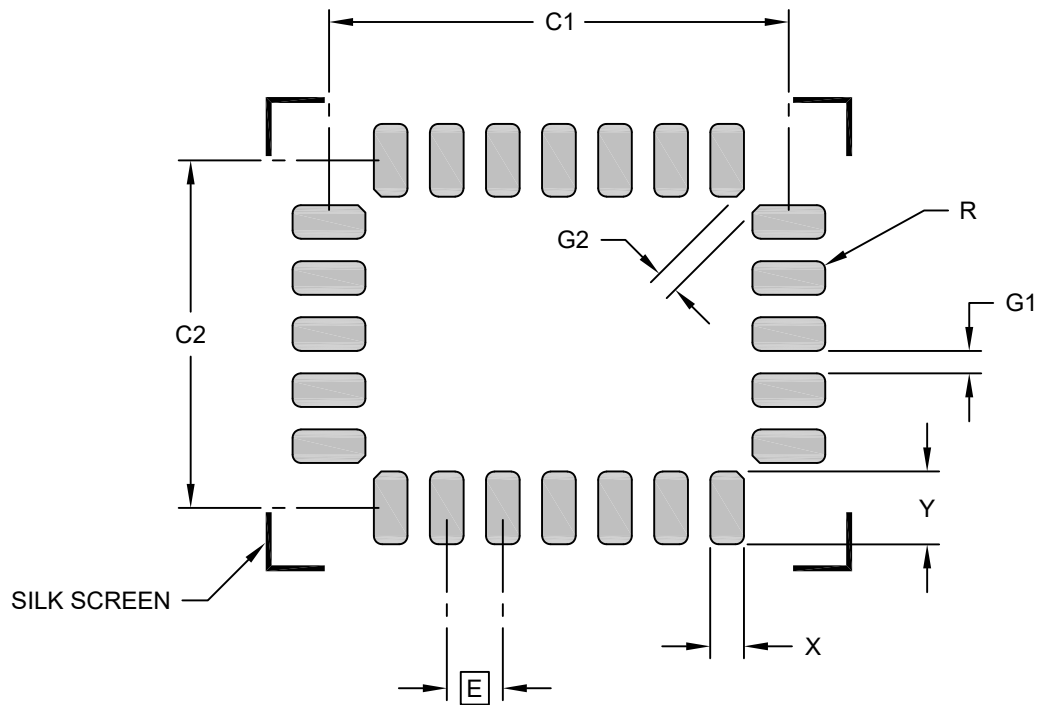

**RECOMMENDED LAND PATTERN**

| Units                            |    | MILLIMETERS |          |      |
|----------------------------------|----|-------------|----------|------|
| Dimension Limits                 |    | MIN         | NOM      | MAX  |
| Contact Pitch                    | E  |             | 0.50 BSC |      |
| Contact Pad Spacing              | C1 |             | 4.10     |      |
| Contact Pad Spacing              | C2 |             | 3.10     |      |
| Contact Pad Fillet               | R  |             | 0.075    |      |
| Contact Pad Width (Xnn)          | X  |             |          | 0.30 |
| Contact Pad Length (Xnn)         | Y  |             |          | 0.65 |
| Contact Pad to Contact Pad (Xnn) | G1 | 0.20        |          |      |
| Contact Pad to Contact Pad (Xnn) | G2 | 0.20        |          |      |

**Notes:**

- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3032 Rev A