



26-Lead Very Thin Plastic Quad Flat, No Lead Package (P2A) - 4x4 mm Body [VQFN] With Multiple Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

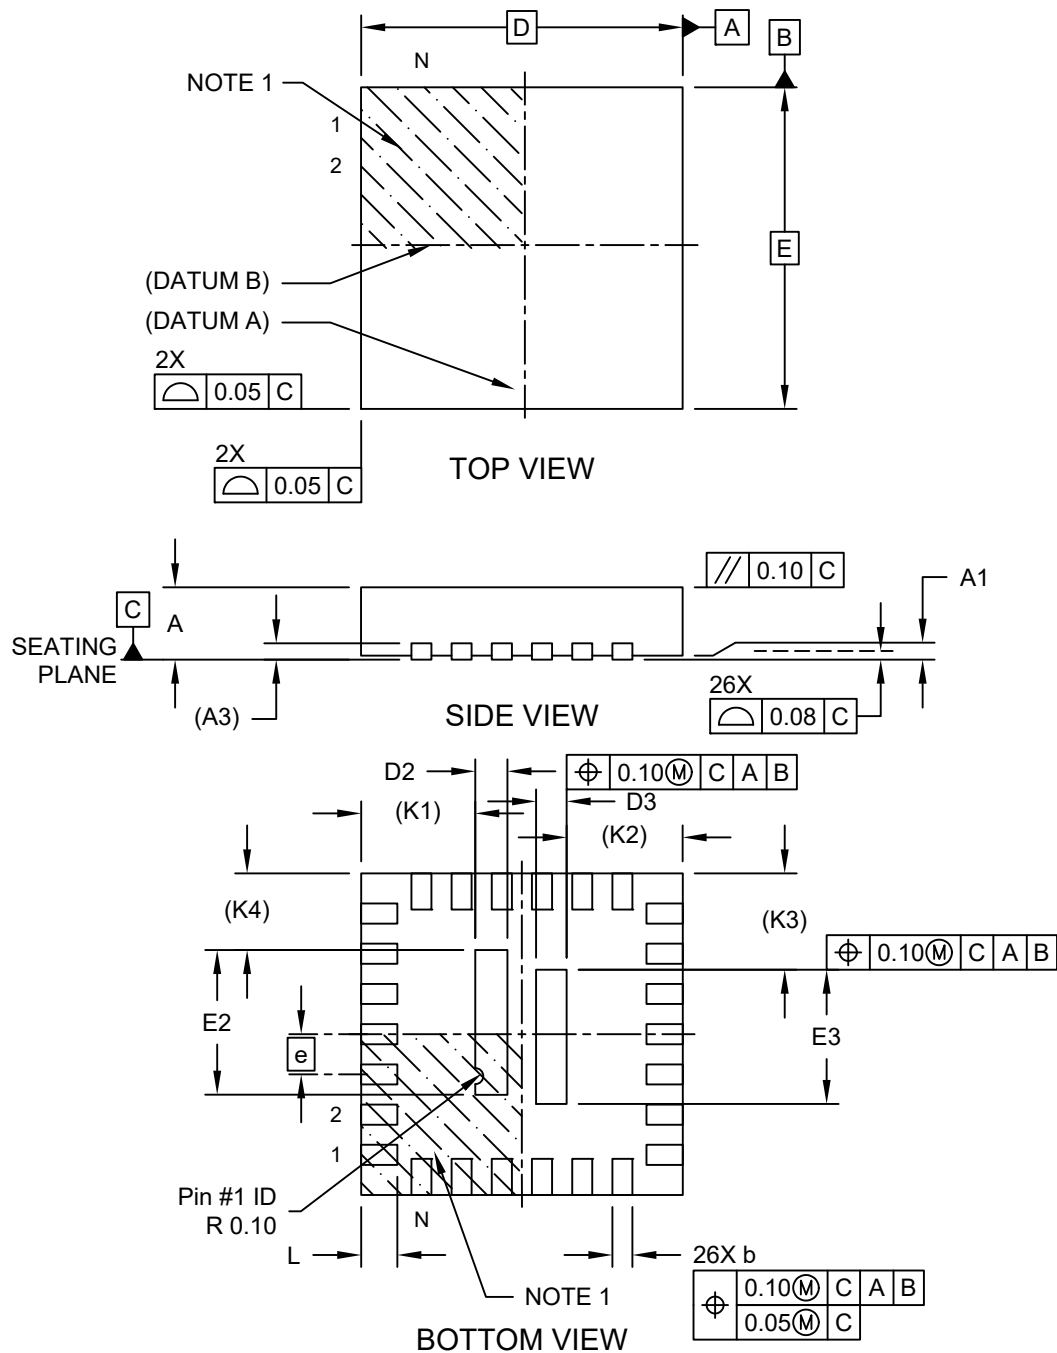

26-Lead Very Thin Plastic Quad Flat, No Lead Package (P2A) - 4x4 mm Body [VQFN] With Multiple Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

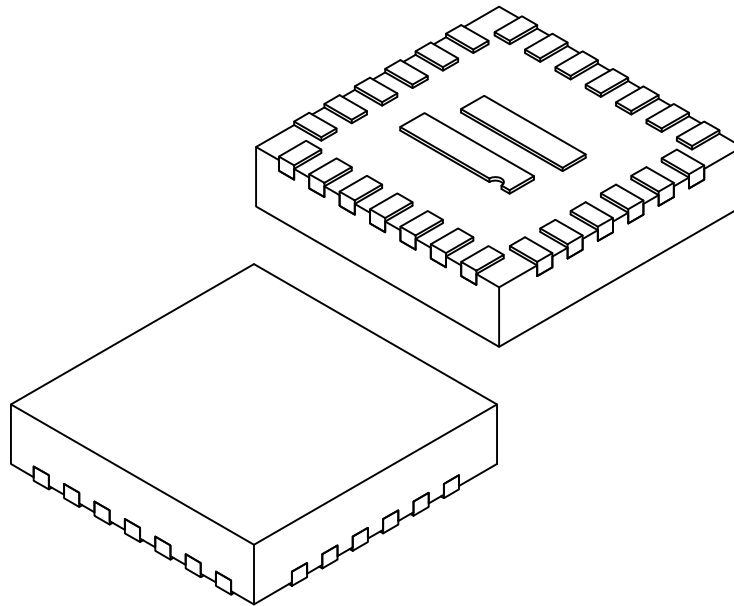


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	26		
Pitch	e	0.50 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.203 REF		
Overall Length	D	4.00 BSC		
Exposed Pad Length	D2	0.35	0.40	0.45
Exposed Pad Length	D3	0.33	0.38	0.43
Overall Width	E	4.00 BSC		
Exposed Pad Width	E2	1.75	1.80	1.85
Exposed Pad Width	E3	1.62	1.67	1.72
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.40	0.45	0.50
Body Edge-to-Exposed-Pad	K1	1.42 REF		
Body Edge-to-Exposed-Pad	K2	1.44 REF		
Body Edge-to-Exposed-Pad	K3	1.20 REF		
Body Edge-to-Exposed-Pad	K4	0.95 REF		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

26-Lead Very Thin Plastic Quad Flat, No Lead Package (P2A) - 4x4 mm Body [VQFN] With Multiple Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

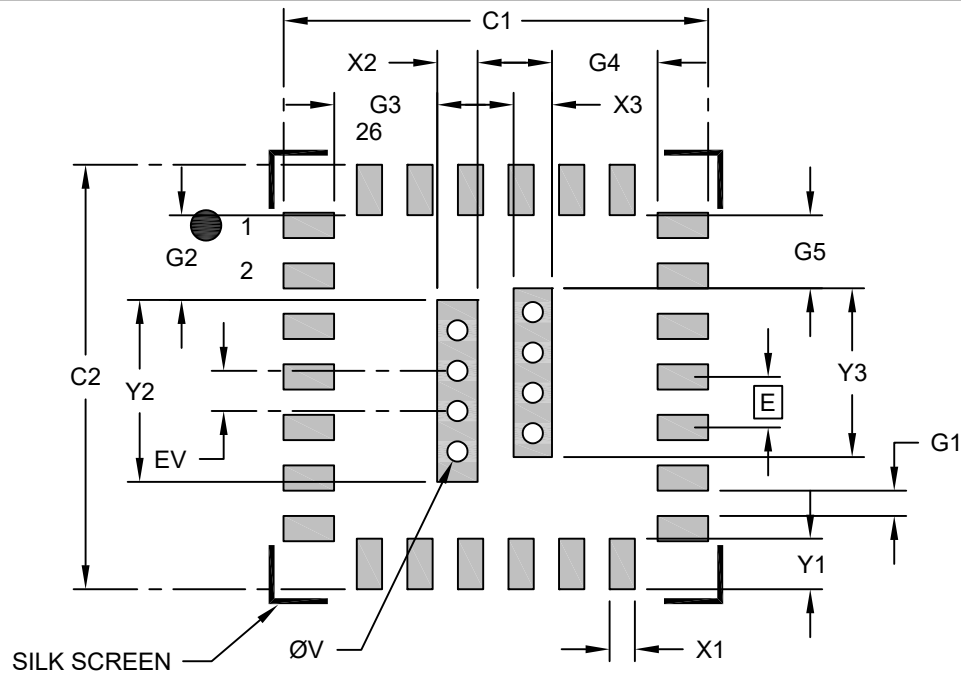

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Center Pad Width	X2			0.42
Center Pad Length	Y2			1.82
Center Pad Width	X3			0.40
Center Pad Length	Y3			1.69
Contact Pad Spacing	C1		4.20	
Contact Pad Spacing	C2		4.20	
Contact Pad Width (X26)	X1			0.27
Contact Pad Length (X26)	Y1			0.52
Contact Pad to Contact Pad (X22)	G1	0.20		
Contact Pad to Center Pad	G2		0.84	
Contact Pad to Center Pad	G3		1.02	
Contact Pad to Center Pad	G4		1.04	
Contact Pad to Center Pad	G5		0.72	
Thermal Via Diameter	V		0.20	
Thermal Via Pitch	EV		0.40	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3034 Rev A