



34-Lead Very Thin Plastic Quad Flat, No Lead Package (P8A) - 4x6 mm Body [VQFN] With Multiple Fused Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

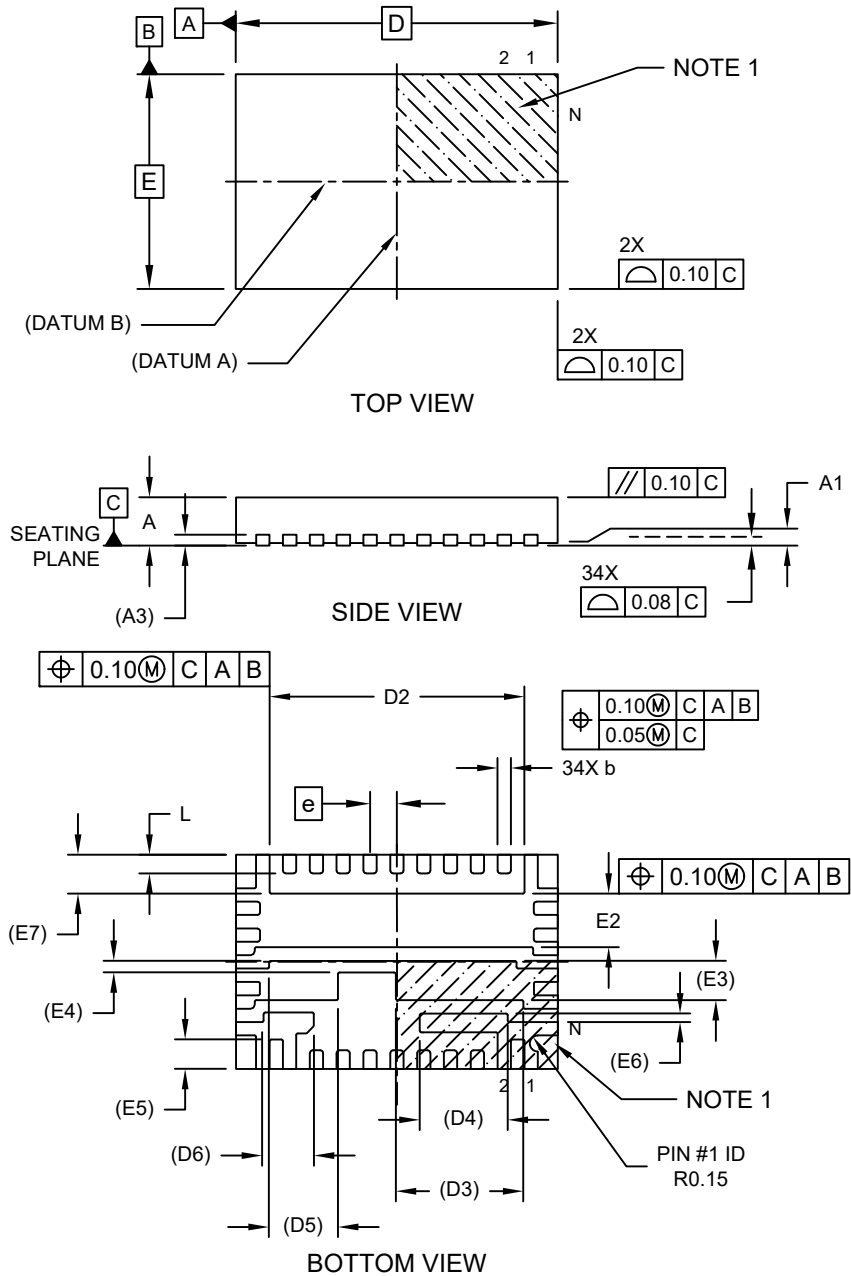

34-Lead Very Thin Plastic Quad Flat, No Lead Package (P8A) - 4x6 mm Body [VQFN] With Multiple Fused Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

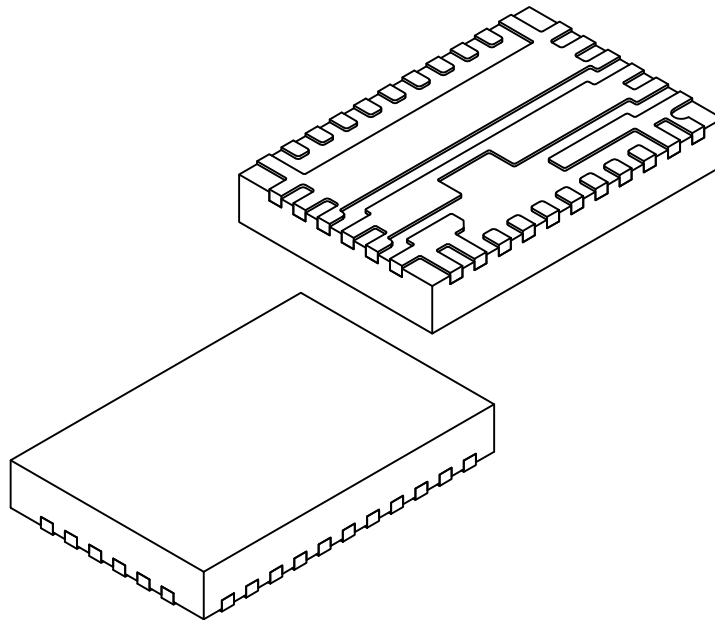

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	34		
Pitch	e	0.50 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.203 REF		
Overall Length	D	6.00 BSC		
Overall Width	E	4.00 BSC		
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.30	0.35	0.40


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Exposed Pad Length	D2	4.70	4.75	4.80
Exposed Pad Length	D3	2.38 REF		
Exposed Pad Length	D4	1.64 REF		
Exposed Pad Length	D5	1.29 REF		
Exposed Pad Length	D6	0.97 REF		
Exposed Pad Width	E2	0.95	1.00	1.05
Exposed Pad Width	E3	0.73 REF		
Exposed Pad Width	E4	0.21 REF		
Exposed Pad Width	E5	0.55 REF		
Exposed Pad Width	E6	0.16 REF		
Exposed Pad Width	E7	0.73 REF		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

34-Lead Very Thin Plastic Quad Flat, No Lead Package (P8A) - 4x6 mm Body [VQFN] With Multiple Fused Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

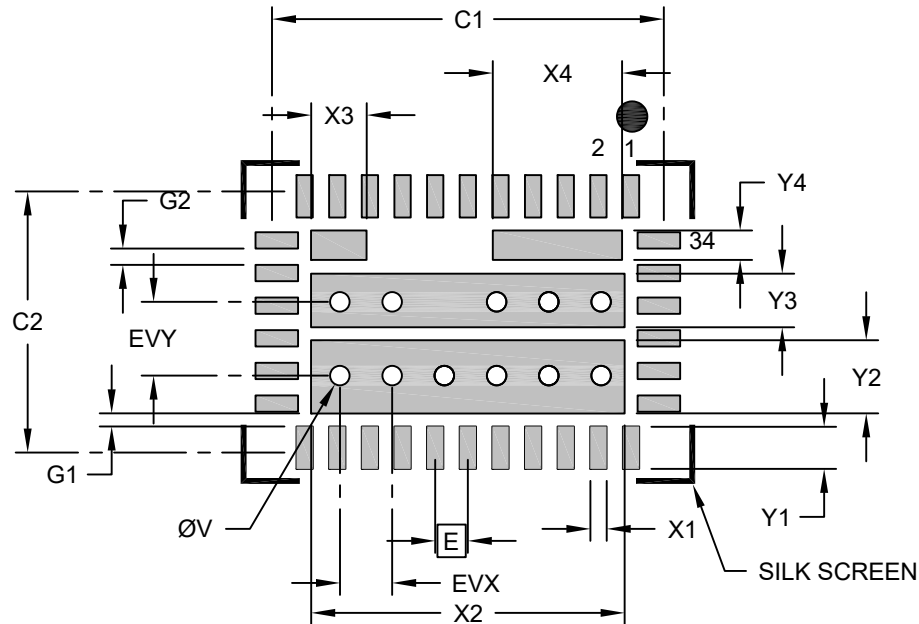

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Center Pad Width	X2			4.82
Center Pad Width	X3			0.87
Center Pad Width	X4			2.00
Center Pad Length	Y2			1.14
Center Pad Length	Y3			0.84
Center Pad Length	Y4			0.47
Contact Pad Spacing	C1		4.00	
Contact Pad Spacing	C2		6.00	
Contact Pad Width (X34)	X1			0.27
Contact Pad Length (X34)	Y1			0.67
Contact Pad to Center Pad (X34)	G1	0.20		
Contact Pad to Contact Pad (X30)	G2	0.25		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EVX		0.80	
Thermal Via Pitch	EVY		1.13	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3037 Rev A