


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>



32-Lead Very Thin Plastic Quad Flat, No Lead Package (PCA) - 5x5x0.9 mm Body [VQFN] With Fused Terminals; Micrel Legacy Package FQFN55-32LD-PL-1

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

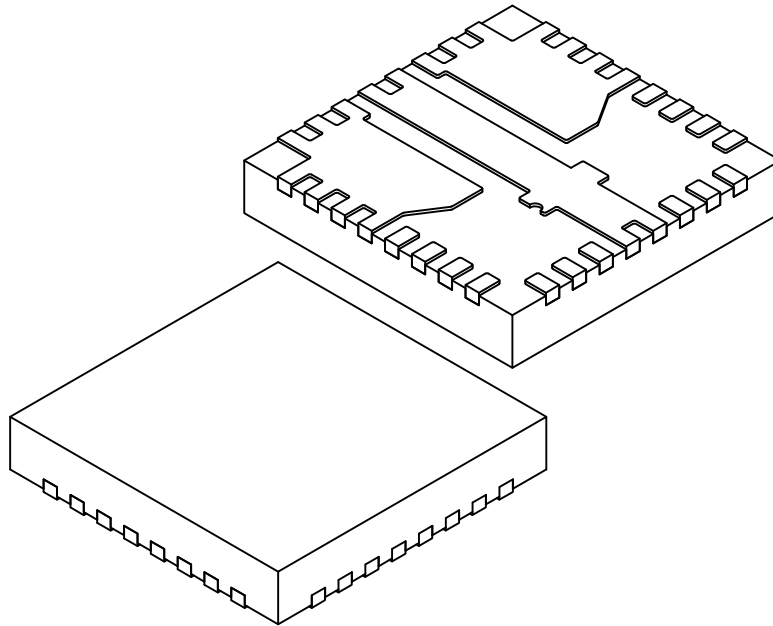


Dimension	Units	MILLIMETERS		
		MIN	NOM	MAX
Number of Terminals	N	32		
Pitch	e	0.50 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.203 REF		
Overall Length	D	5.00 BSC		
Exposed Pad Length (X2)	D2	1.325	1.374	1.425
Exposed Pad Length	D3	1.15	1.20	1.25
Overall Width	E	5.00 BSC		
Exposed Pad Width (X2)	E2	2.331	2.381	2.431
Exposed Pad Width	E3	4.25	4.30	4.35
Exposed Pad Width	E4	0.439	0.489	0.539
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.35	0.40	0.45

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

32-Lead Very Thin Plastic Quad Flat, No Lead Package (PCA) - 5x5x0.9 mm Body [VQFN] With Fused Terminals; Micrel Legacy Package FQFN55-32LD-PL-1

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

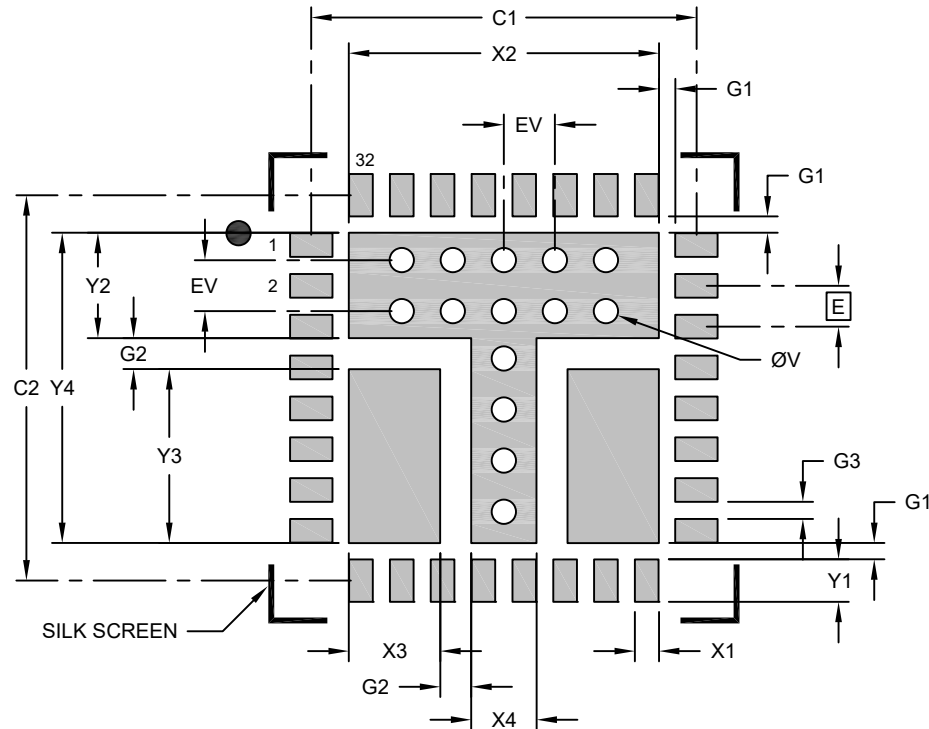

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Center Pad Width	X2			3.80
Center Pad Width (X2)	X3			1.12
Center Pad Width	X4			0.80
Center Pad Length	Y2			1.29
Center Pad Length (X2)	Y3			2.13
Center Pad Length	Y4			3.80
Contact Pad Spacing	C1		4.72	
Contact Pad Spacing	C2		4.72	
Contact Pad Width	X1			0.29
Contact Pad Length	Y1			0.52
Contact Pad to Center Pad	G1	0.20		
Center Pad to Center Pad	G2	0.38		
Contact Pad to Contact Pad (X28)	G3	0.21		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		0.625	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3039 Rev A