



38-Lead Very Thin Plastic Quad Flat, No Lead Package (PPA) - 5x6 mm Body [VQFN] With Multiple Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

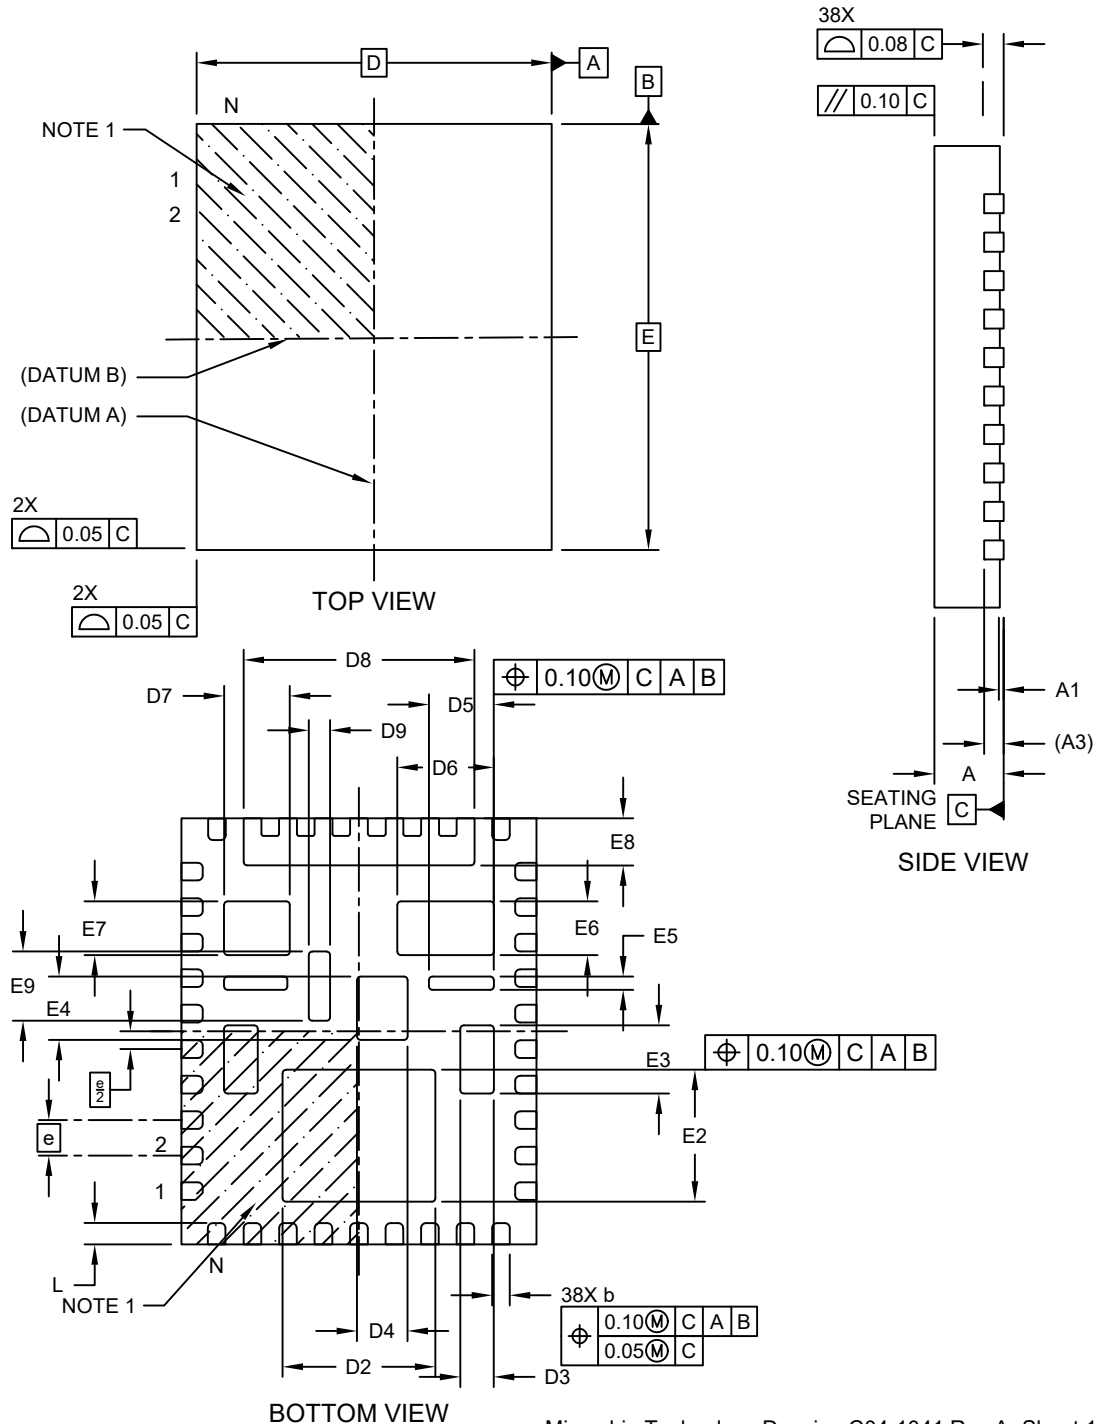

38-Lead Very Thin Plastic Quad Flat, No Lead Package (PPA) - 5x6 mm Body [VQFN] With Multiple Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

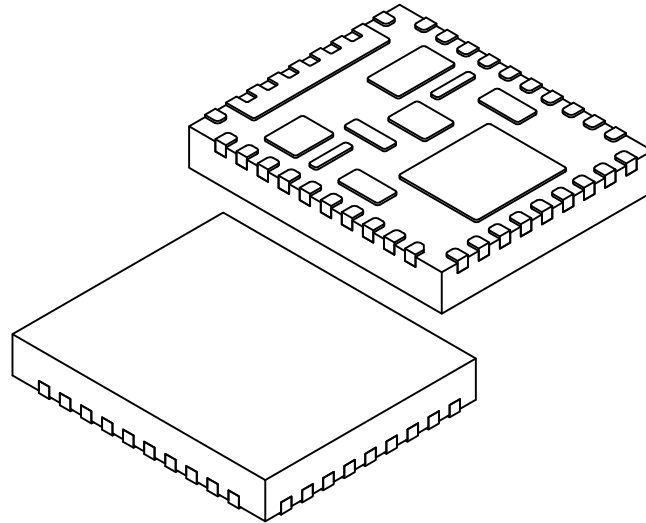

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	38		
Pitch	e	0.50 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.203 REF		
Overall Length	D	5.00 BSC		
Overall Width	E	6.00 BSC		
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.25	0.30	0.35


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Exposed Pad Length	D2	2.10	2.15	2.20
Exposed Pad Length (X2)	D3	0.43	0.48	0.53
Exposed Pad Length	D4	0.70 REF		
Exposed Pad Length (X2)	D5	0.91 REF		
Exposed Pad Length	D6	1.36 REF		
Exposed Pad Length	D7	0.93 REF		
Exposed Pad Length	D8	3.25 REF		
Exposed Pad Length	D9	0.30 REF		
Exposed Pad Width	E2	1.81	1.86	1.91
Exposed Pad Width (X2)	E3	0.91	0.96	1.01
Exposed Pad Width	E4	0.84	0.89	0.94
Exposed Pad Width (X2)	E5	0.14	0.19	0.24
Exposed Pad Width	E6	0.71	0.76	0.81
Exposed Pad Width	E7	0.71	0.76	0.81
Exposed Pad Width	E8	0.61	0.66	0.71
Exposed Pad Width	E9	0.92	0.97	1.02

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

38-Lead Very Thin Plastic Quad Flat, No Lead Package (PPA) - 5x6 mm Body [VQFN] With Multiple Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

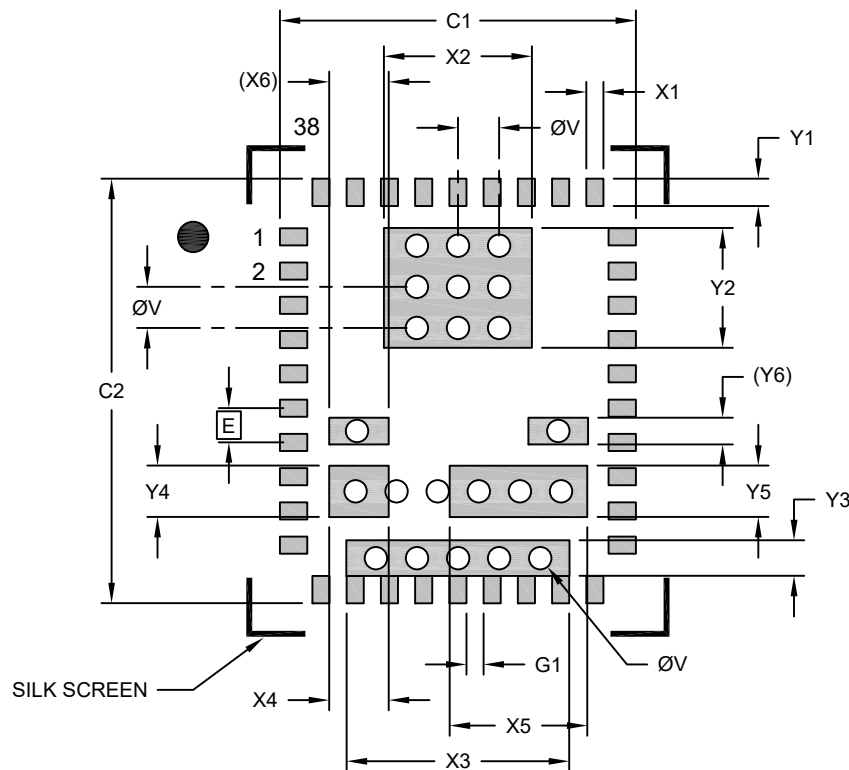

RECOMMENDED LAND PATTERN

Units		MILLIMETERS			Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX	Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC			Exposed Pad Length	X2			2.17
Contact Pad Spacing	C1		5.20		Exposed Pad Length	X3			3.28
Contact Pad Spacing	C2		6.20		Exposed Pad Length	X4			0.89
Contact Pad Width (X38)	X1			0.27	Exposed Pad Length	X5			2.03
Contact Pad Length (X38)	Y1			0.42	Exposed Pad Length (X2)	X6	0.87 REF		
Contact Pad to Contact Pad (X34)	G1	0.25			Exposed Pad Width	Y2			1.77
Thermal Via Diameter	E		0.33		Exposed Pad Width	Y3			0.54
Thermal Via Pitch	EV		0.60		Exposed Pad Width	Y4			0.77
					Exposed Pad Width	Y5			0.77
					Exposed Pad Width (X2)	Y6	0.39 REF		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3041 Rev A