



# 4-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HEA) - 1.2x1.2x0.6 mm Body [UDFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

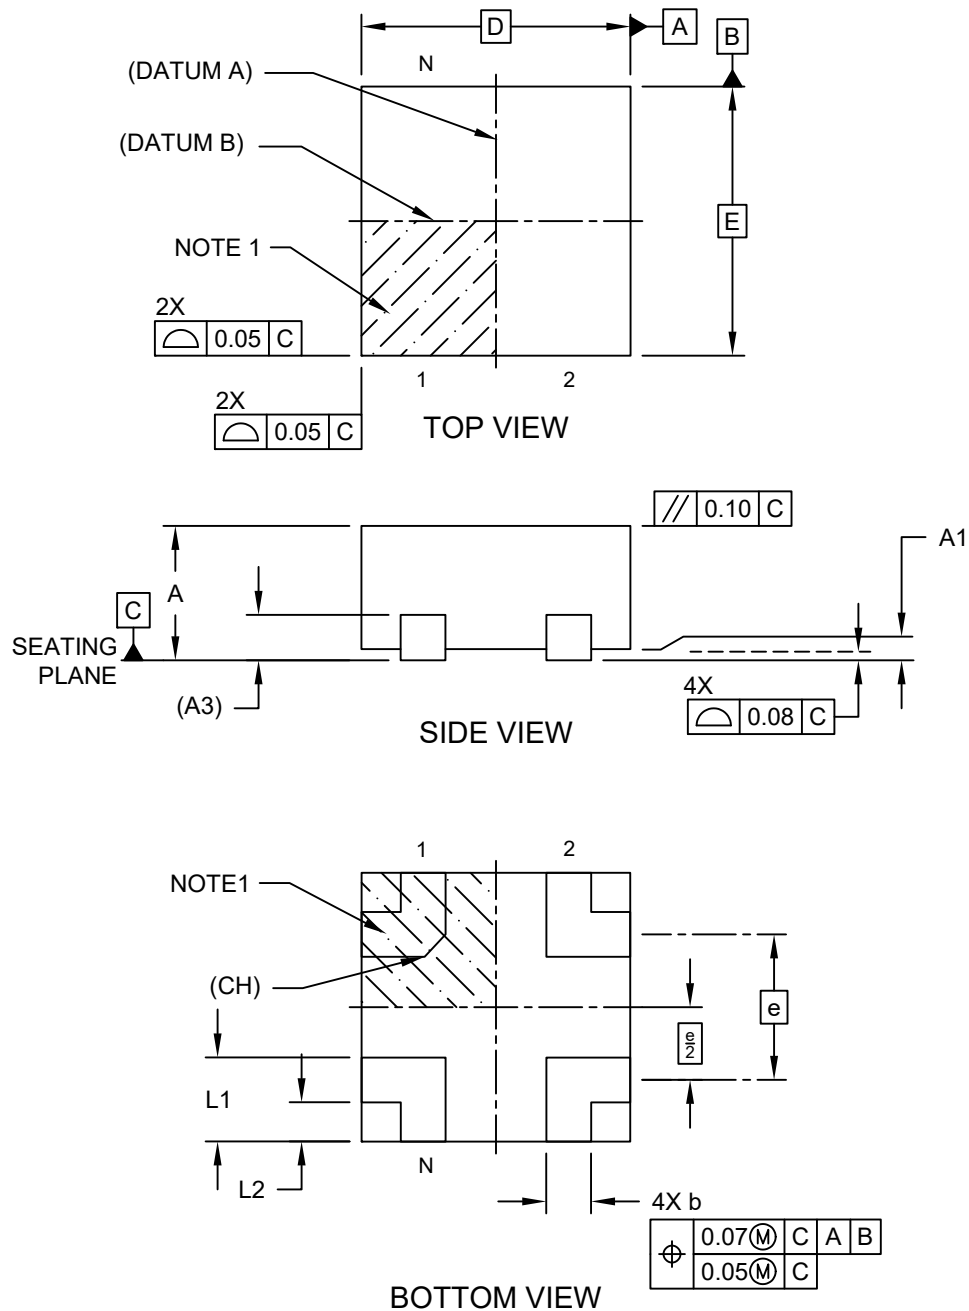

#### 4-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HEA) - 1.2x1.2x0.6 mm Body [UDFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

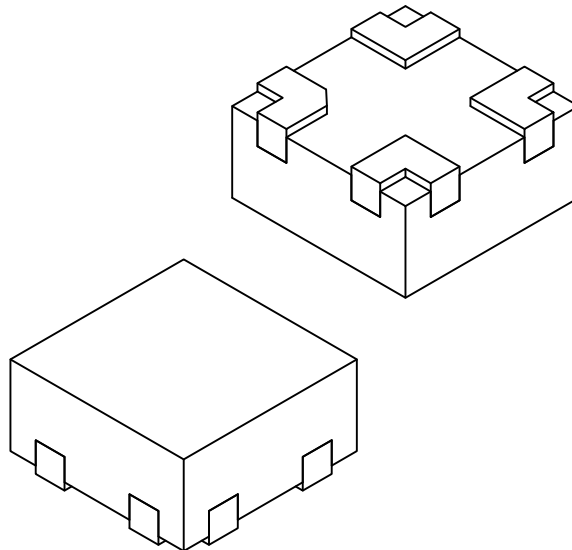


| Units               |    | MILLIMETERS |       |       |
|---------------------|----|-------------|-------|-------|
| Dimension Limits    |    | MIN         | NOM   | MAX   |
| Number of Terminals | N  | 4           |       |       |
| Pitch               | e  | 0.65 BSC    |       |       |
| Overall Height      | A  | 0.50        | 0.55  | 0.60  |
| Standoff            | A1 | 0.00        | 0.02  | 0.05  |
| Terminal Thickness  | A3 | 0.203 REF   |       |       |
| Overall Length      | D  | 1.20 BSC    |       |       |
| Overall Width       | E  | 1.20 BSC    |       |       |
| Terminal Width      | b  | 0.15        | 0.20  | 0.25  |
| Terminal Length     | L1 | 0.325       | 0.375 | 0.425 |
| Edge to Terminal    | L2 | 0.125       | 0.175 | 2.25  |

**Notes:**

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.

#### 4-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HEA) - 1.2x1.2x0.6 mm Body [UDFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

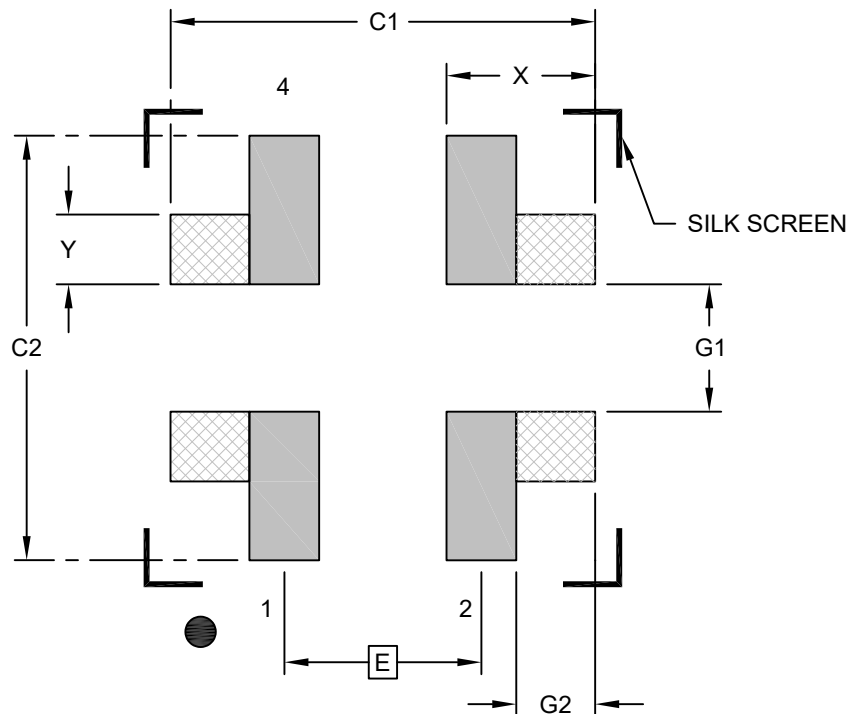

#### RECOMMENDED LAND PATTERN

|                                 | Units  | MILLIMETERS |          |      |
|---------------------------------|--------|-------------|----------|------|
| Dimension                       | Limits | MIN         | NOM      | MAX  |
| Contact Pitch                   | E      |             | 0.65 BSC |      |
| Contact Pad Spacing             | C1     |             | 1.40     |      |
| Contact Pad Spacing             | C2     |             | 1.40     |      |
| Contact Pad Width (X4)          | X      |             |          | 0.51 |
| Contact Pad Length (X4)         | Y      |             |          | 0.25 |
| Contact Pad to Contact Pad (X4) | G1     | 0.42        |          |      |
| Edge to Contact Pad (X4)        | G2     | 0.24        |          |      |

#### Notes:

1. Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3044 Rev A