



6-Lead Ultra Thin Plastic Quad Flat, No Lead Package (MBA) - 1.2x1.2x0.6 mm Body [UQFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

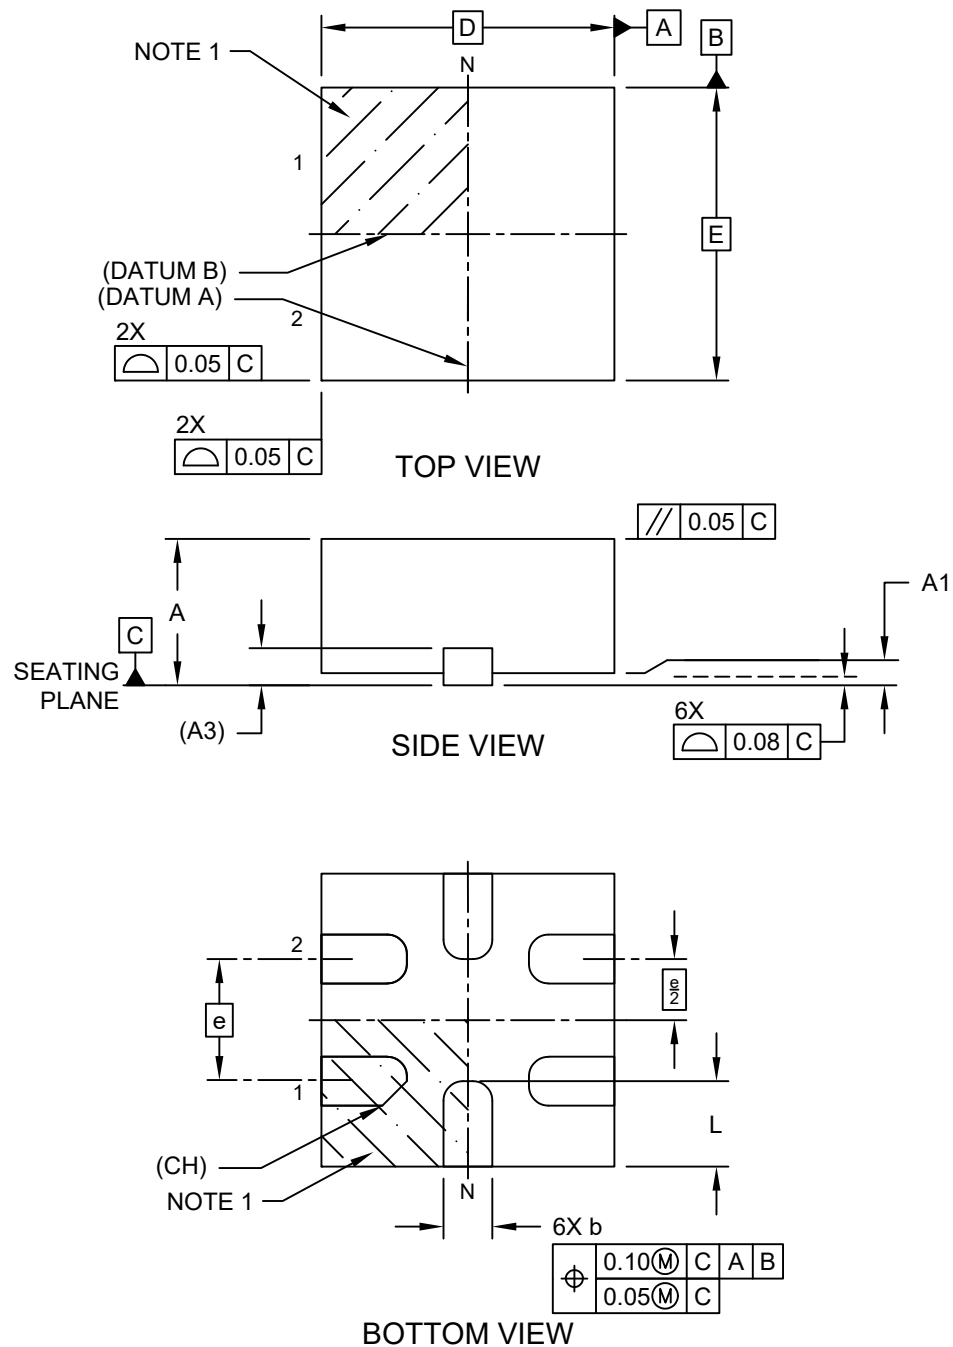

**6-Lead Ultra Thin Plastic Quad Flat, No Lead Package (MBA) -
1.2x1.2x0.6 mm Body [UQFN]**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

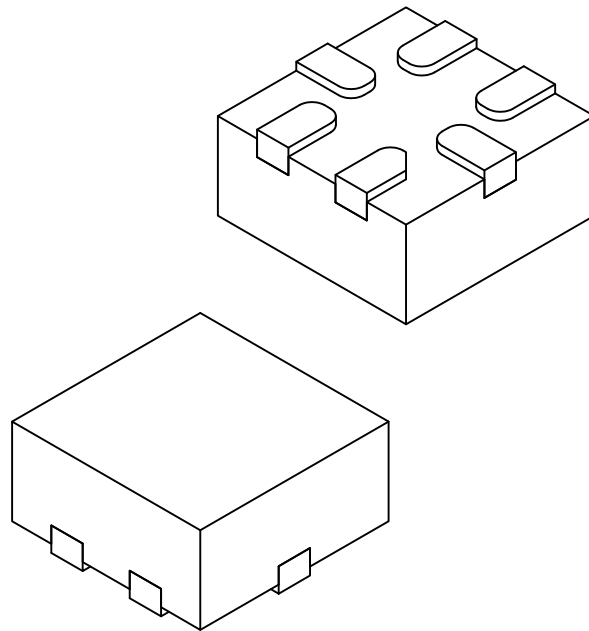


Dimension	Units	MILLIMETERS		
	Limits	MIN	NOM	MAX
Number of Terminals	N	6		
Pitch	e	0.50 BSC		
Overall Height	A	0.50	0.55	0.60
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.152 REF		
Overall Length	D	1.20 BSC		
Overall Width	E	1.20 BSC		
Terminal Width	b	0.15	0.20	0.25
Terminal Length	L	0.30	0.35	0.40

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

6-Lead Ultra Thin Plastic Quad Flat, No Lead Package (MBA) - 1.2x1.2x0.6 mm Body [UQFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

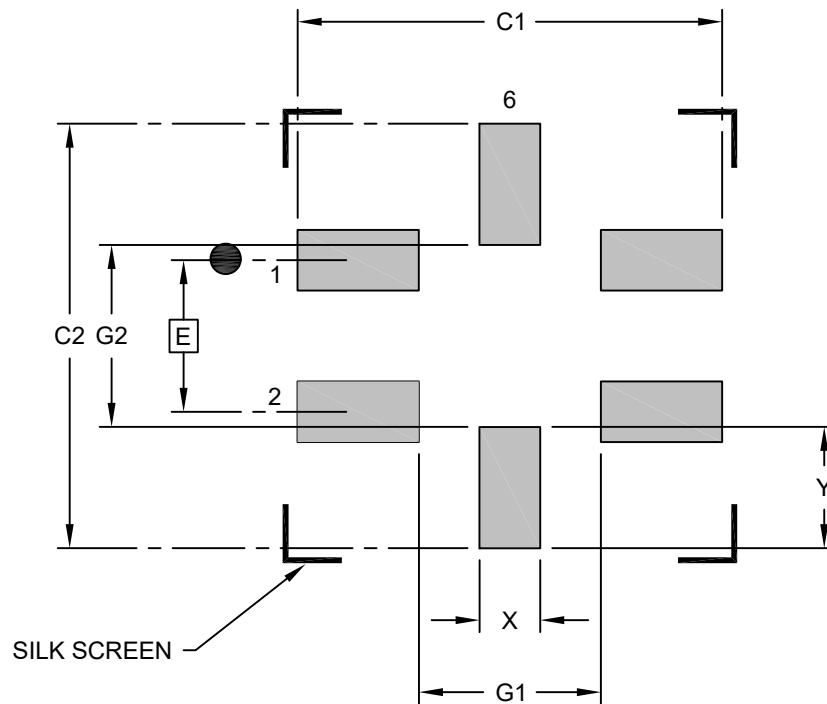

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E		0.50 BSC	
Contact Pad Spacing	C1		1.40	
Contact Pad Spacing	C2		1.40	
Contact Pad Width (X6)	X			0.22
Contact Pad Length (X6)	Y			0.42
Contact Pad to Contact Pad (X2)	G1	0.58		
Contact Pad to Contact Pad (X1)	G2	0.58		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3046 Rev A