


20-Lead Thin Plastic Quad Flat, No Lead Package (MAA) - 2.5x3 mm Body [TQFN]


With Multiple Fused Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

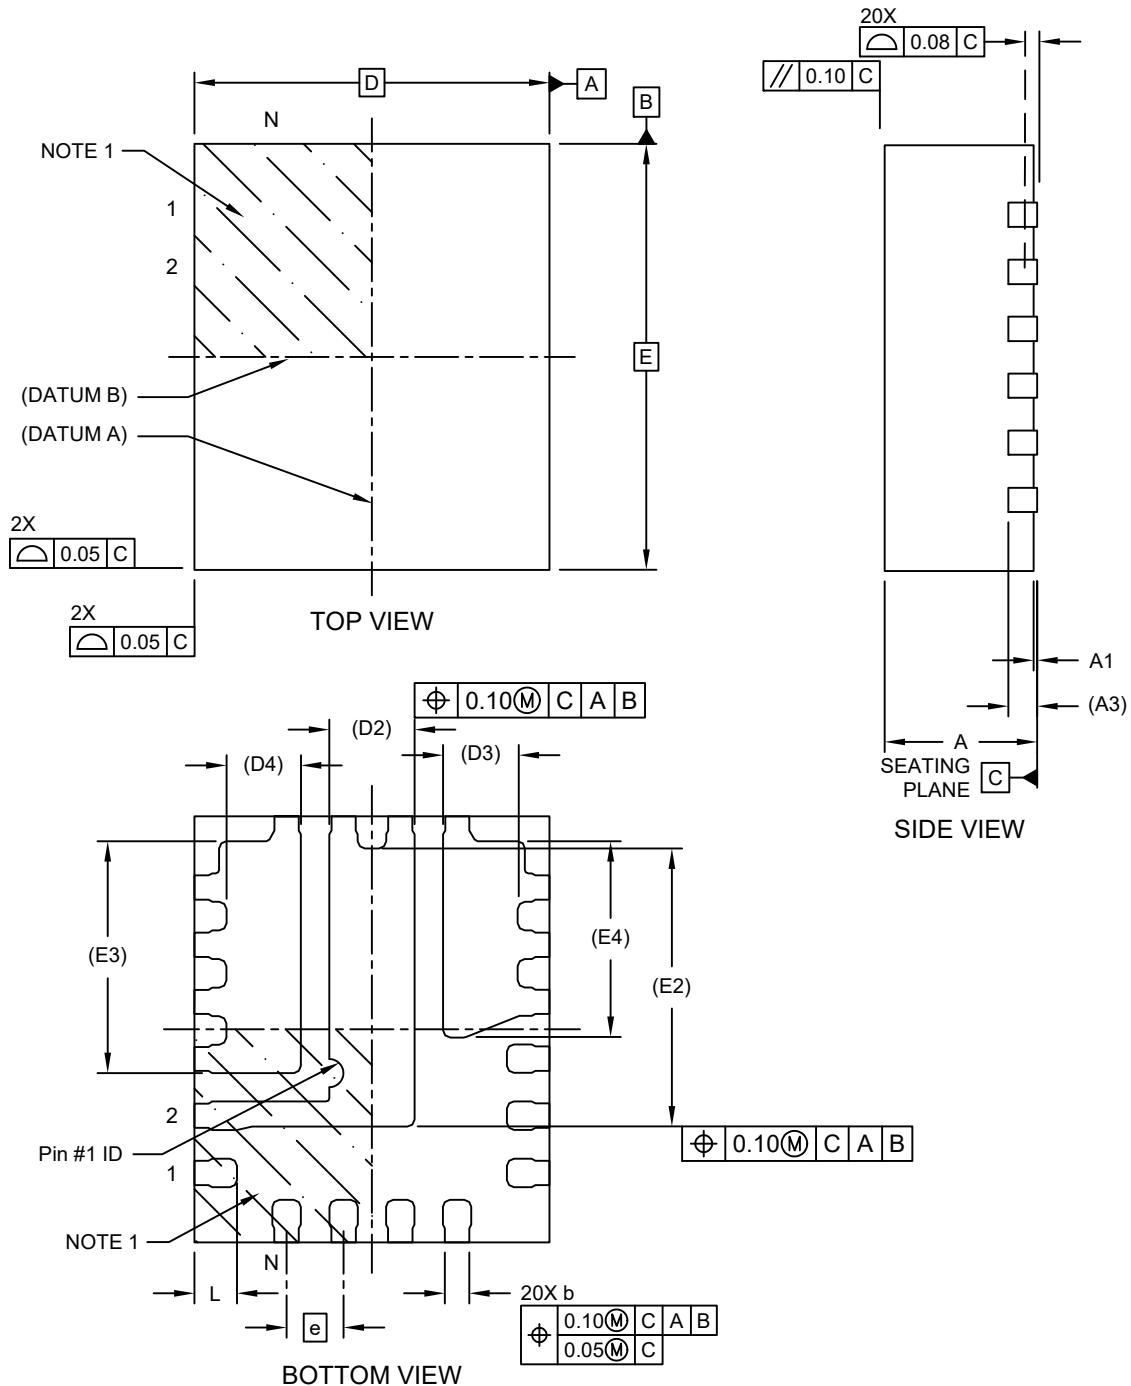

20-Lead Thin Plastic Quad Flat, No Lead Package (MAA) - 2.5x3 mm Body [TQFN] With Multiple Fused Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

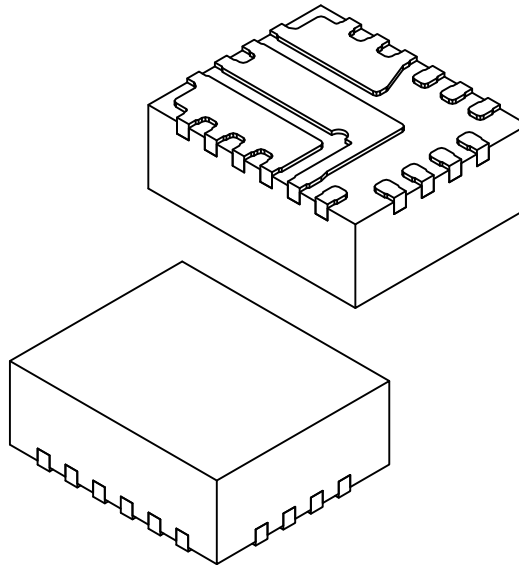


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	20		
Pitch	e	0.40 BSC		
Overall Height	A	1.10 REF		
Standoff	A1	0.00	0.20	0.50
Terminal Thickness	A3	0.203 REF		
Overall Length	D	2.50 BSC		
Exposed Pad Length	D2	0.60 REF		
Exposed Pad Length	D3	0.525 REF		
Exposed Pad Length	D4	0.525 REF		
Overall Width	E	3.00 BSC		
Exposed Pad Width	E2	1.95 REF		
Exposed Pad Width	E3	1.63 REF		
Exposed Pad Width	E4	1.37 REF		
Terminal Width	b	0.20 BSC		
Terminal Length	L	0.30 REF		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

20-Lead Thin Plastic Quad Flat, No Lead Package (MAA) - 2.5x3 mm Body [TQFN] With Multiple Fused Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

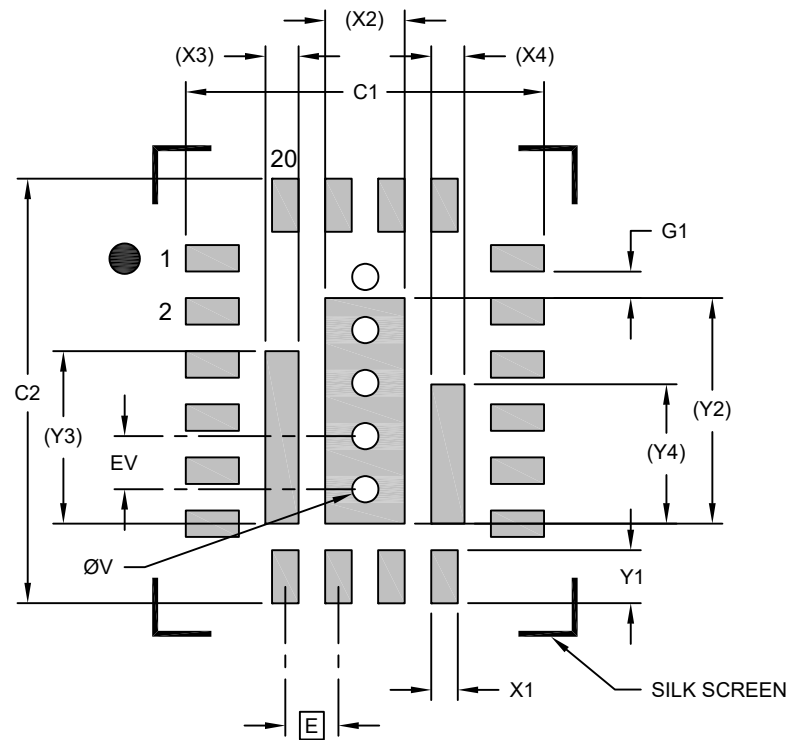

RECOMMENDED LAND PATTERN

Units		MILLIMETERS			Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX	Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.40 BSC			Exposed Pad Length	X2	0.20 BSC		
Contact Pad Spacing	C1		2.70		Exposed Pad Length	X3	0.25 REF		
Contact Pad Spacing	C2		3.20		Exposed Pad Length	X4	0.25 REF		
Contact Pad Width (X20)	X1		0.20		Exposed Pad Width	Y2	0.40 BSC		
Contact Pad Length (X20)	Y1		0.40		Exposed Pad Width	Y3	1.30 REF		
Contact Pad to Contact Pad (X18)	G1	0.20			Exposed Pad Width	Y4	1.05 REF		
Thermal Via Diameter	E		0.20						
Thermal Via Pitch	EV		0.40						

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3053 Rev A