



52-Lead Very Thick Plastic Quad Flat, No Lead (M3A) - 8x8x3 mm Body [B1QFN] Micrel Legacy Package H3QFN88-52LD-PL-1

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

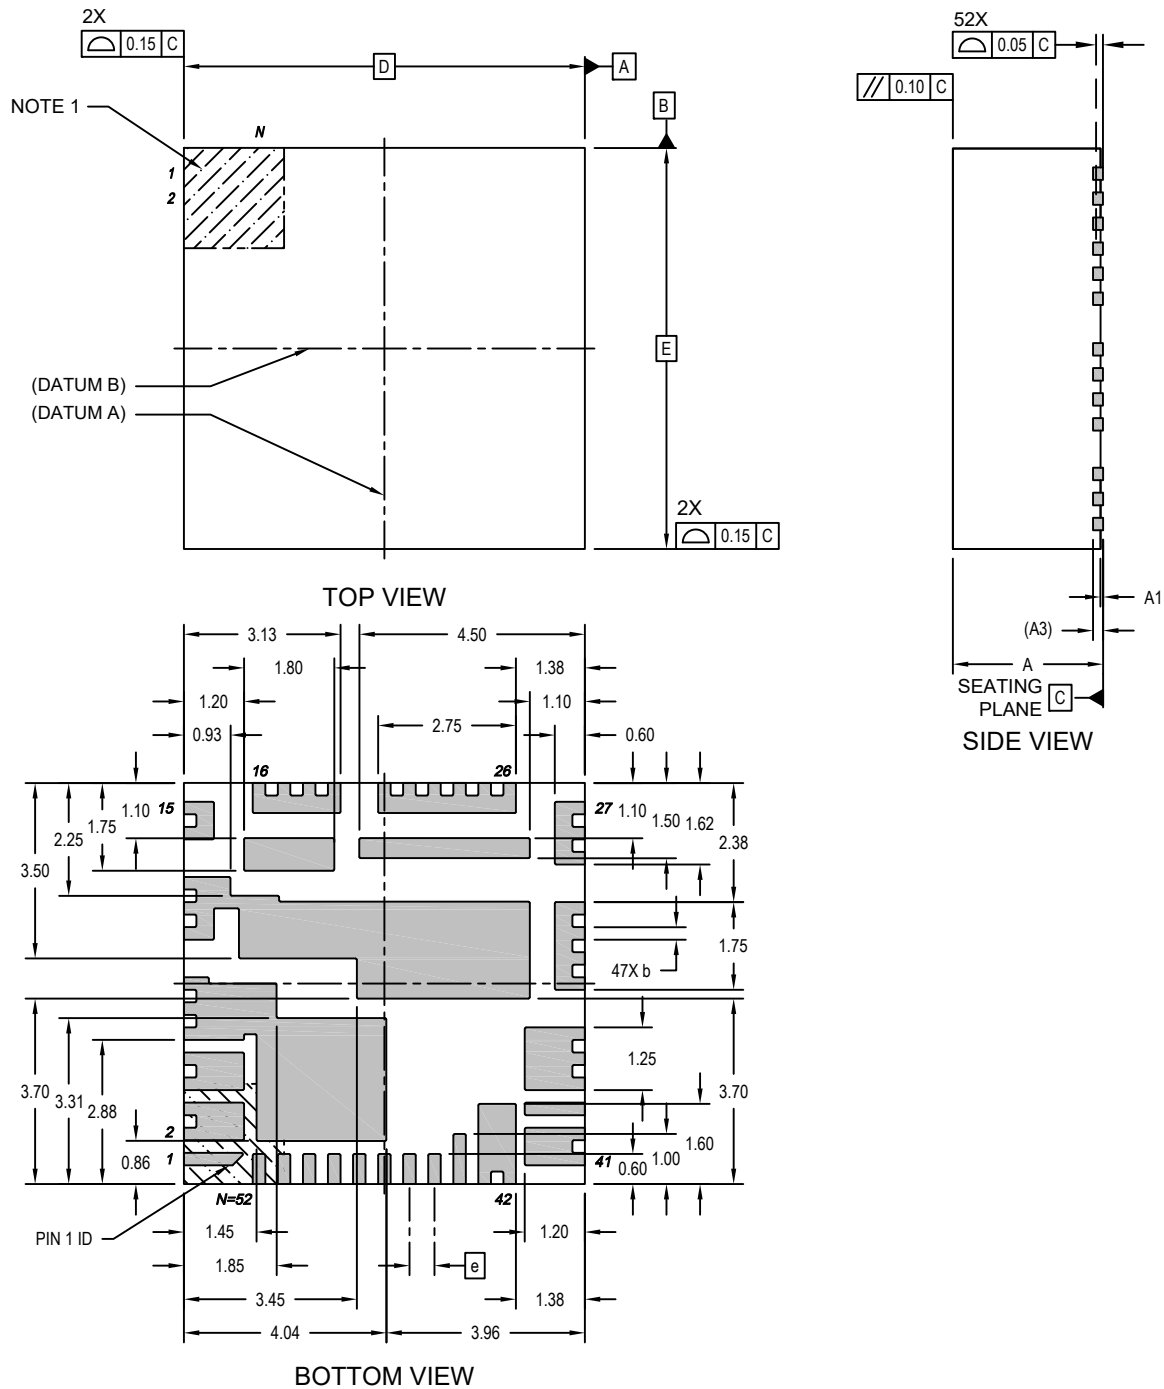

**52-Lead Very Thick Plastic Quad Flat, No Lead (M3A) - 8x8x3 mm Body [B1QFN]
Micrel Legacy Package H3QFN88-52LD-PL-1**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

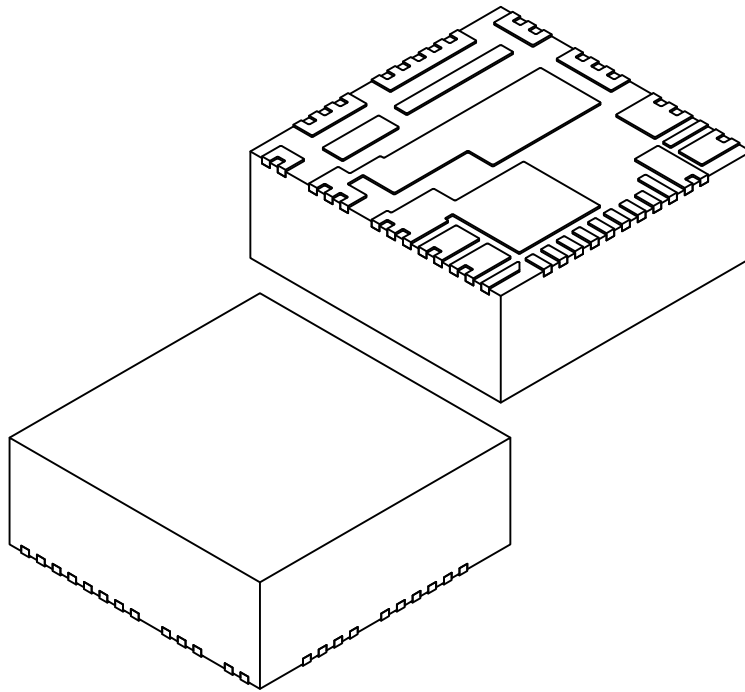



Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	52		
Pitch	e	0.50 BSC		
Overall Height	A	–	–	3.00
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.20 REF		
Overall Length	D	8.00 BSC		
Overall Width	E	8.00 BSC		
Terminal Width	b	0.20	0.25	0.30

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

52-Lead Very Thick Plastic Quad Flat, No Lead (M3A) - 8x8x3 mm Body [B1QFN] Micrel Legacy Package H3QFN88-52LD-PL-1

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

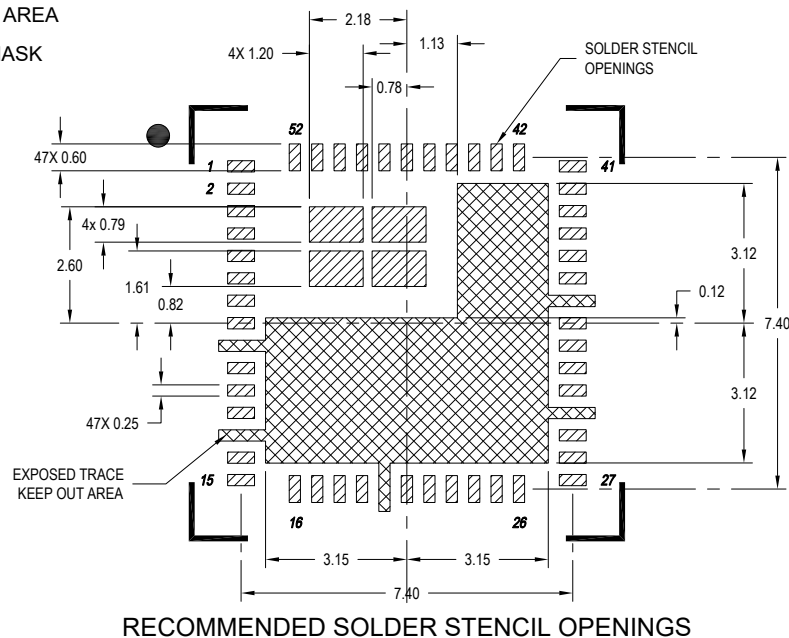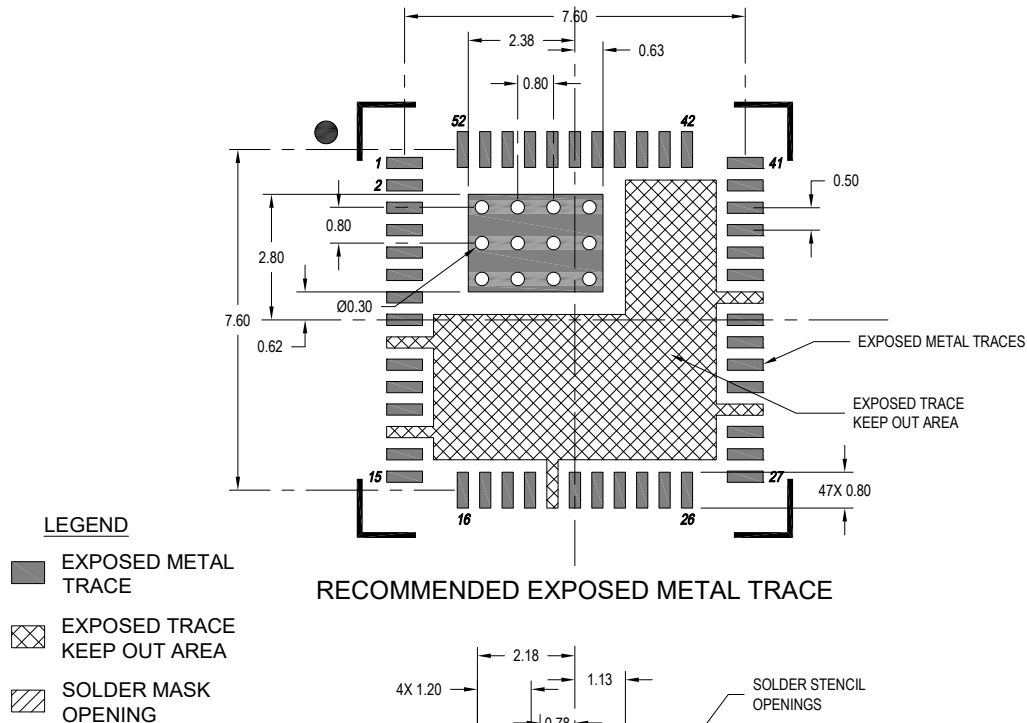


Notes:

1. BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3055-M3A Rev C


**52-Lead Very Thick Plastic Quad Flat, No Lead (M4A) - 8x8x3 mm Body [B1QFN]
Micrel Legacy Package H3QFN88-52LD-PL-1**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

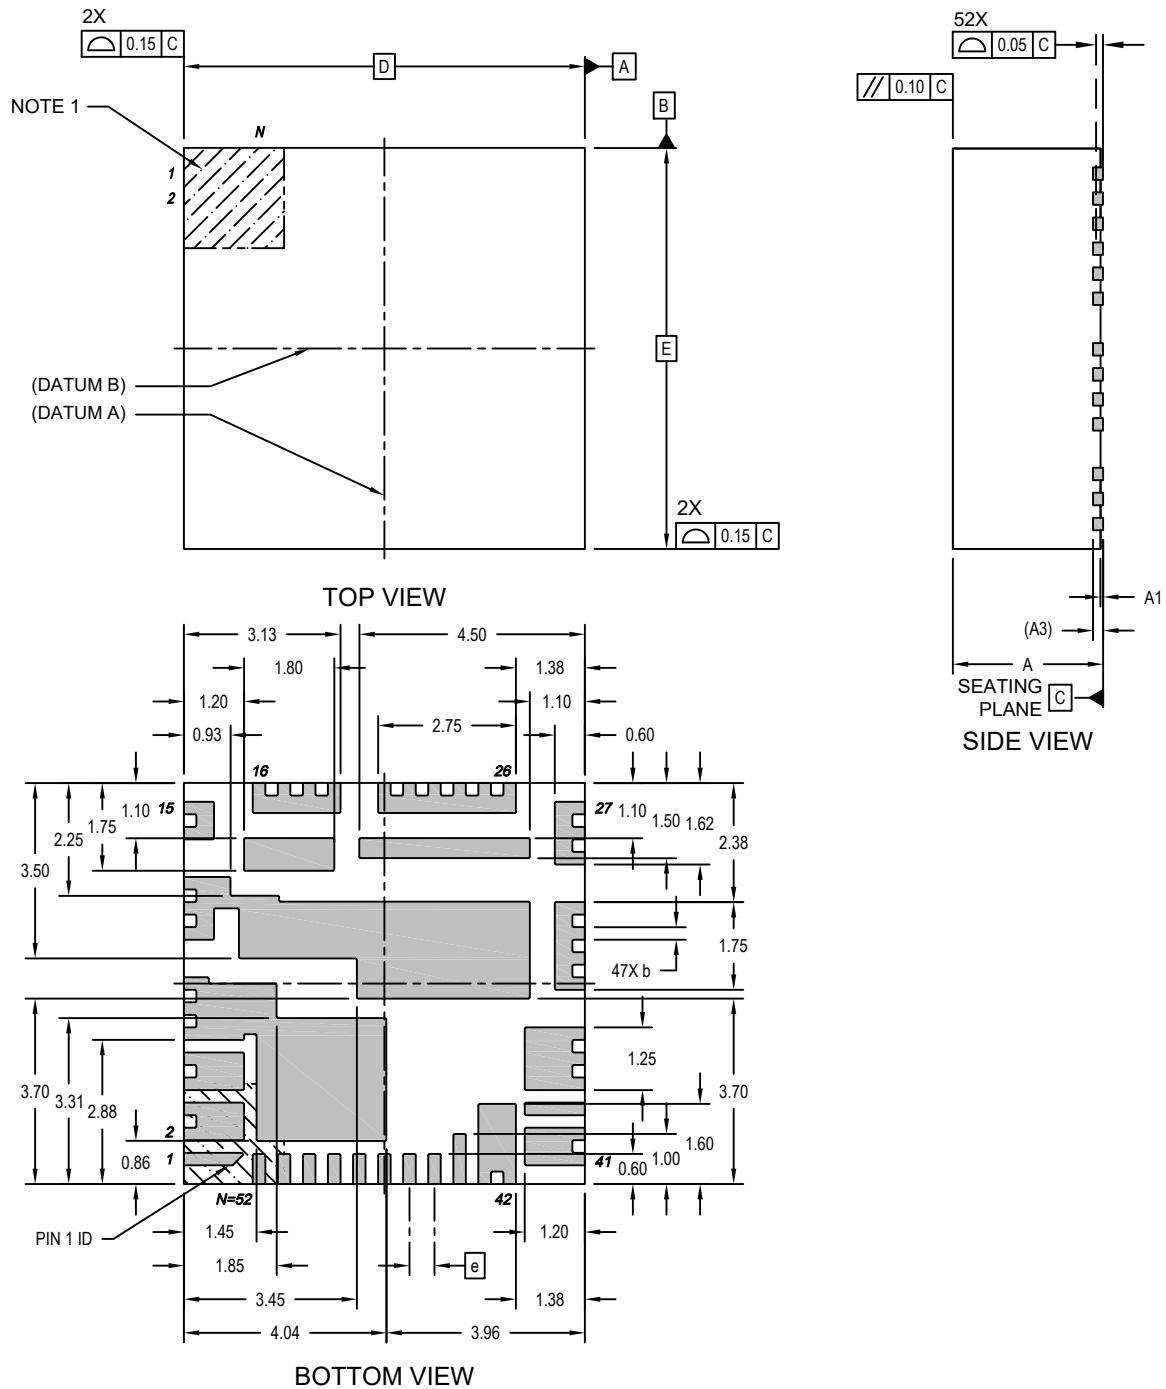

**52-Lead Very Thick Plastic Quad Flat, No Lead (M4A) - 8x8x3 mm Body [B1QFN]
Micrel Legacy Package H3QFN88-52LD-PL-1**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

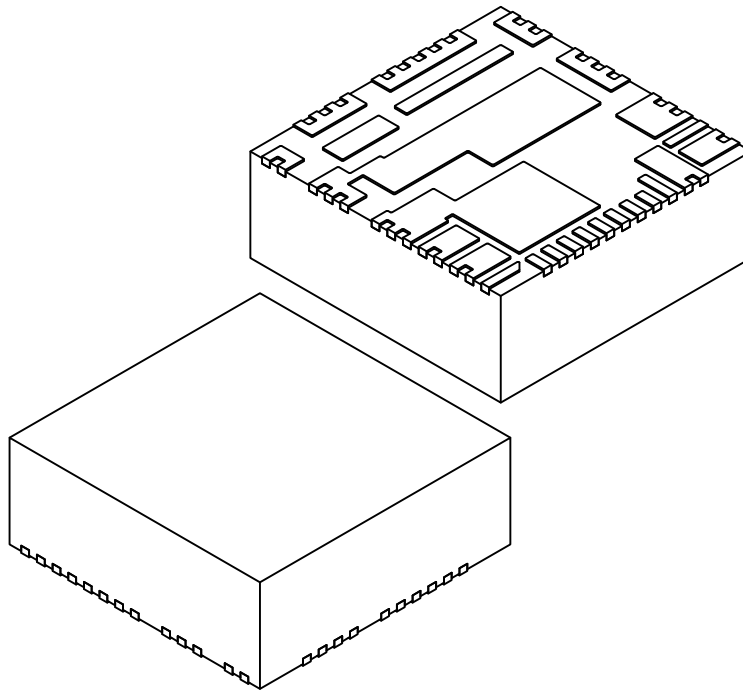



Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	52		
Pitch	e	0.50 BSC		
Overall Height	A	–	–	3.00
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.20 REF		
Overall Length	D	8.00 BSC		
Overall Width	E	8.00 BSC		
Terminal Width	b	0.20	0.25	0.30

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

52-Lead Very Thick Plastic Quad Flat, No Lead (M4A) - 8x8x3 mm Body [B1QFN] **Micrel Legacy Package H3QFN88-52LD-PL-1**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

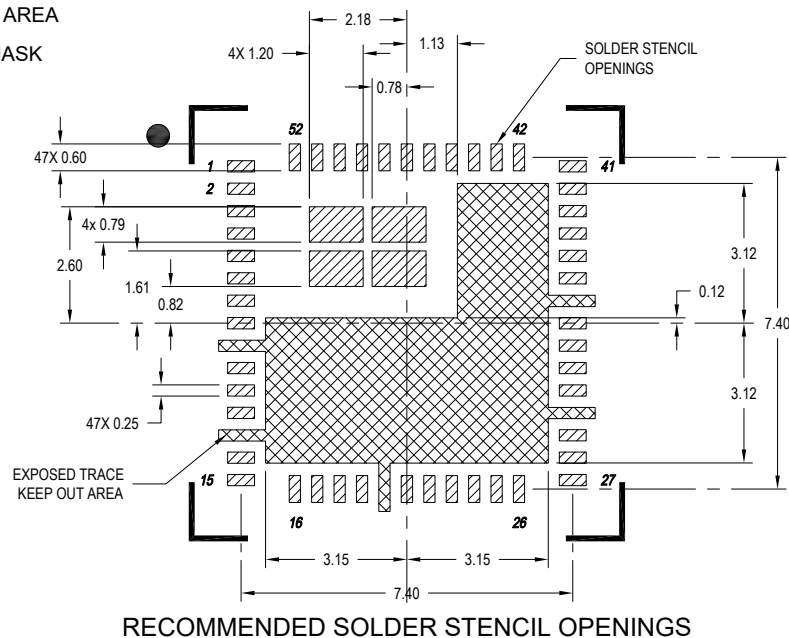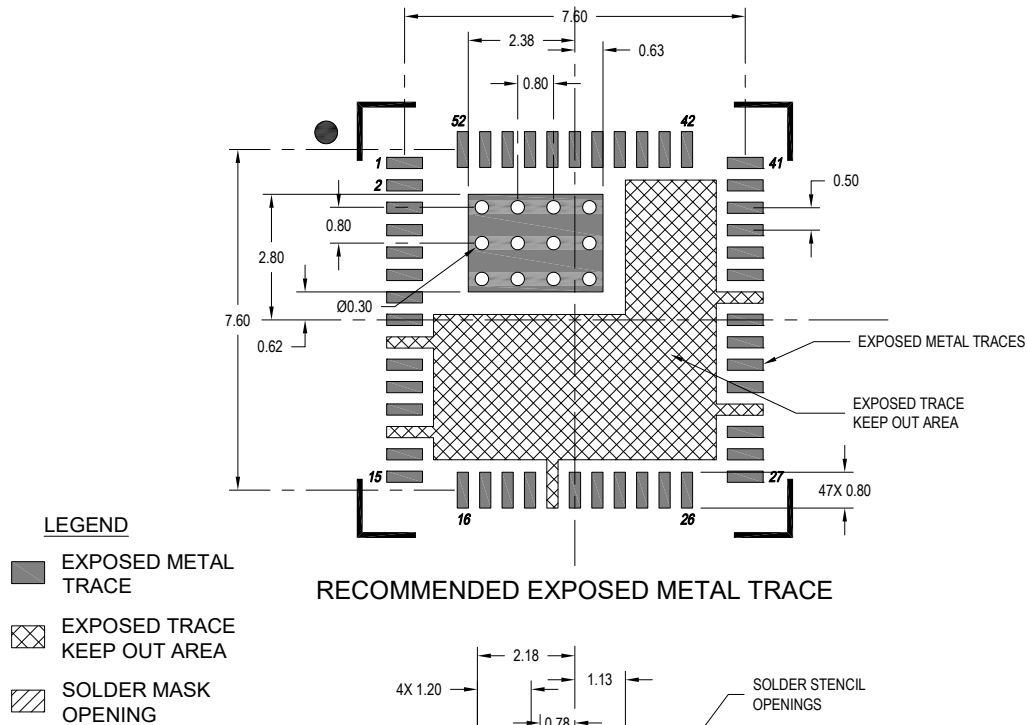


Notes:

1. BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3055-M4A Rev C


**52-Lead Very Thick Plastic Quad Flat, No Lead (M5A) - 8x8x3 mm Body [B1QFN]
Micrel Legacy Package H3QFN88-52LD-PL-1**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

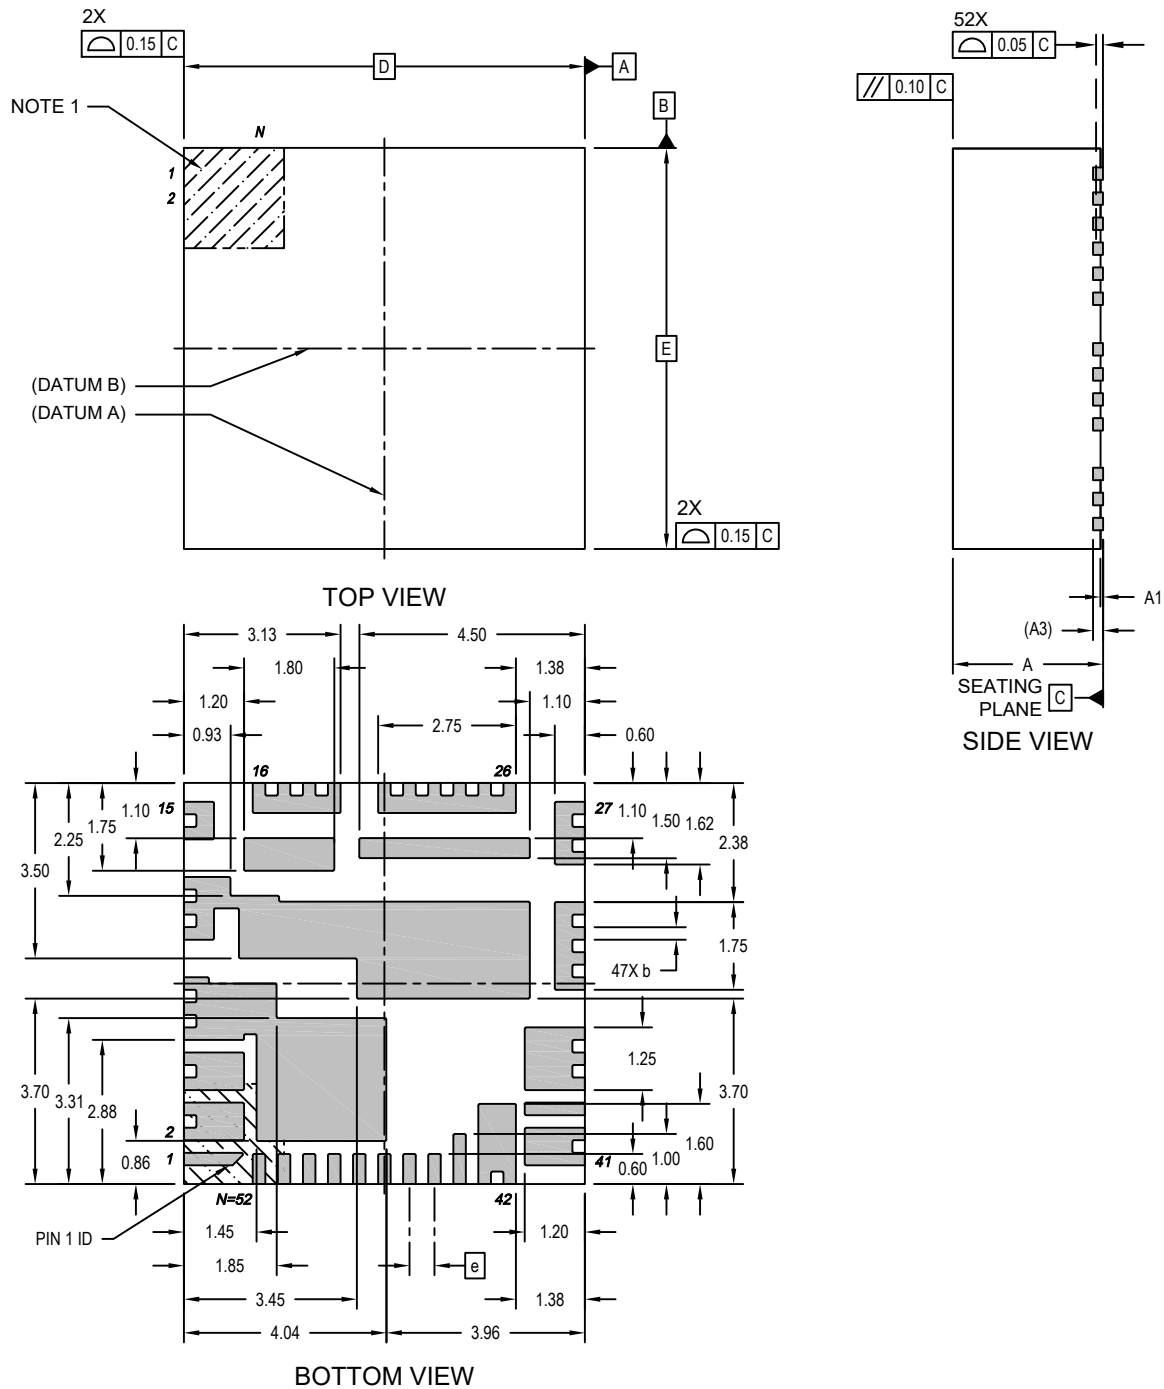

**52-Lead Very Thick Plastic Quad Flat, No Lead (M5A) - 8x8x3 mm Body [B1QFN]
Micrel Legacy Package H3QFN88-52LD-PL-1**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

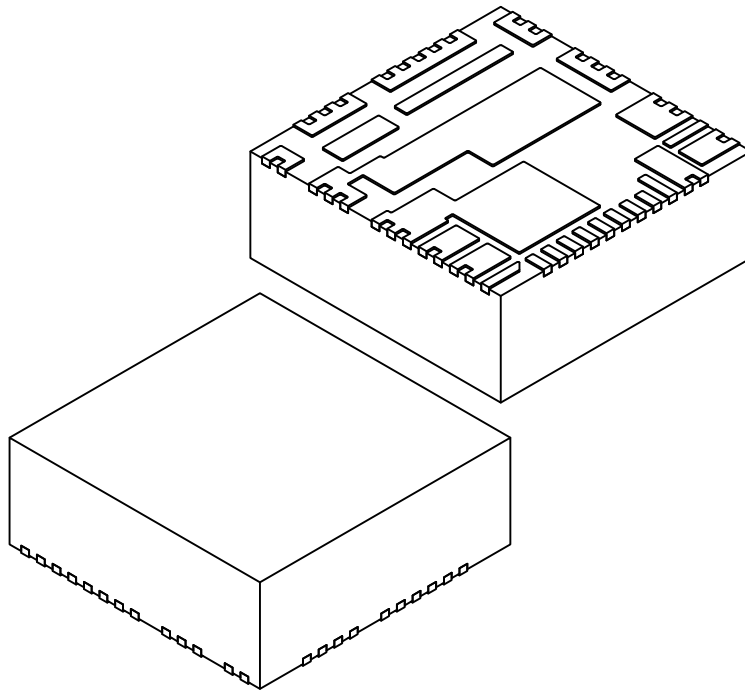



Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	52		
Pitch	e	0.50 BSC		
Overall Height	A	–	–	3.00
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.20 REF		
Overall Length	D	8.00 BSC		
Overall Width	E	8.00 BSC		
Terminal Width	b	0.20	0.25	0.30

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

52-Lead Very Thick Plastic Quad Flat, No Lead (M5A) - 8x8x3 mm Body [B1QFN] Micrel Legacy Package H3QFN88-52LD-PL-1

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

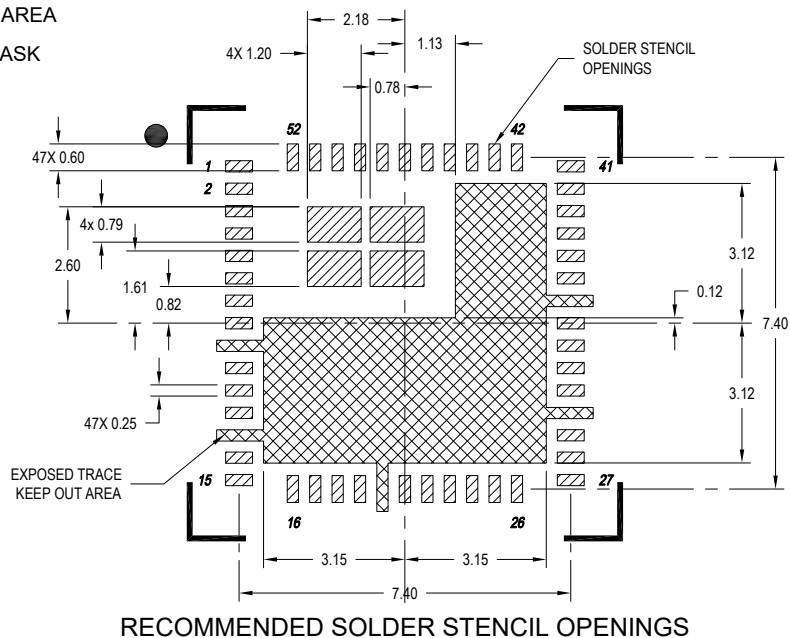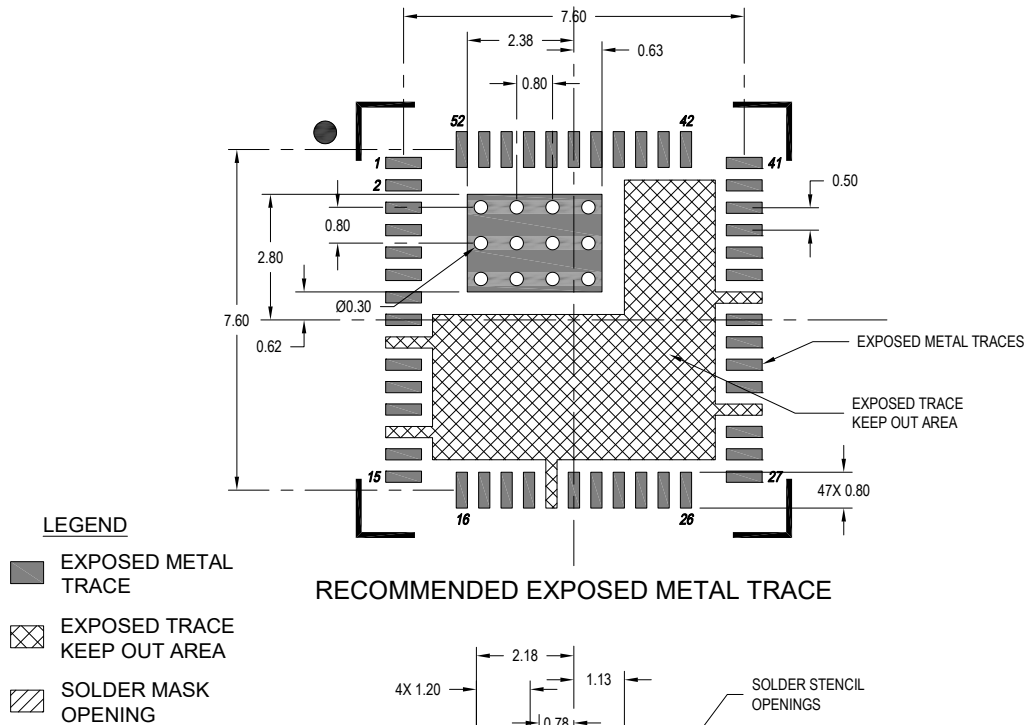

Notes:

1. BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3055-M5A Rev C