



**64-Lead Extra Thick Quad Flat, No Lead Package (M7A) - 12x12 mm Body [B2QFN]
Micrel Legacy Package H4QFN1212-64LD-PL-1**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

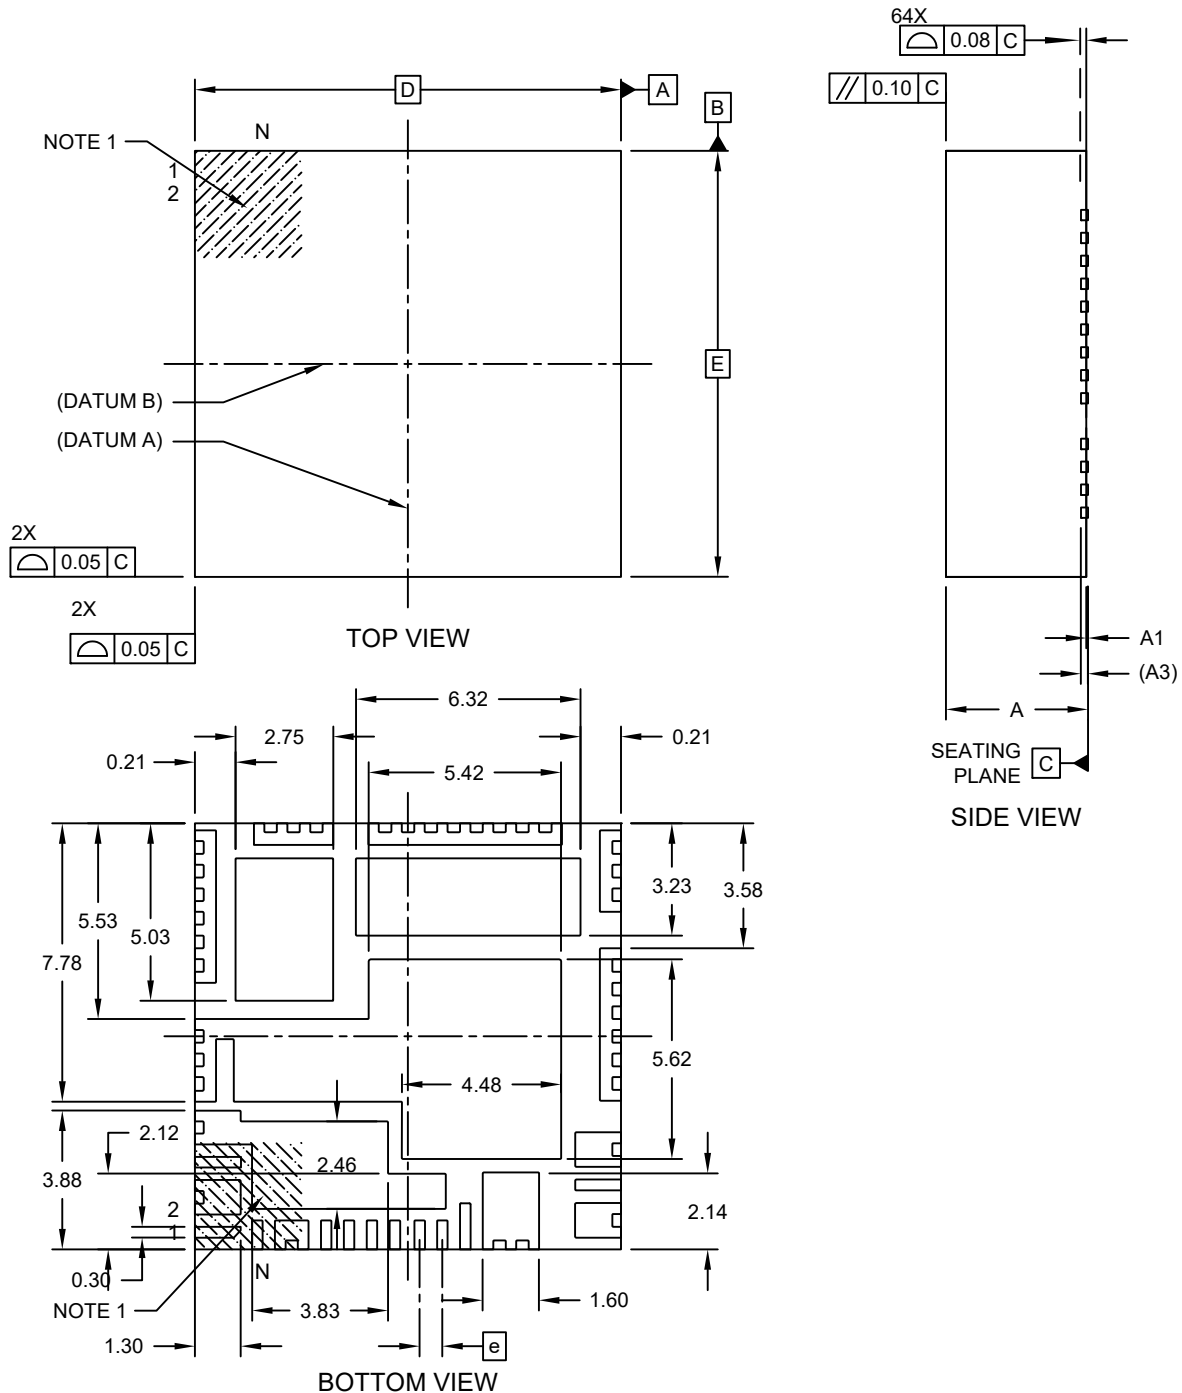

**64-Lead Extra Thick Quad Flat, No Lead Package (M7A) - 12x12 mm Body [B2QFN]
Micrel Legacy Package H4QFN1212-64LD-PL-1**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

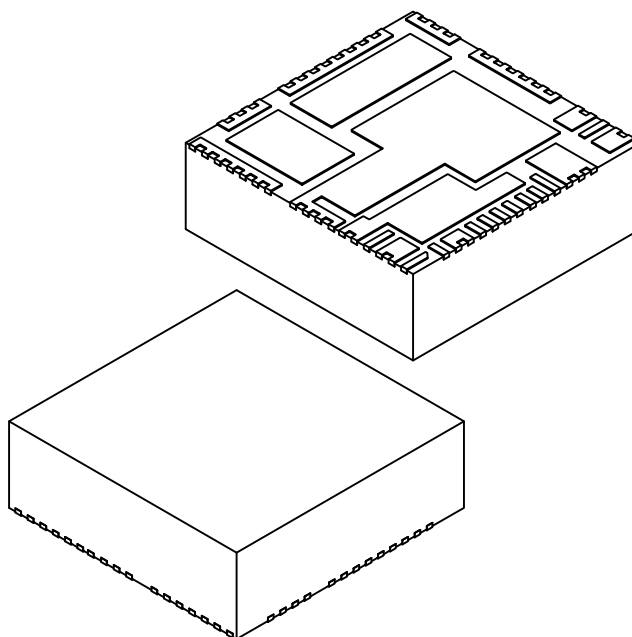


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	64		
Pitch	e	0.65 BSC		
Overall Height	A		4.00 BSC	
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.20 REF		
Overall Length	D	12.00 BSC		
Overall Width	E	12.00 BSC		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

**64-Lead Extra Thick Quad Flat, No Lead Package (M7A) - 12x12 mm Body [B2QFN]
Micrel Legacy Package H4QFN1212-64LD-PL-1**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/package3>

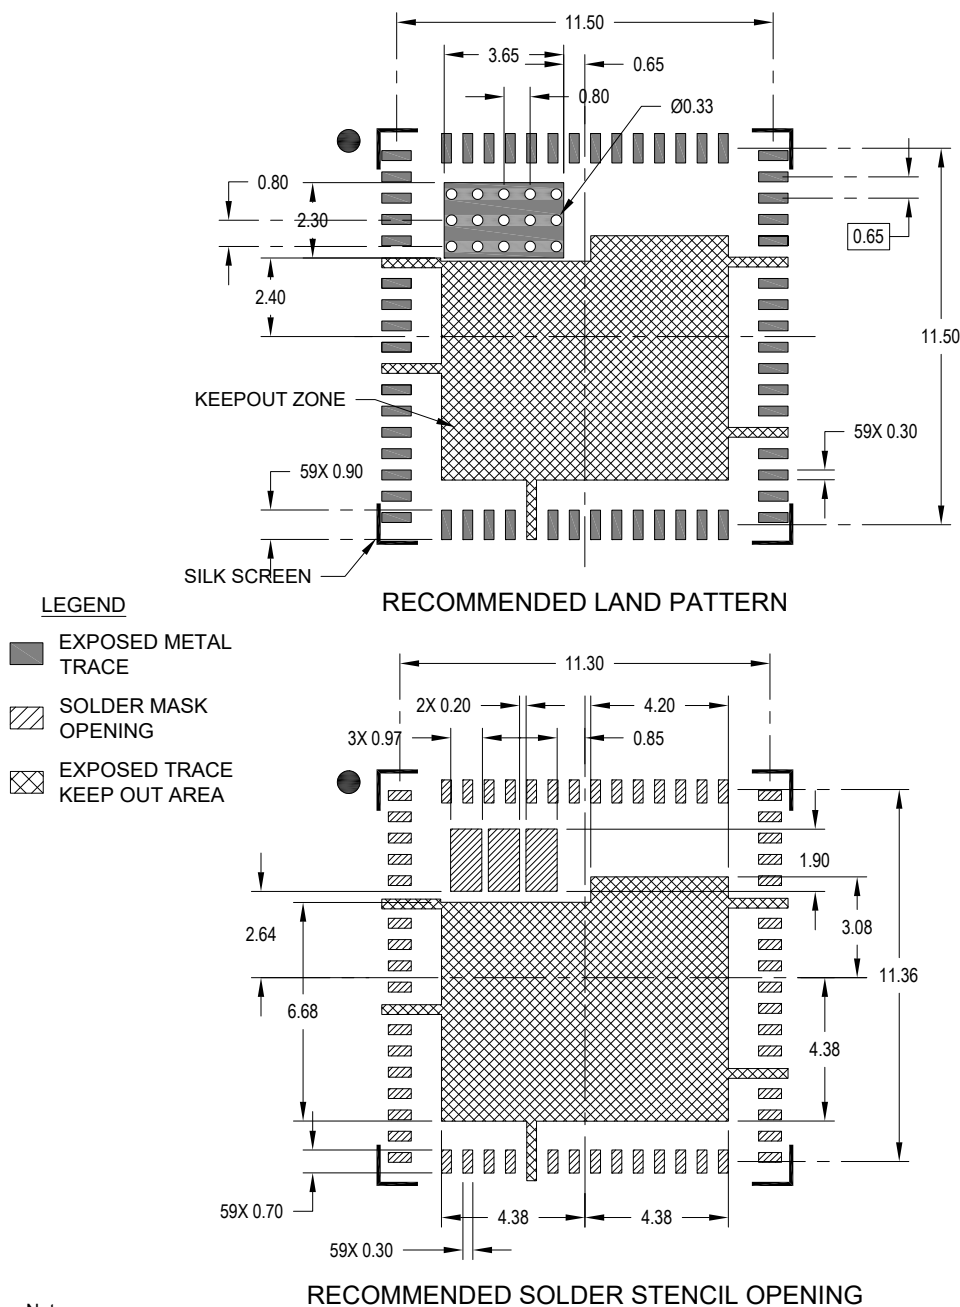

- Notes:
1. BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process