



14-Lead Thin Plastic Dual Flat, No Lead Package (HAA) - 3.5x3 mm Body [TDFN] With 1.33x1.80 Exposed Pad and Fused Terminals

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

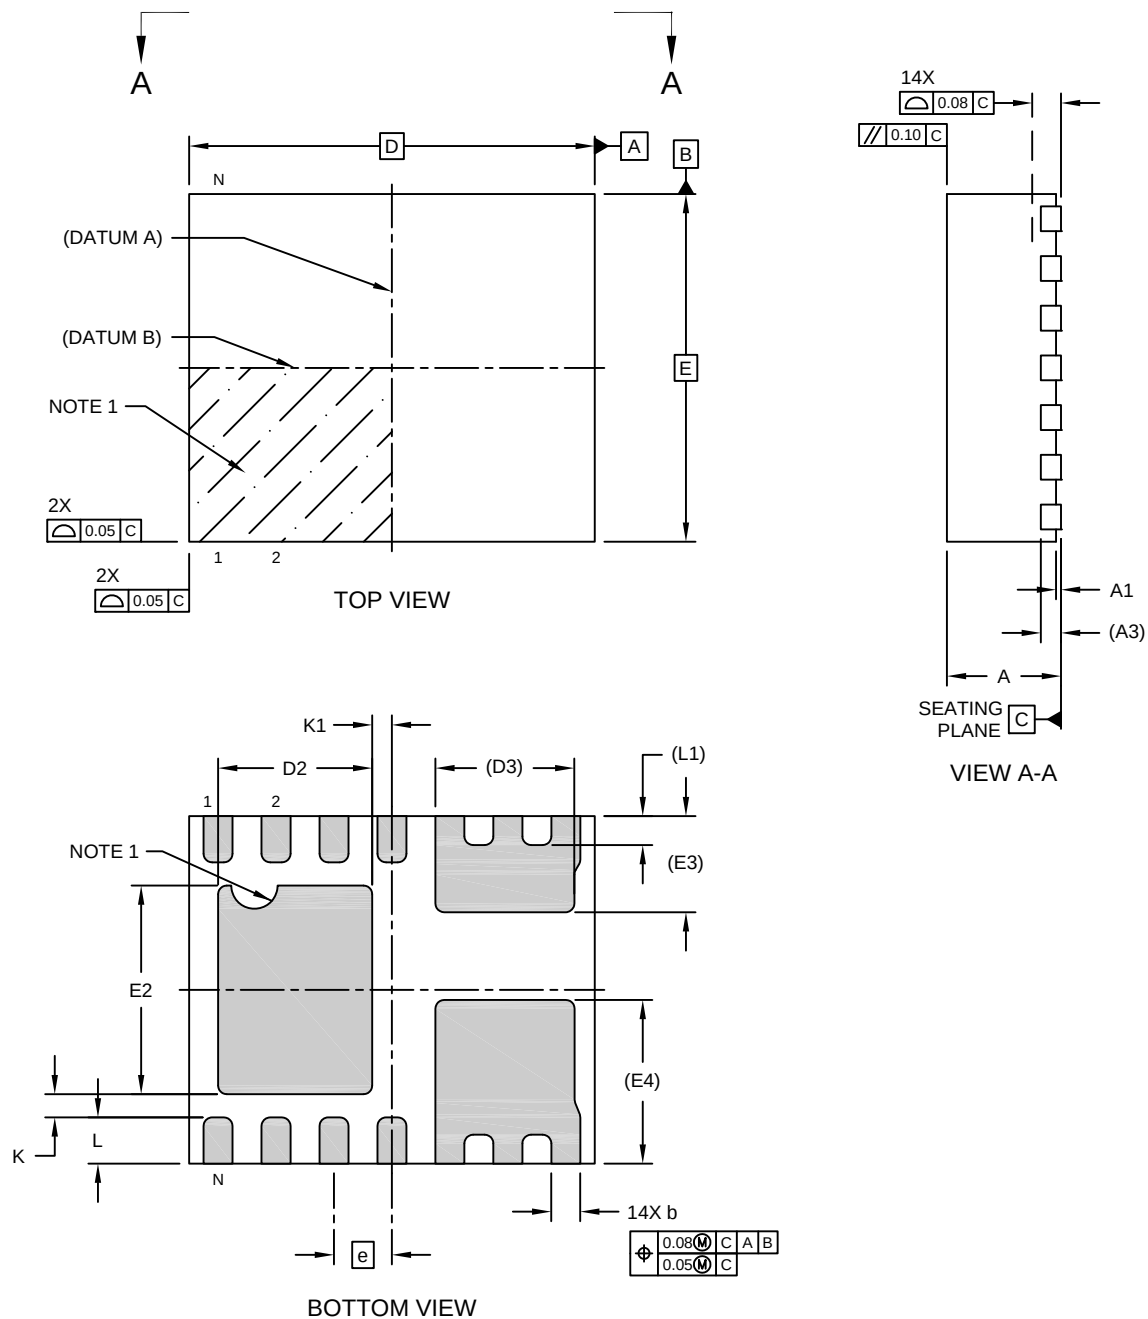

14-Lead Thin Plastic Dual Flat, No Lead Package (HAA) - 3.5x3 mm Body [TDFN] With 1.33x1.80 Exposed Pad and Fused Terminals

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

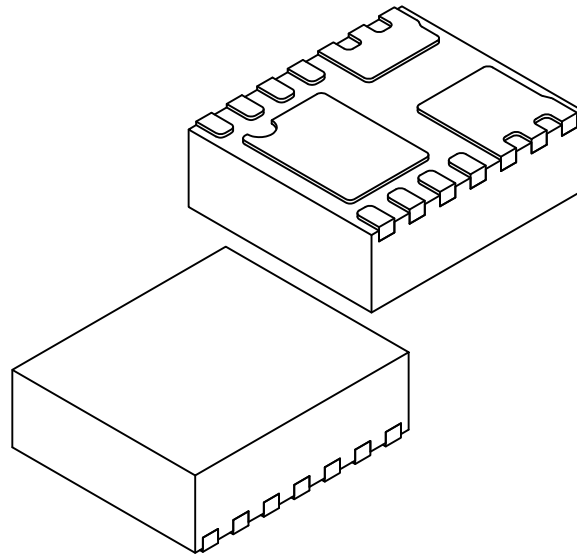


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		14		
Pitch	e		0.50 BSC		
Overall Height	A		1.05	1.10	1.15
Standoff	A1		0.00	0.02	0.05
Terminal Thickness	A3		0.203 REF		
Overall Length	D		3.50 BSC		
Exposed Pad Length	D2		1.28	1.33	1.38
Exposed Pad Length	D3		1.20 REF		
Overall Width	E		3.00 BSC		
Exposed Pad Width	E2		1.75	1.80	1.85
Exposed Pad Width	E3		0.83 REF		
Exposed Pad Width	E4		1.42 REF		
Terminal Width	b		0.20	0.25	0.30
Terminal Length	L		0.35	0.40	0.45
Terminal Length	L1		0.25 REF		
Terminal-to-Exposed-Pad	K		0.20	-	-
Package Center to Exposed-Pad	K1		0.12	0.17	0.22

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

14-Lead Thin Plastic Dual Flat, No Lead Package (HAA) - 3.5x3 mm Body [TDFN] With 1.33x1.80 Exposed Pad and Fused Terminals

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

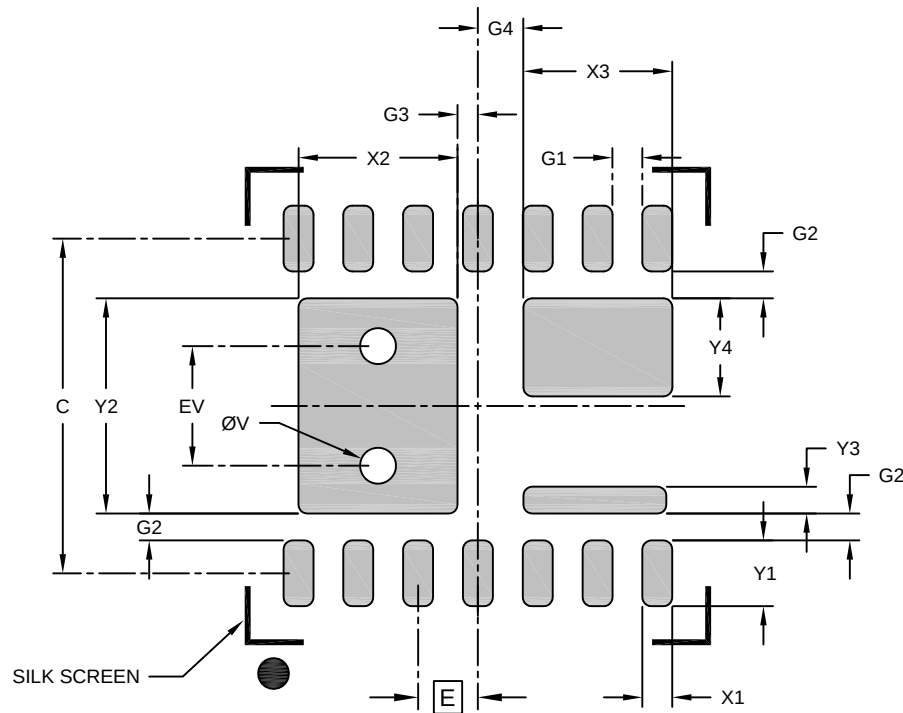

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Exposed Pad Width	X2			1.33
Exposed Pad Width	X3			1.25
Exposed Pad Length	Y2			1.80
Exposed Pad Length	Y3			0.22
Exposed Pad Length	Y4			0.82
Contact Pad Spacing	C		2.80	
Contact Pad Width (Xnn)	X1			0.25
Contact Pad Length (Xnn)	Y1			0.55
Contact Pad to Contact Pad	G1	0.25		
Contact Pad to Exposed Pad	G2	0.23		
Package Center to Exposed Pad	G3	0.17		
Package Center to Exposed Pad	G4	0.38		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process