
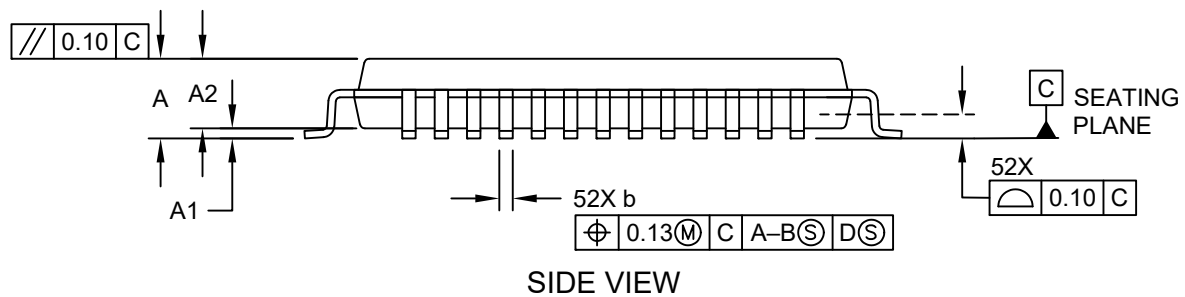



52-Lead Plastic Low Profile Quad Flat Pack (CDA) - 10x10x1.4 mm Body [LQFP] Micrel Legacy Package LQFP10x10-52L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

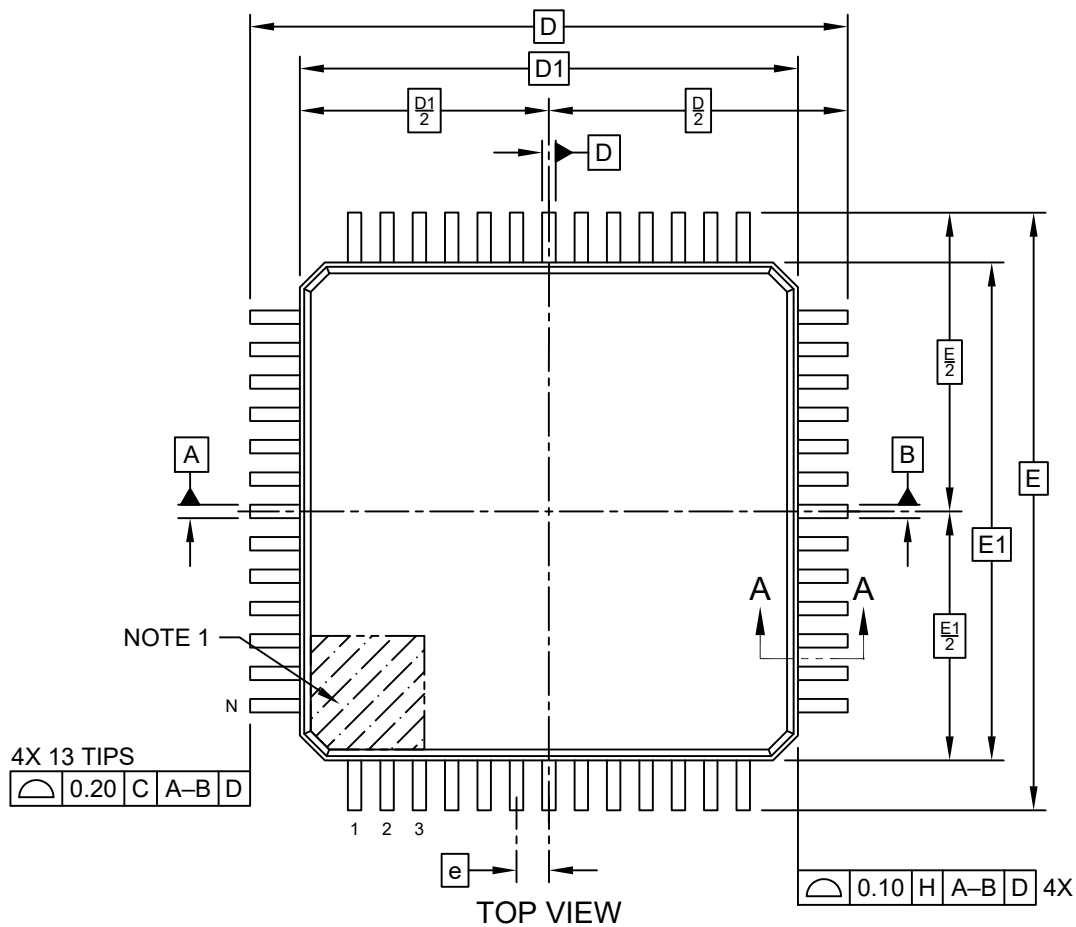

52-Lead Plastic Low Profile Quad Flat Pack (CDA) - 10x10x1.4 mm Body [LQFP] Micrel Legacy Package LQFP10x10-52L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

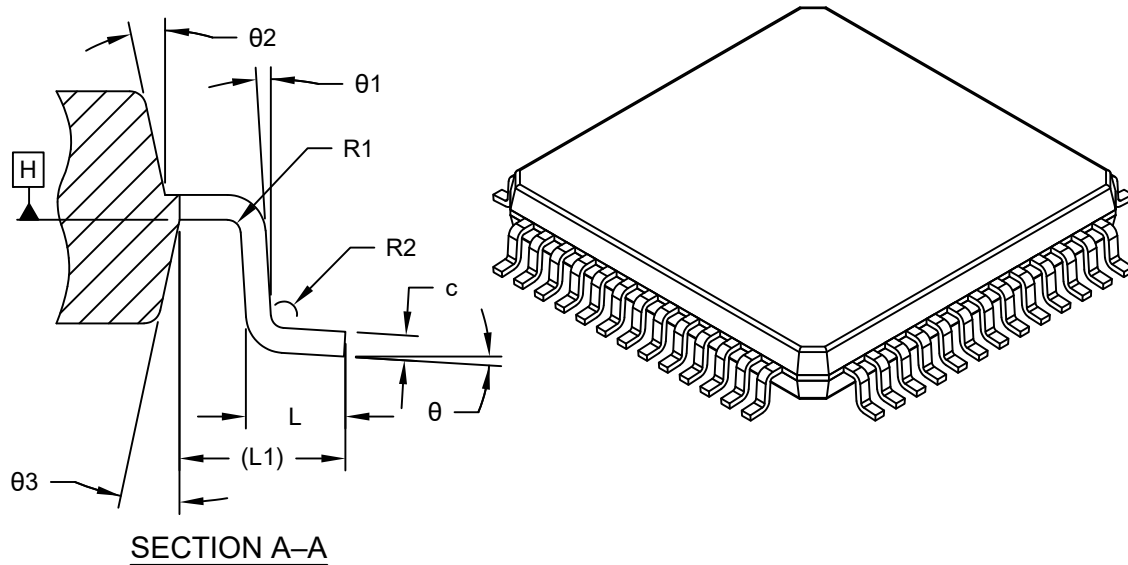


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		52		
Pitch	e		0.65 BSC		
Overall Height	A		–	–	1.60
Standoff	A1		0.05	–	0.15
Terminal Thickness	A2		1.35	1.40	1.45
Overall Length	D		12.00 BSC		
Exposed Pad Length	D1		10.00 BSC		
Overall Width	E		12.00 BSC		
Exposed Pad Width	E1		10.00 BSC		
Terminal Width	b		0.22	0.32	0.38
Terminal Thickness	c		0.09	–	0.20
Terminal Length	L		0.45	0.60	0.75
Terminal Length	L1		1.00 REF		
Lead Bend Radius	R1		0.08	–	–
Foot Angle	R2		0.08	–	0.20
Foot Angle	θ		0°	3.5°	7°
Lead Angle	θ1		0°	–	–
Mold Draft Angle	θ2		11°	12°	13°
Mold Draft Angle	θ3		11°	12°	13°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

52-Lead Plastic Low Profile Quad Flat Pack (CDA) - 10x10x1.4 mm Body [LQFP] Micrel Legacy Package LQFP10x10-52L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

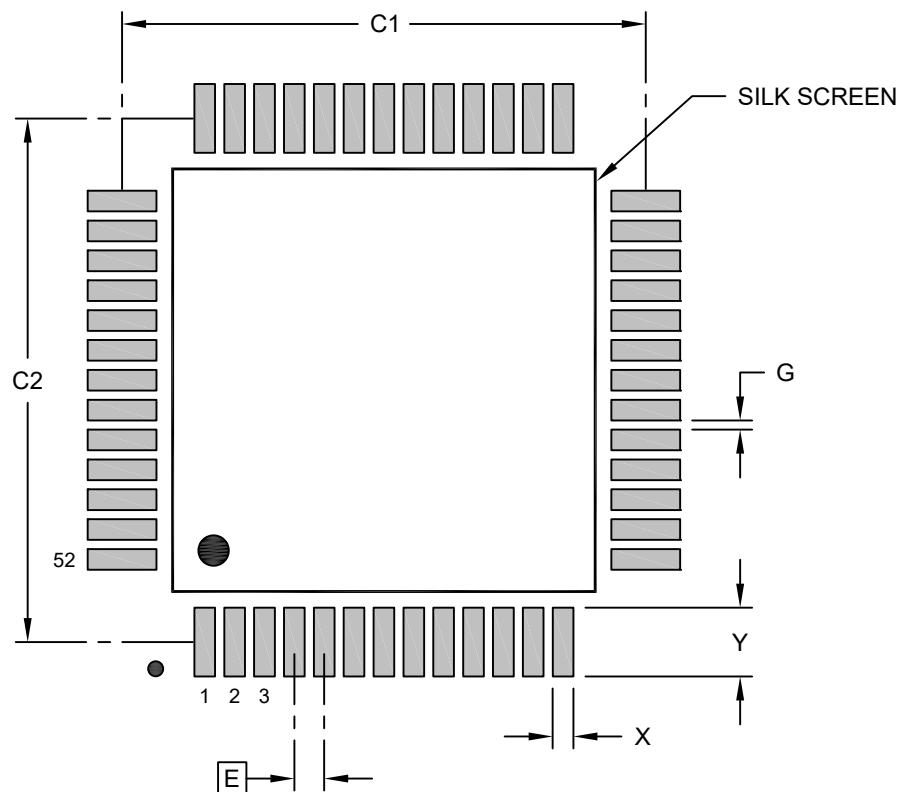

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Spacing	C1		11.40	
Contact Pad Spacing	C2		11.40	
Contact Pad Width (X52)	X			0.45
Contact Pad Length (X52)	Y			1.50
Contact Pad to Contact Pad (X48)	G	0.20		

Notes:



1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-3073-CDA Rev A


52-Lead Plastic Low Profile Quad Flat Pack (C4A) - 10x10x1.4 mm Body [LQFP] Micrel Legacy Package LQFP10x10-52L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

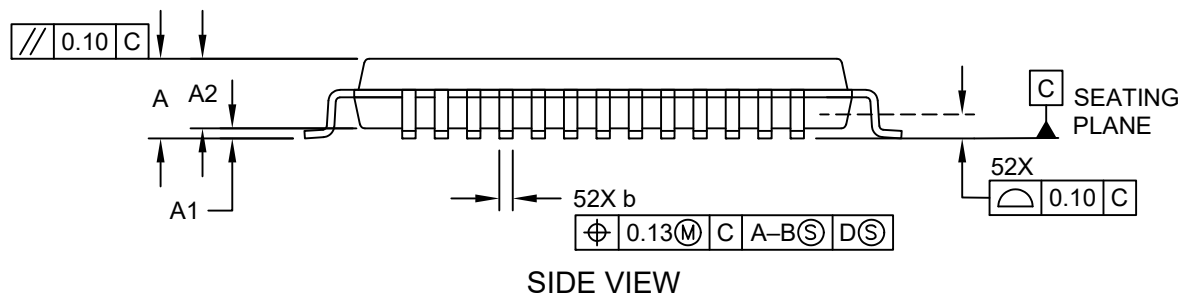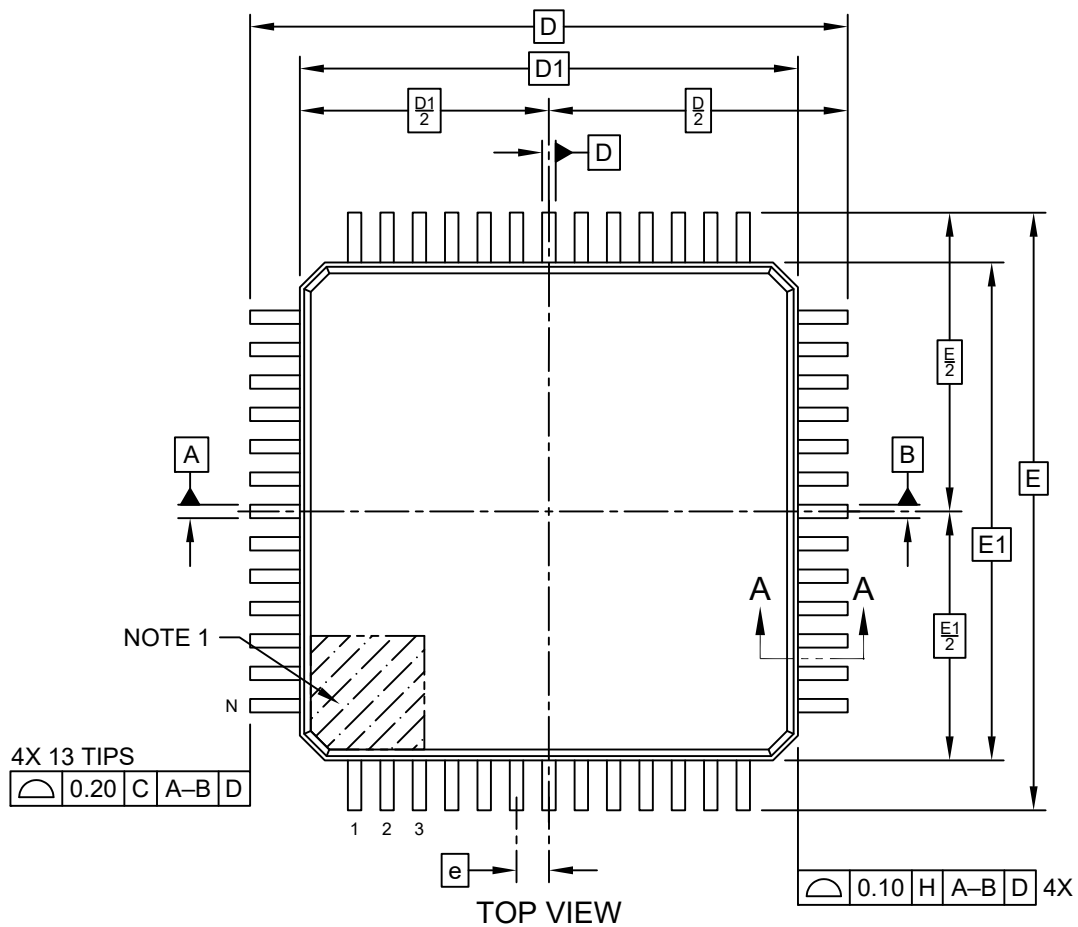

**52-Lead Plastic Low Profile Quad Flat Pack (C4A) - 10x10x1.4 mm Body [LQFP]
Micrel Legacy Package LQFP10x10-52L**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

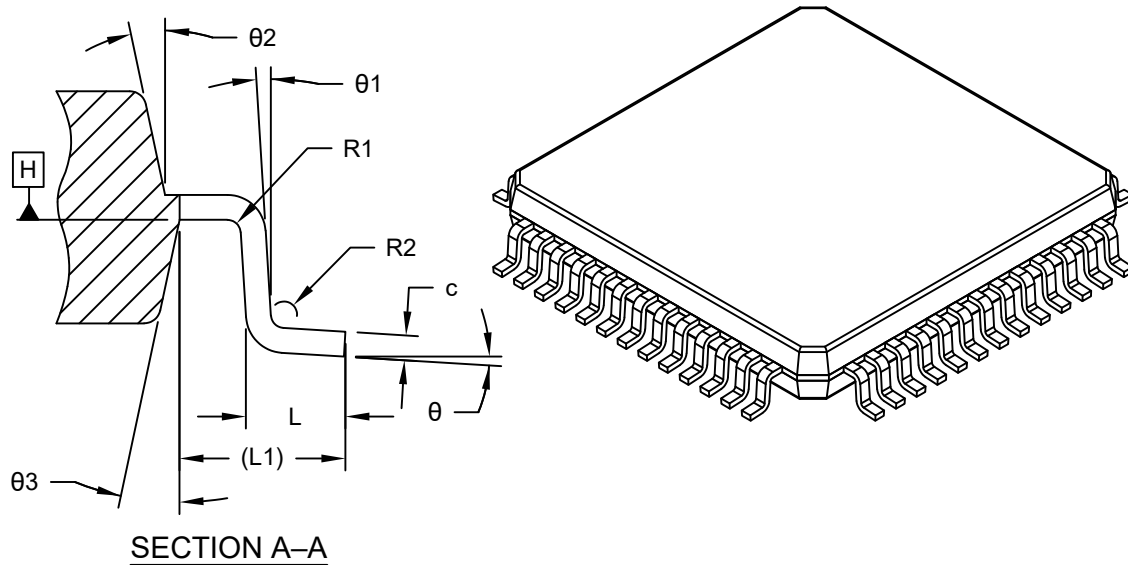


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		52		
Pitch	e		0.65 BSC		
Overall Height	A		—	—	1.60
Standoff	A1		0.00	—	0.15
Terminal Thickness	A2		1.35	1.40	1.45
Overall Length	D		12.00 BSC		
Exposed Pad Length	D1		10.00 BSC		
Overall Width	E		12.00 BSC		
Exposed Pad Width	E1		10.00 BSC		
Terminal Width	b		0.22	0.32	0.38
Terminal Thickness	c		0.09	—	0.20
Terminal Length	L		0.45	0.60	0.75
Terminal Length	L1		1.00 REF		
Lead Bend Radius	R1		0.08	—	—
Foot Angle	R2		0.08	—	0.20
Foot Angle	θ		0°	3.5°	7°
Lead Angle	θ1		0°	—	—
Mold Draft Angle	θ2		11°	12°	13°
Mold Draft Angle	θ3		11°	12°	13°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

52-Lead Plastic Low Profile Quad Flat Pack (C4A) - 10x10x1.4 mm Body [LQFP] Micrel Legacy Package LQFP10x10-52L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

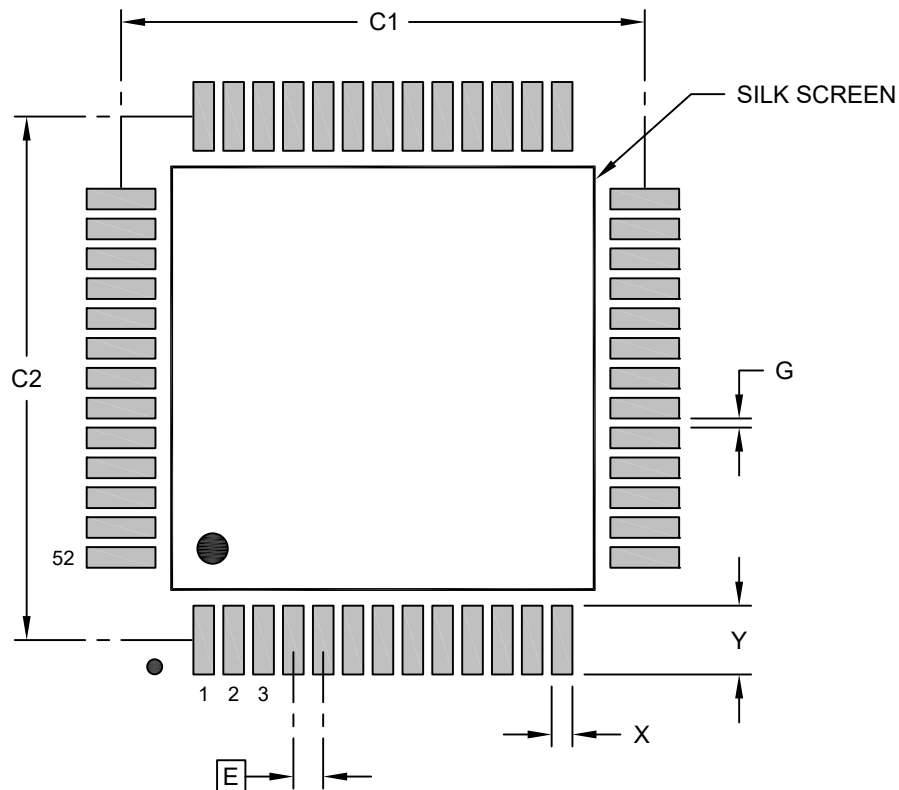

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Spacing	C1		11.40	
Contact Pad Spacing	C2		11.40	
Contact Pad Width (X52)	X			0.45
Contact Pad Length (X52)	Y			1.50
Contact Pad to Contact Pad (X48)	G	0.20		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-3073-C4A Rev A