



80-Lead Plastic Low Profile Quad Flat Pack (CGA) - 10x10x1.4 mm Body [LQFP] Micrel Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

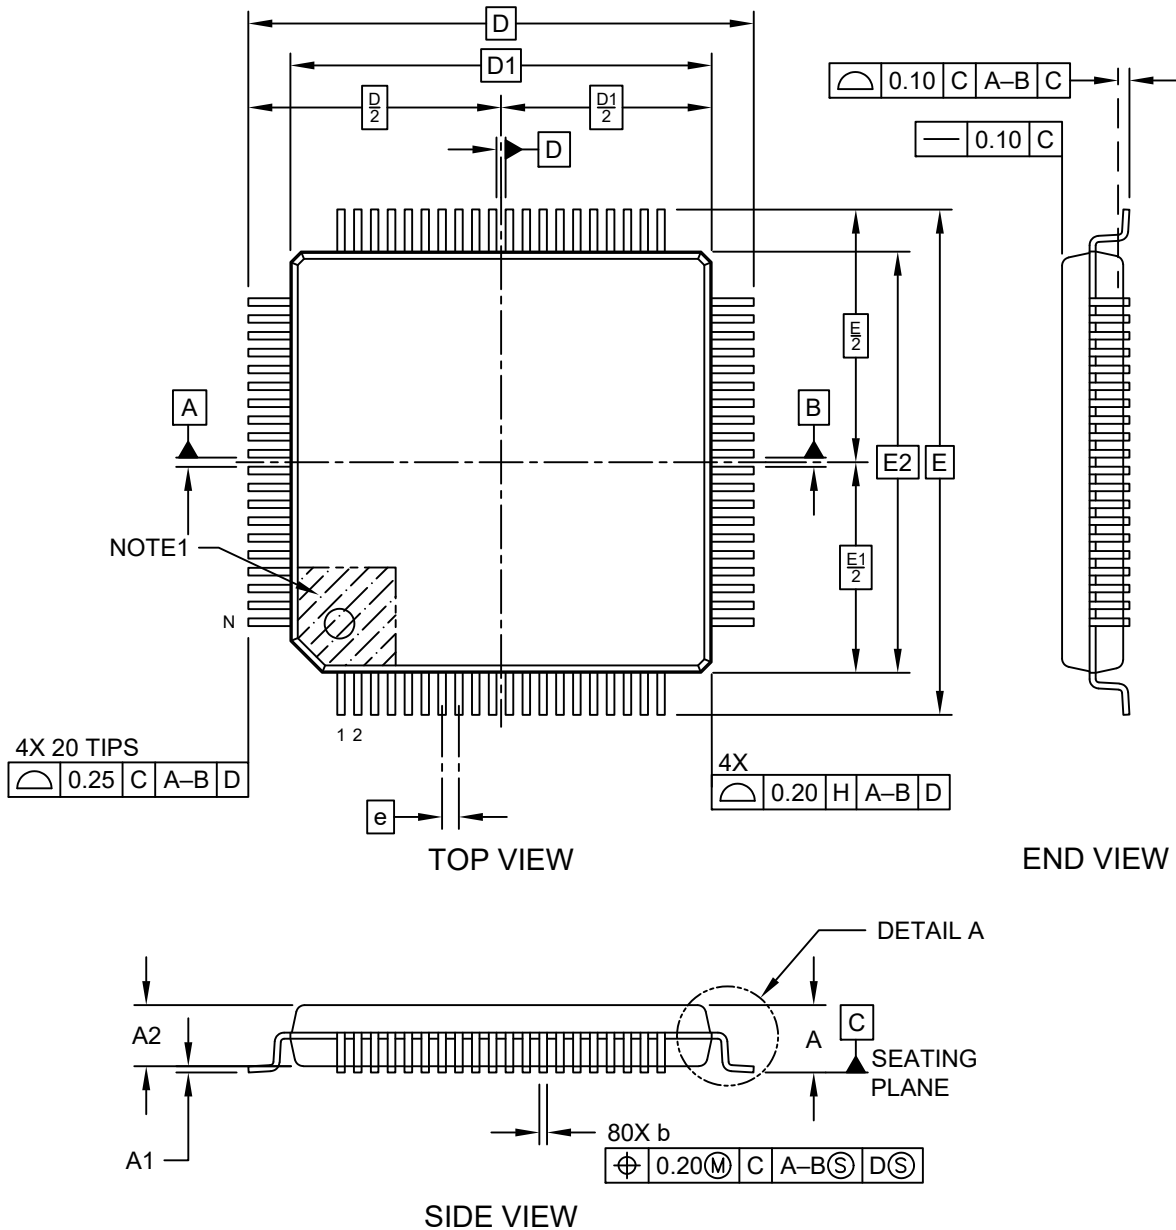

80-Lead Plastic Low Profile Quad Flat Pack (CGA) - 10x10x1.4 mm Body [LQFP] Micrel Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

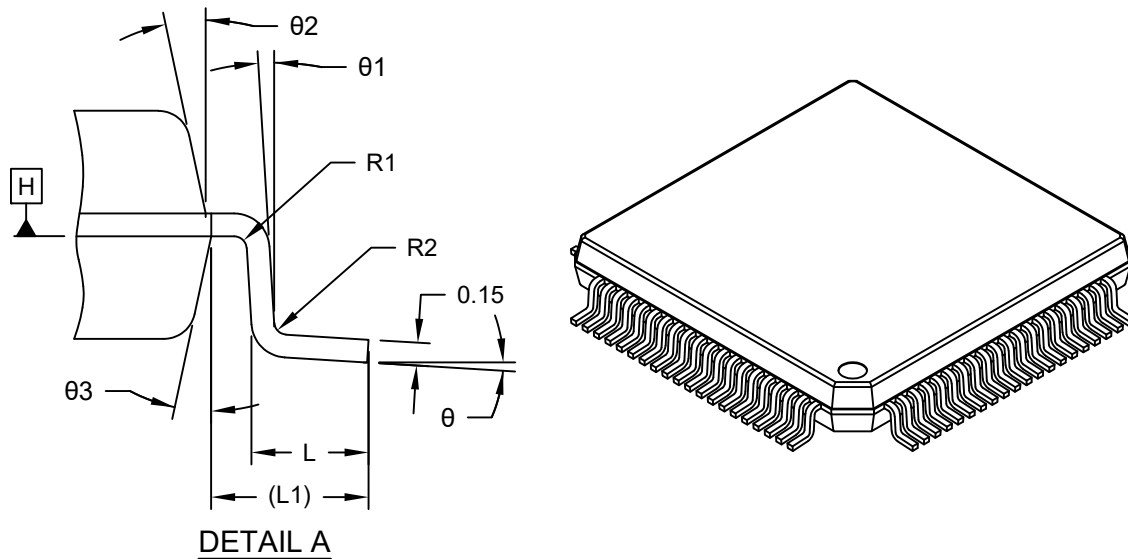


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		80		
Pitch	e		0.40 BSC		
Overall Height	A		-	-	1.60
Standoff	A1		0.05	-	0.15
Molded Package Thickness	A2		1.35	1.40	1.45
Overall Length	D		12.00 BSC		
Molded Package Length	D1		10.00 BSC		
Overall Width	E		12.00 BSC		
Molded Package Width	E1		10.00 BSC		
Terminal Width	b		0.13	0.18	0.23
Terminal Thickness	c		0.09	-	0.20
Terminal Length	L		0.45	0.60	0.75
Footprint	L1		1.00 REF		
Lead Bend Radius	R1		0.08	-	-
Lead Bend Radius	R2		0.08	-	0.20
Foot Angle	θ		0°	3.5°	7°
Lead Angle	θ1		0°	-	-
Mold Draft Angle	θ2		11°	12°	13°
Mold Draft Angle	θ3		11°	12°	13°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

80-Lead Plastic Low Profile Quad Flat Pack (CGA) - 10x10x1.4 mm Body [LQFP] Micrel Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

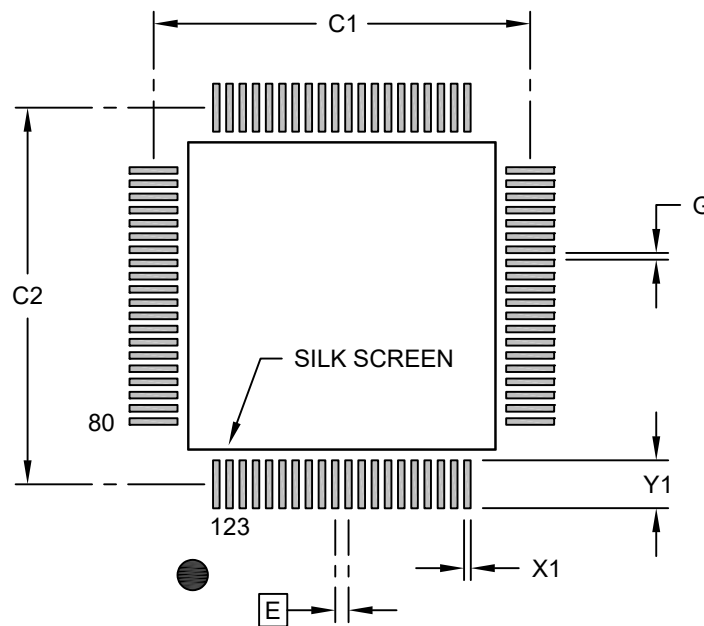

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.40 BSC		
Contact Pad Spacing	C1		11.40	
Contact Pad Spacing	C2		11.40	
Contact Pad Width (X80)	X1			0.20
Contact Pad Length (X80)	Y1			1.45
Contact Pad to Contact Pad (X76)	G	0.20		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3075 Rev. A