



**8-Lead Micro Small Outline Package (DPA) - 3x3 mm Body [MSOP]
With 2.36x1.73 mm Exposed Pad; Micrel Legacy Package eP-MSOP-08L**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

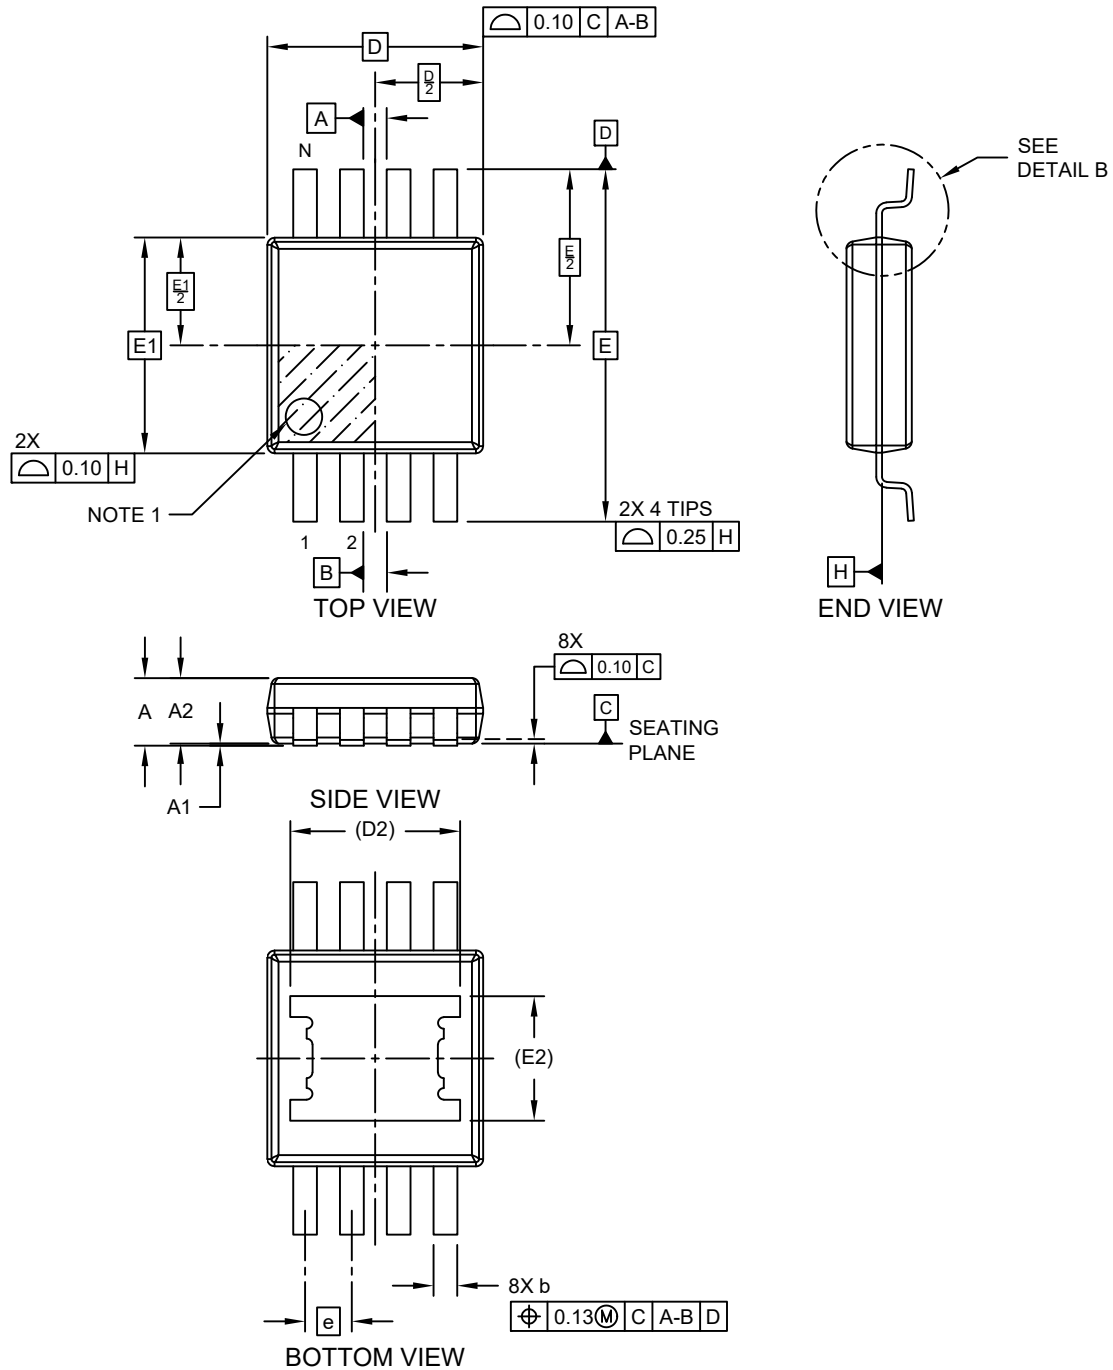


8-Lead Micro Small Outline Package (DPA) - 3x3 mm Body [MSOP] With 2.36x1.73 mm Exposed Pad; Micel Legacy Package eP-MSOP-08L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

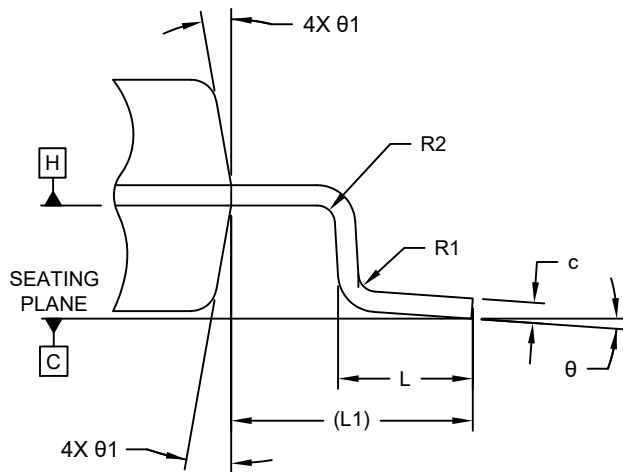

DETAIL B
ROTATED FOR CLARITY

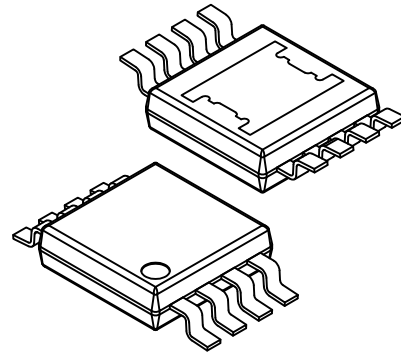


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	8		
Pitch	e	0.65 BSC		
Overall Height	A	0.84	0.94	1.04
Standoff	A1	0.03	0.08	0.13
Molded Package Thickness	A2	0.81	0.86	0.91
Overall Length	D	3.00 BSC		
Overall Width	E	4.90 BSC		
Molded Package Width	E1	3.00 BSC		
Exposed Pad Length	D2	2.36 REF		
Exposed Pad Width	E2	1.73 REF		
Terminal Width	b	0.30	0.33	0.43
Terminal Thickness	c	0.10	0.15	0.20
Terminal Length	L	0.43	0.53	0.63
Footprint	L1	0.95 REF		
Lead Bend Radius	R1	0.07	—	—
Lead Bend Radius	R2	0.07	—	—
Foot Angle	θ	0°	—	8°
Mold Draft Angle	θ1	5°	—	15°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

8-Lead Micro Small Outline Package (DPA) - 3x3 mm Body [MSOP] With 2.36x1.73 mm Exposed Pad; Micel Legacy Package eP-MSOP-08L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

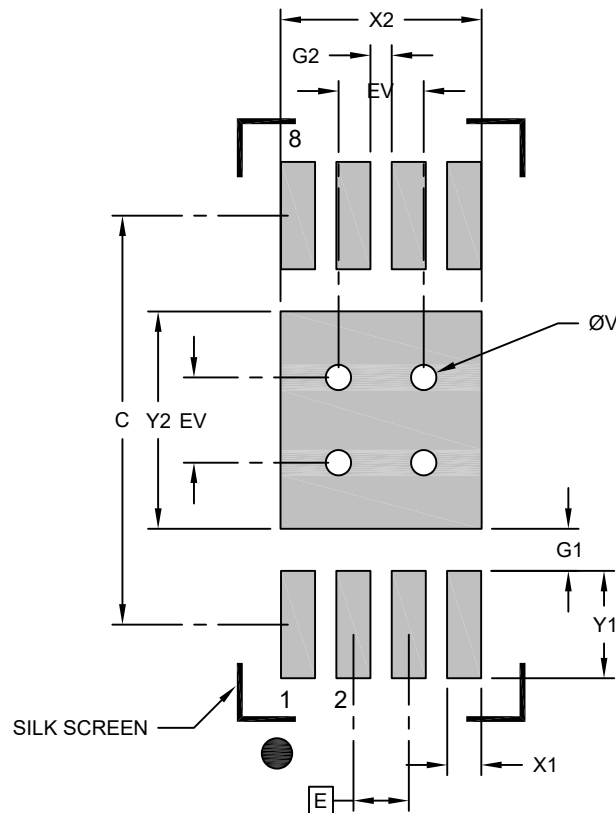

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65		
Center Pad Width	X2			2.36
Center Pad Length	Y2			2.55
Contact Pad Spacing	C		4.80	
Contact Pad Width (X8)	X1			0.40
Contact Pad Length (X8)	Y1			1.26
Contact Pad to Center Pad (X8)	G1	0.50		
Contact Pad to Contact Pad (X6)	G2	0.25		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3085 Rev A