


54-Lead Plastic Quad Flat, No Lead Package (NTA) - 10x6x2 mm Body [QFN]
Micrel Legacy P2QFN106-54LD-PL-1


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

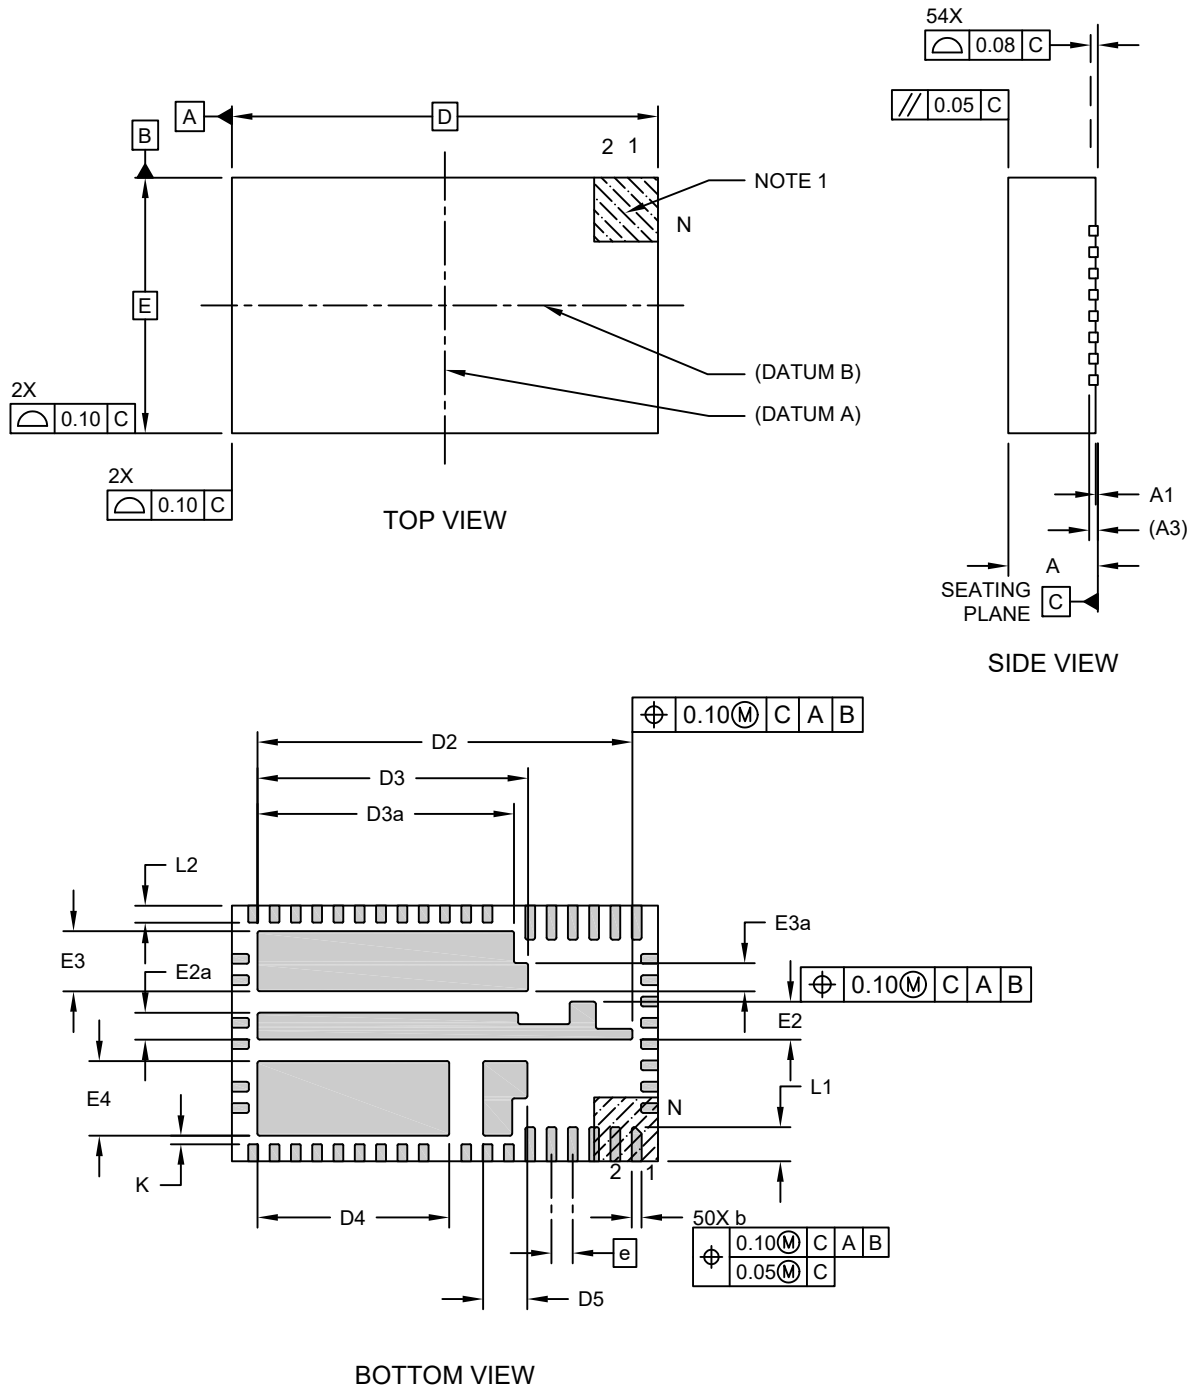

54-Lead Plastic Quad Flat, No Lead Package (NTA) - 10x6x2 mm Body [QFN]

Micrel Legacy P2QFN106-54LD-PL-1

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

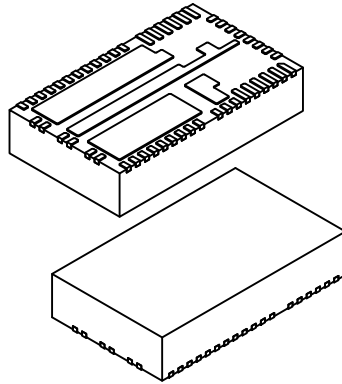


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	54		
Pitch	e	0.50 BSC		
Overall Height	A	1.90	2.00	2.10
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.203 REF		
Overall Length	D	10.00 BSC		
Exposed Pad Length	D2	8.75	8.80	8.85
Exposed Pad Length	D3	6.30	6.35	6.40
Exposed Pad Length	D3a	5.97	6.02	6.07
Exposed Pad Length	D4	4.45	4.50	4.55
Exposed Pad Length	D5	0.99	1.04	1.09
Overall Width	E	6.00 BSC		
Exposed Pad Width	E2	0.84	0.89	0.94
Exposed Pad Width	E2a	0.58	0.63	0.68
Exposed Pad Width	E3	1.36	1.41	1.46
Exposed Pad Width	E3a	0.61	0.66	0.71
Exposed Pad Width	E4	1.70	1.75	1.80
Terminal Width	b	0.18	0.23	0.28
Terminal Length (X12)	L1	0.75	0.80	0.85
Terminal Length (X38)	L2	0.35	0.40	0.45
Terminal-to-Exposed-Pad	K	0.20	—	—

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

**54-Lead Plastic Quad Flat, No Lead Package (NTA) - 10x6x2 mm Body [QFN]
Micrel Legacy P2QFN106-54LD-PL-1**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/package3>

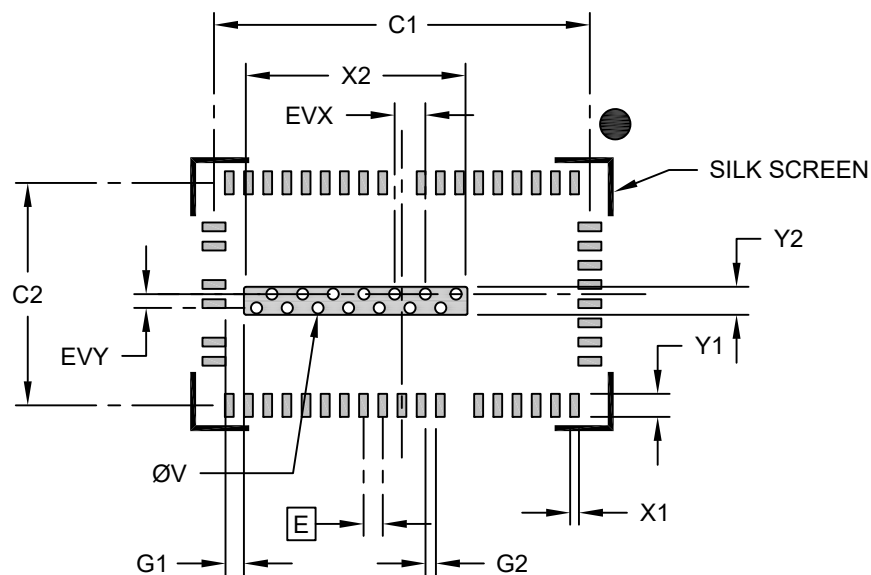

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Center Pad Length	X2			5.83
Center Pad Width	Y2			0.73
Contact Pad Spacing	C1		9.80	
Contact Pad Spacing	C2		5.80	
Contact Pad Width	X1		0.23	
Contact Pad Length	Y1		0.60	
Contact Pad to Center Pad	G1	0.48		
Contact Pad to Contact Pad	G2	0.20		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EVX		0.80	
Thermal Via Pitch	EVY		0.36	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3086 Rev A