
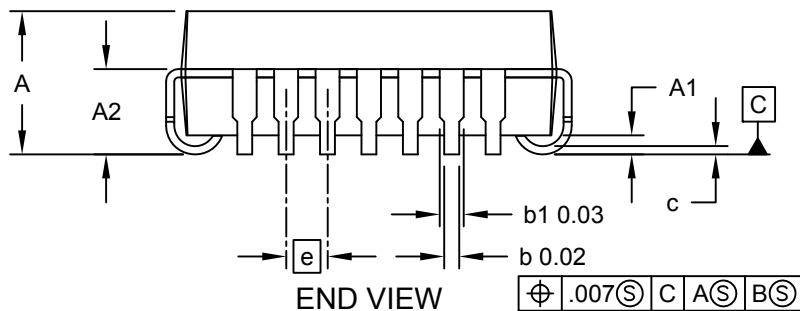



28-Lead Plastic Leadless Chip Carrier, Square (BFA) - [PLCC] Micrel Legacy Package PLCC-28LD-PL-1

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

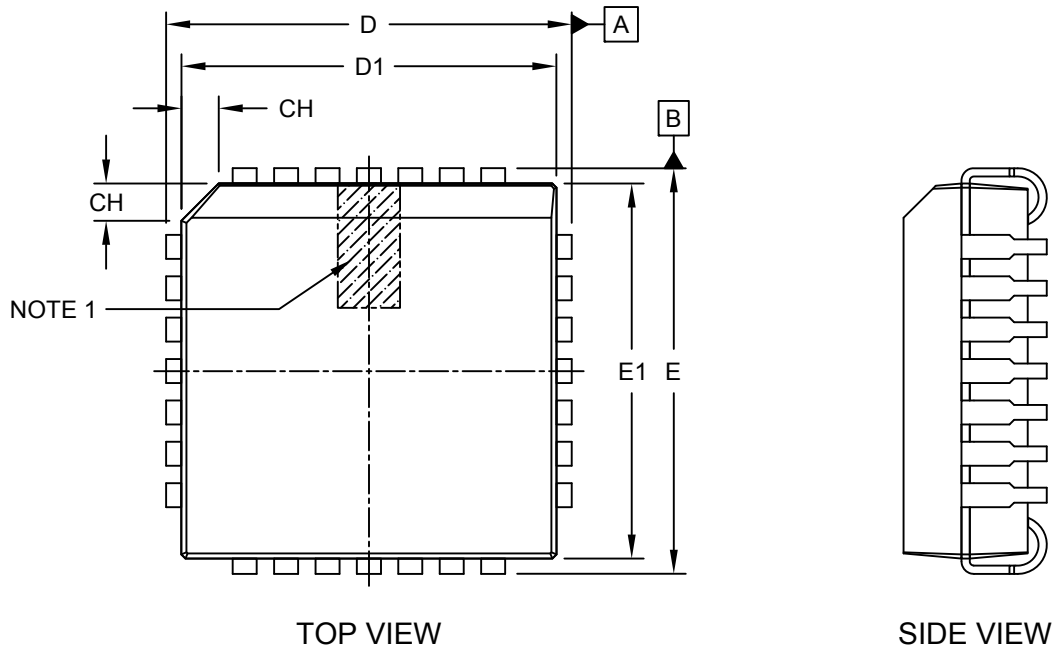

28-Lead Plastic Leadless Chip Carrier, Square (BFA) - [PLCC] Micrel Legacy Package PLCC-28LD-PL-1

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

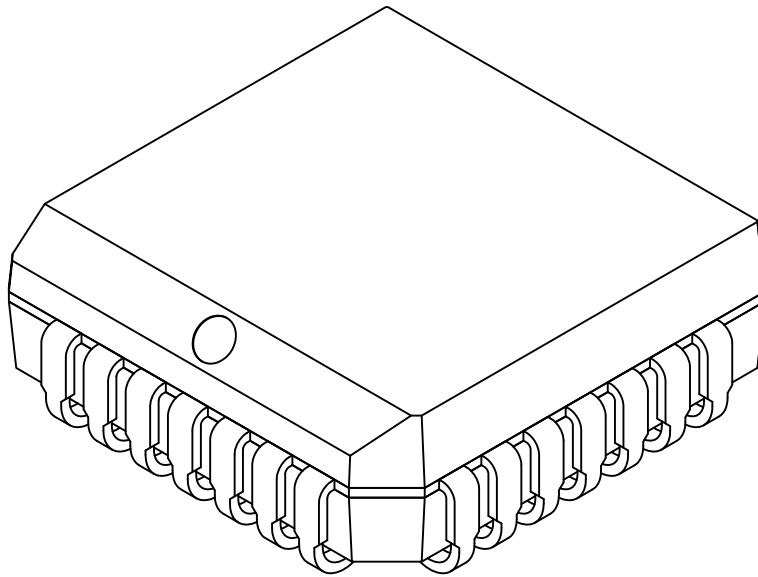


Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N	28		
Pitch	e	.050		
Overall Height	A	.165	.172	.180
Contact Height	A2	.090	.101	.120
Standoff	A1	.020	-	-
Corner Chamfer	CH	.042	-	.048
Overall Width	E	.485	.490	.495
Overall Length	D	.485	.490	.495
Molded Package Width	E1	.450	.452	.456
Molded Package Length	D1	.450	.452	.456
Lead Thickness	c	.0097	.0100	.0103
Upper Lead Width	b1	.026	-	.032
Lower Lead Width	b	.013	-	.021

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

28-Lead Plastic Leadless Chip Carrier, Square (BFA) - [PLCC] Micrel Legacy Package PLCC-28LD-PL-1

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

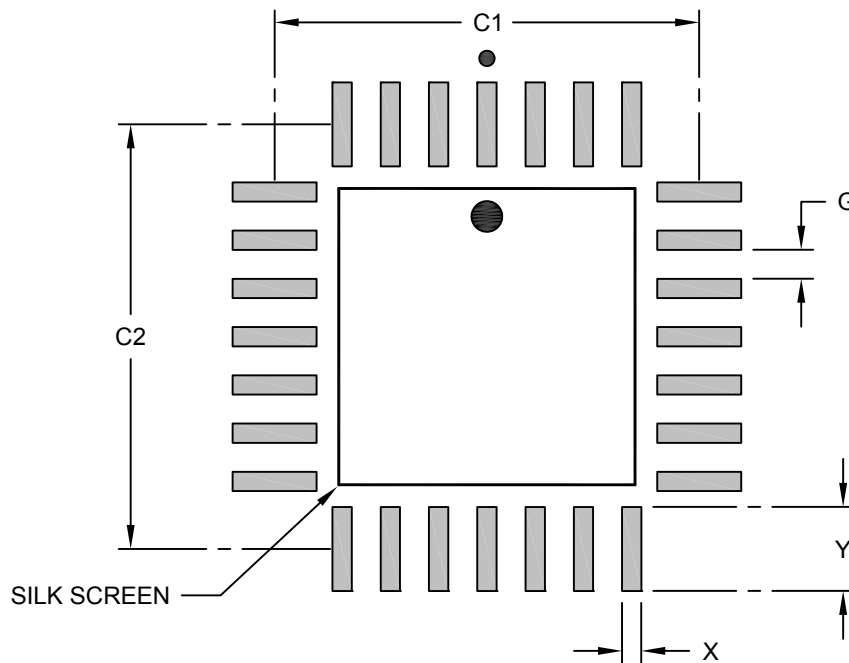

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	.050 BSC		
Contact Pad Spacing	C1		.440	
Contact Pad Spacing	C2		.440	
Contact Pad Width (Xnn)	X			.020
Contact Pad Length (Xnn)	Y			.087
Contact Pad to Contact Pad (Xnn)	G	.030		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-3090 Rev A