



**28-Lead Very Thin Plastic Quad Flat, No Lead Package (PKA) - 5x6x0.9 mm Body [VQFN]
With Multiple Exposed Pads and Fused Terminals; Micrel Legacy QFN56-28LD-PL-1**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

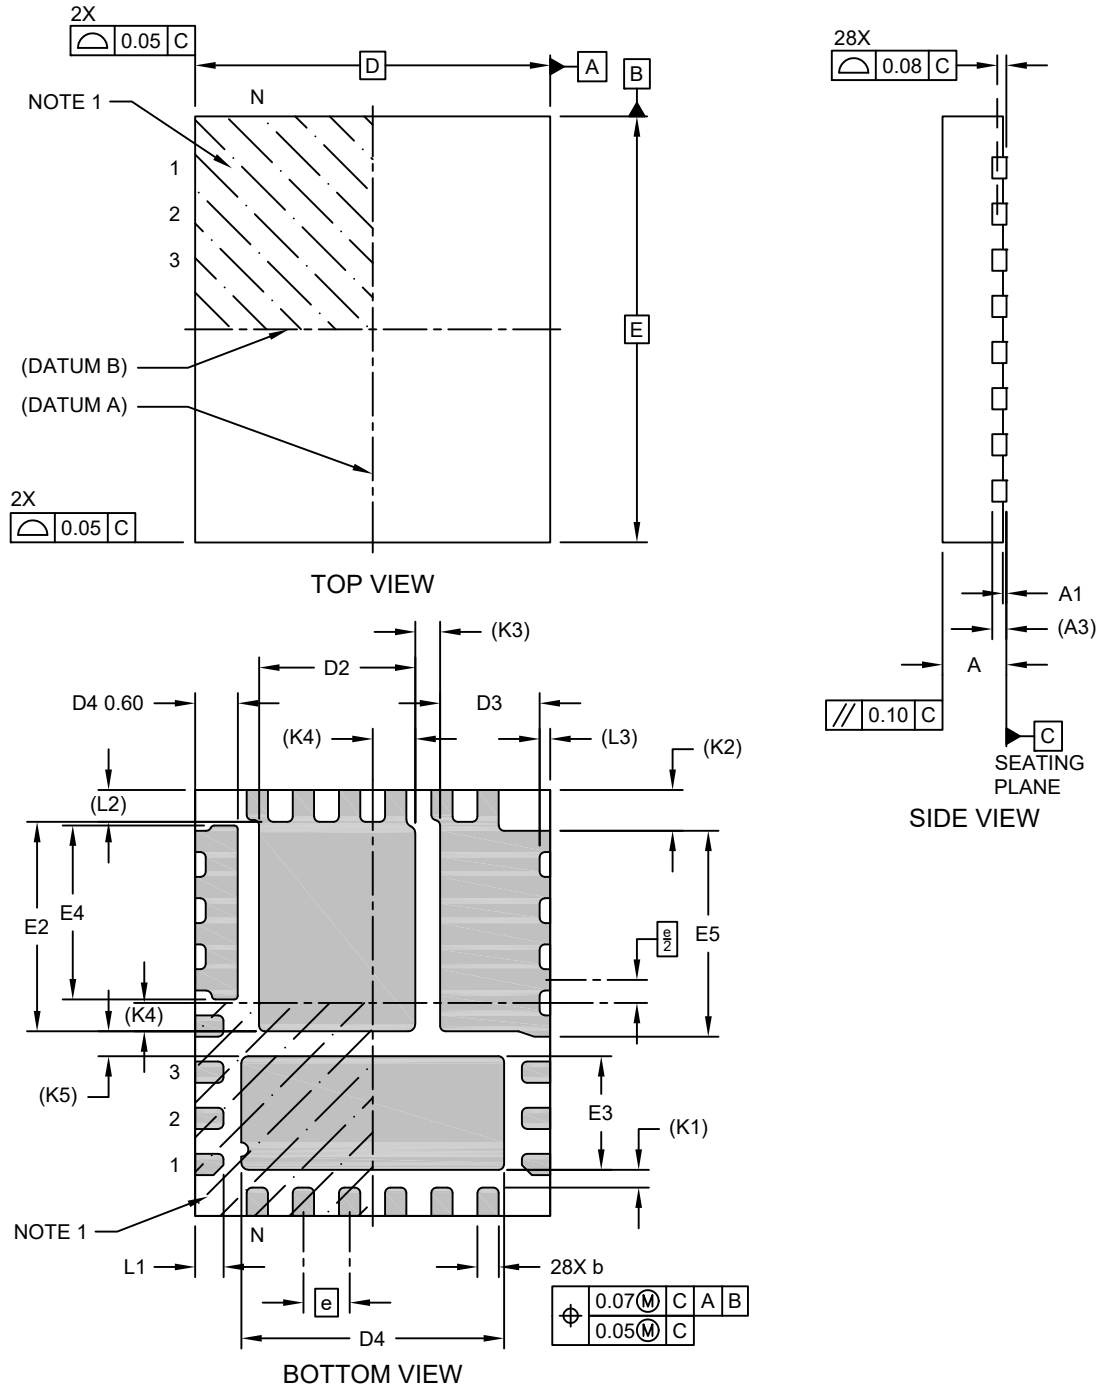

**28-Lead Very Thin Plastic Quad Flat, No Lead Package (PKA) - 5x6x0.9 mm Body [VQFN]
With Multiple Exposed Pads and Fused Terminals; Micrel Legacy QFN56-28LD-PL-1**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

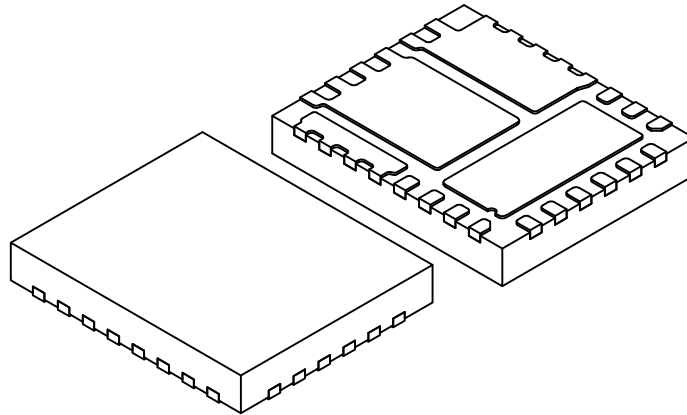


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	28		
Pitch	e	0.65 BSC		
Overall Height	A	0.00	0.02	0.05
Standoff	A1	0.80	0.85	0.85
Terminal Thickness	A3	0.20 REF		
Overall Length	D	5.00 BSC		
Exposed Pad Length	D2	2.15	2.20	2.25
Exposed Pad Length	D3	1.35	1.40	1.45
Exposed Pad Length	D4	3.65	3.70	3.75
Overall Width	E	6.00 BSC		
Exposed Pad Width	E2	2.90	2.95	3.00
Exposed Pad Width	E3	1.575	1.60	1.625
Exposed Pad Width	E4	2.40	2.45	2.50
Exposed Pad Width	E5	2.85	2.90	2.95
Terminal Width	b	0.25	0.30	0.35
Terminal Length	L1	0.35	0.40	0.45
Terminal Length	L2	0.45 REF		
Terminal Length	L3	0.15 REF		
Terminal to Exposed Pad	K1	0.25 REF		
Body Edge to Exposed Pad	K2	0.575 REF		
Exposed Pad to Exposed Pad	K3	0.035 REF		
Exposed Pad Offset	K4	0.40 REF		
Exposed Pad to Exposed Pad	K5	0.35 REF		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

28-Lead Very Thin Plastic Quad Flat, No Lead Package (PKA) - 5x6x0.9 mm Body [VQFN] With Multiple Exposed Pads and Fused Terminals; Micrel Legacy QFN56-28LD-PL-1

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

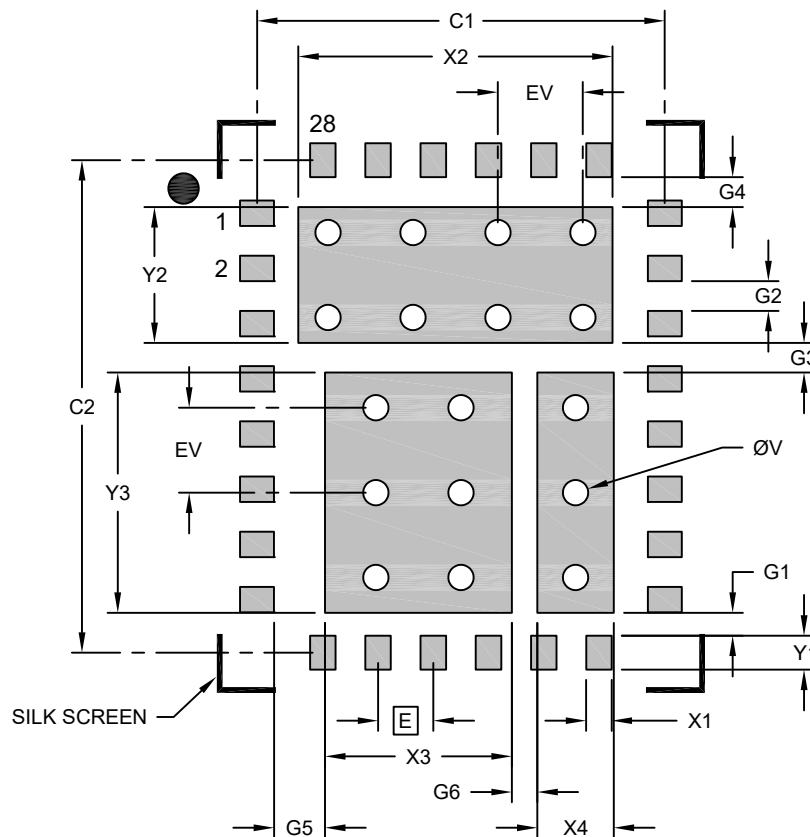

RECOMMENDED LAND PATTERN

Units		MILLIMETERS			Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX	Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC			Contact Pad Spacing	C2		5.80	
Center Pad Width	X2			3.70	Contact Pad to Center Pad	G1	0.12		
Center Pad Width	X3			2.20	Contact Pad to Contact Pad	G2	0.35		
Center Pad Width	X4			0.90	Center Pad to Center Pad	G3	0.35		
Center Pad Length	Y2			1.60	Contact Pad to Center Pad	G4	0.35		
Center Pad Length	Y3			2.83	Contact Pad to Center Pad	G5	0.60		
Contact Pad Width	X1			0.30	Center Pad to Center Pad	G6	0.13		
Contact Pad Length	Y1			0.40	Thermal Via Diameter	V		0.30	
Contact Pad Spacing	C1		4.80		Thermal Via Pitch	EV		1.00	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3120 Rev A