


Packaging Diagrams and Parameters

5-Lead Plastic Small Outline Transistor (D3A) [SC70] Micrel Legacy Package: YC

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

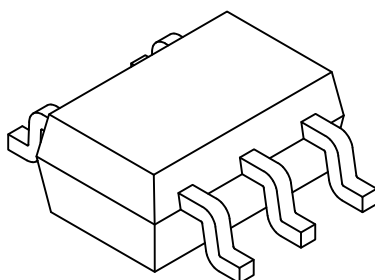

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N	5		
Pitch	e	0.65 BSC		
Overall Height	A	0.80	0.95	1.10
Standoff	A1	0.00	0.05	0.10
Molded Package Thickness	A2	0.80	0.90	1.00
Overall Length	D	1.80	2.00	2.25
Overall Width	E	1.80	2.10	2.40
Molded Package Width	E1	1.15	1.25	1.35
Terminal Width	b	0.15	-	0.30
Terminal Length	L	0.21	-	0.46
Lead Thickness	c	0.08	-	0.30

Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.15mm per side.
3. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerances, for information purposes only.

Land Pattern

5-Lead Plastic Small Outline Transistor (D3A) [SC70] Micrel Legacy Package: YC

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

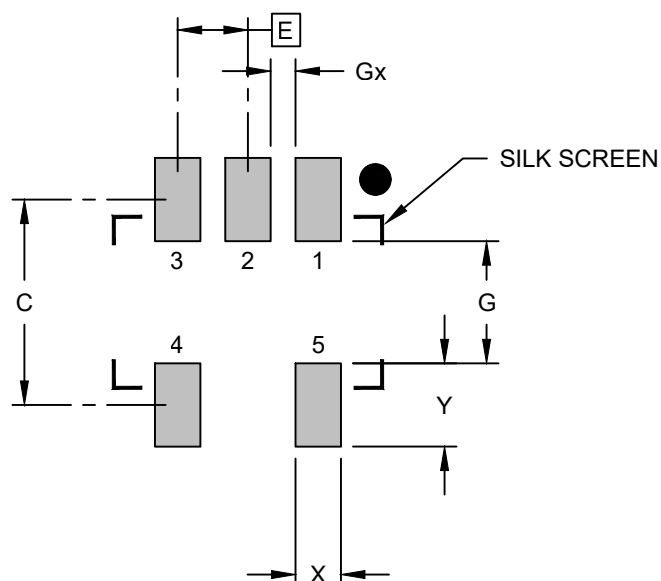

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Spacing	C		1.90	
Contact Pad Width	X			0.42
Contact Pad Length	Y			0.77
Distance Between Pads	G	1.13		
Distance Between Pads	Gx	0.23		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-03132 Rev A