


4-Lead Plastic Small Outline Transistor (DAA) [SOT-143] Micrel Legacy Package


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

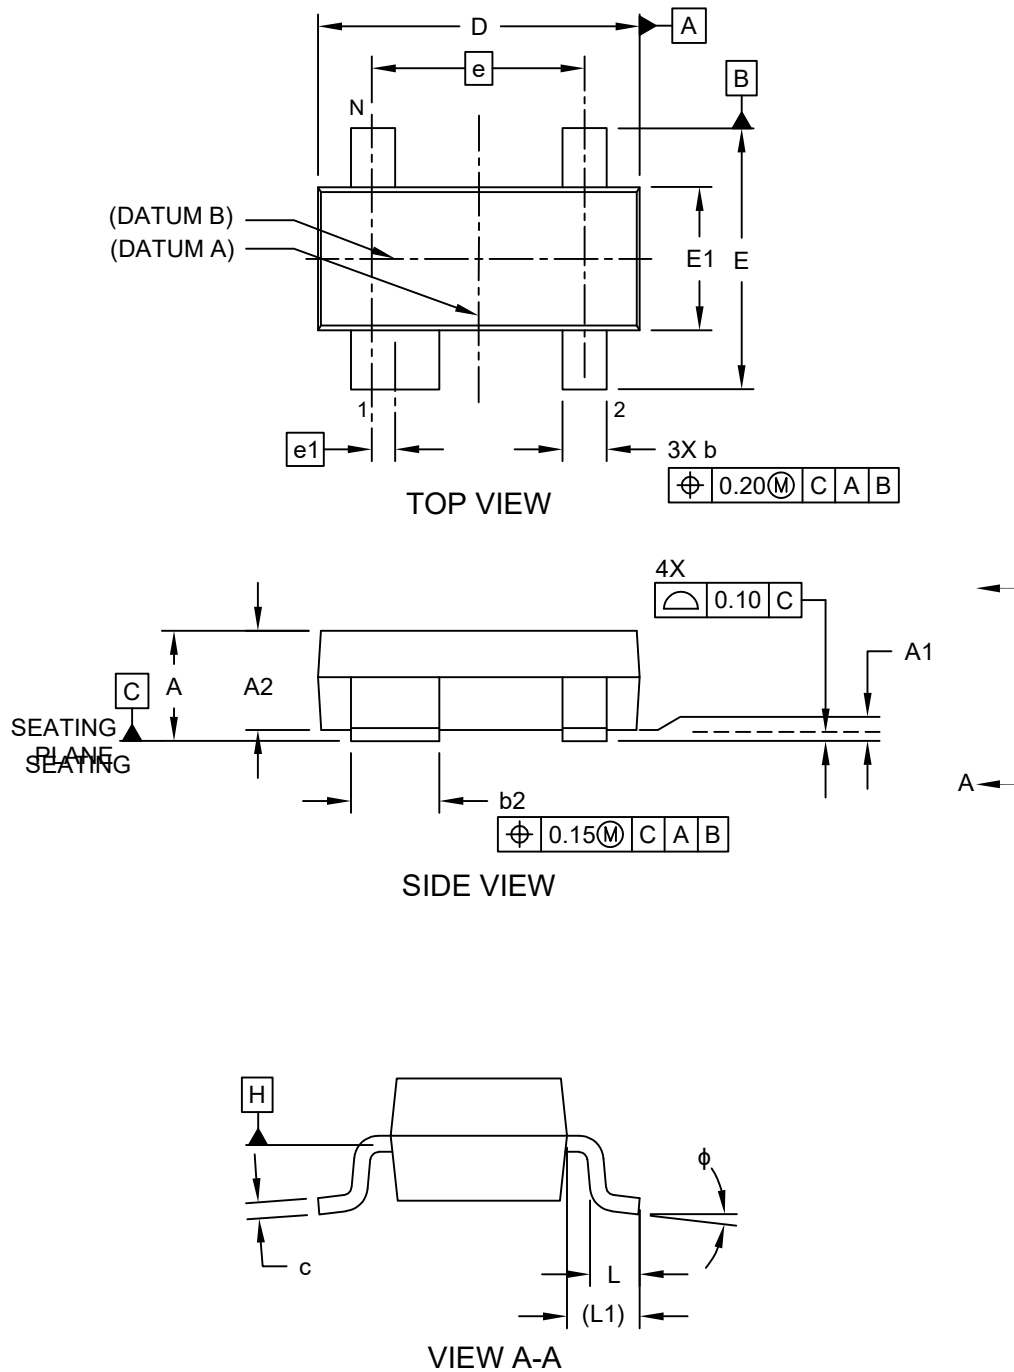

Microchip Technology Drawing C04-1137 Rev. A Sheet 1 of 2

4-Lead Plastic Small Outline Transistor (DAA) [SOT-143] Micrel Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

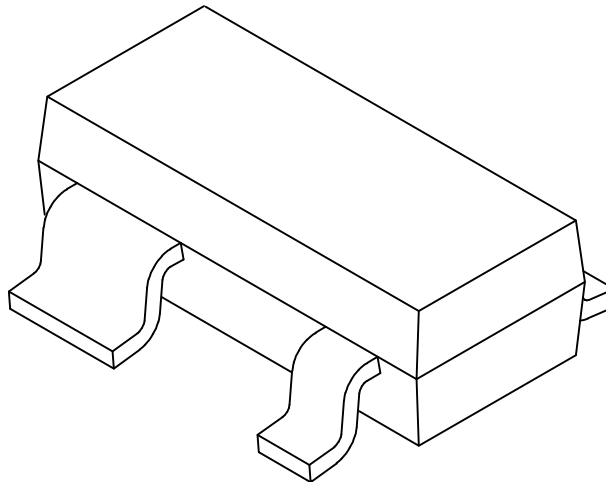


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N	4		
Pitch	e	1.90 BSC		
Pin 1 Offset	e1	0.20 BSC		
Overall Height	A	0.89	1.00	1.14
Standoff ϕ	A1	0.013	-	0.20
Overall Width	E	2.10	2.37	2.64
Molded Package Width	E1	1.20	1.30	1.40
Overall Length	D	2.72	2.92	3.04
Foot Length	L	0.21	0.31	0.41
Footprint	L1	0.54 REF		
Foot Angle	ϕ	0°	-	3°
Lead Thickness	c	-	.10	-
Lead 1 Width	b1	0.69	-	0.94
Leads 2, 3 & 4 Width	b	0.30	-	0.52

Notes:

- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.127mm per side.
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

4-Lead Plastic Small Outline Transistor (DAA) [SOT-143] Micrel Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

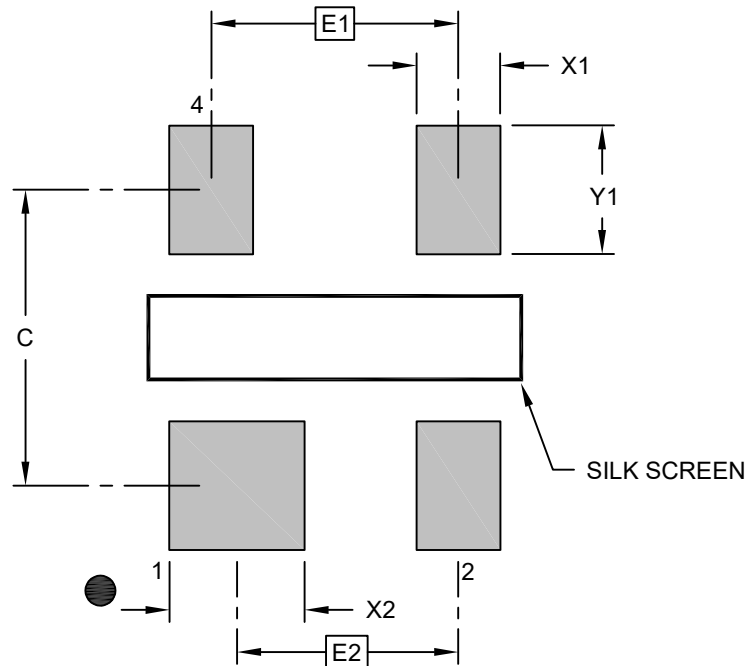

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E1	1.90 BSC		
Contact Pitch	E2	1.72 BSC		
Contact Pad Spacing	C		2.30	
Contact Pad Width (X3)	X1			0.65
Contact Pad Width	X2			1.05
Contact Pad Length (X4)	Y1			1.10

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.