



3-Lead Plastic Small Outline Transistor (D7A) [SOT23] Micrel Legacy Package SOT-023-03L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

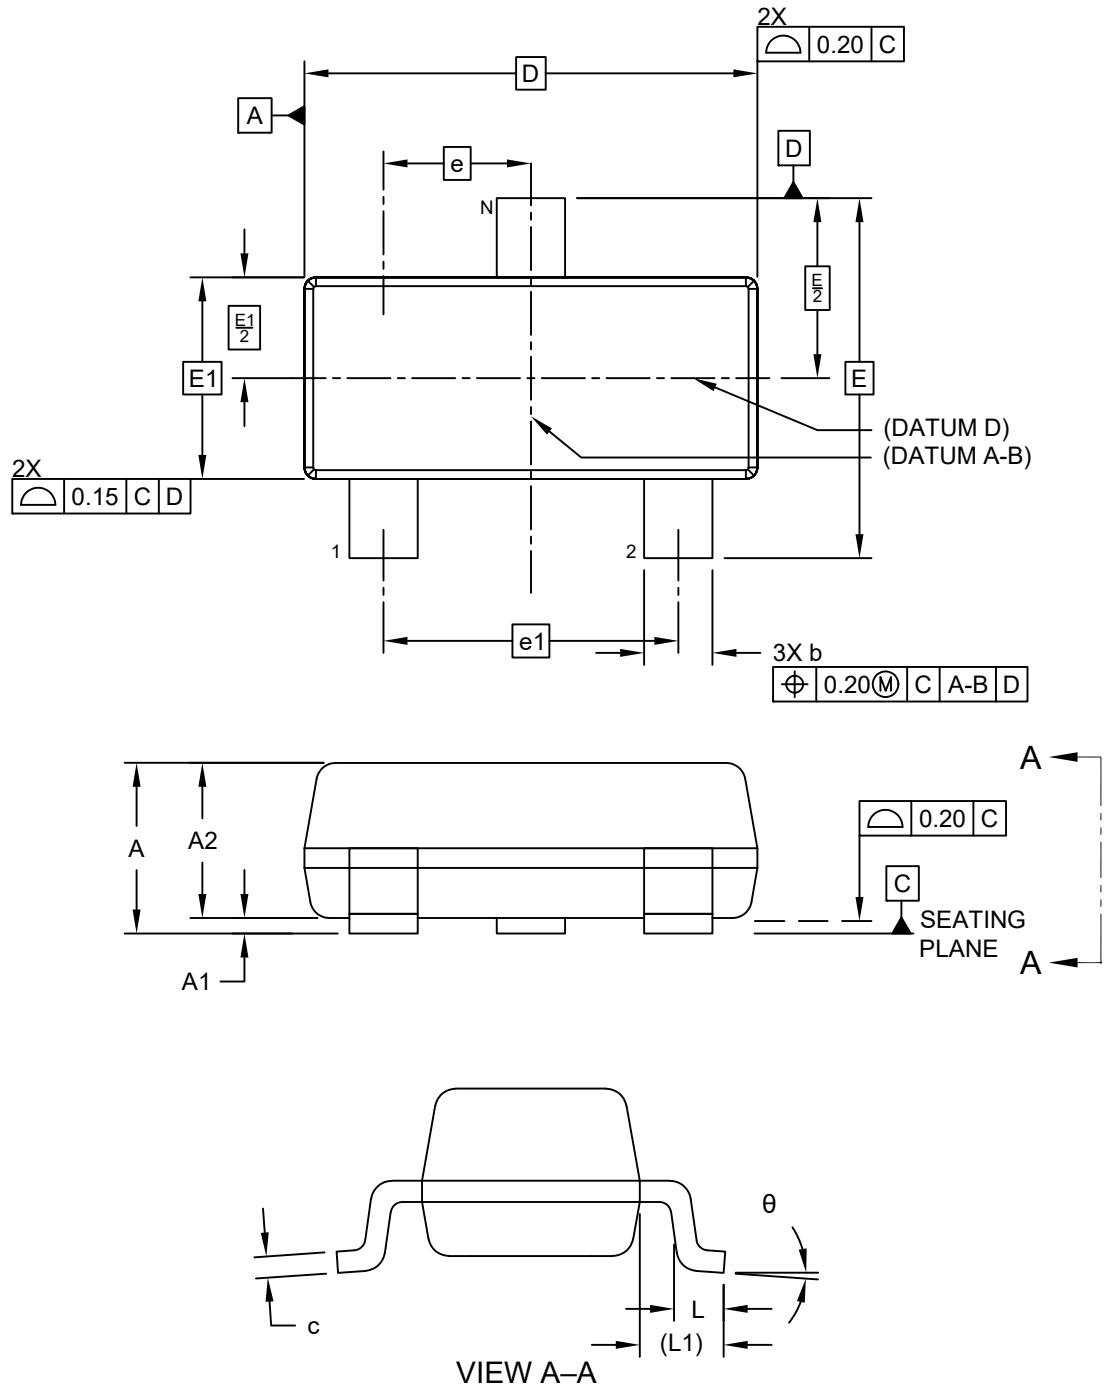

3-Lead Plastic Small Outline Transistor (D7A) [SOT23] Micrel Legacy Package SOT-023-03L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>




		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		3		
Pitch	e		0.95 BSC		
Outside Lead Pitch	e1		1.90 BSC		
Overall Height	A		0.89	1.00	1.12
Standoff	A1		0.013	–	0.10
Molded Package Thickness	A2		0.88	0.95	1.02
Overall Length	D		2.90 BSC		
Overall Width	E		2.32 BSC		
Molded Package Width	E1		1.30 BSC		
Terminal Width	b		0.37	–	0.51
Terminal Thickness	c		0.08	–	0.20
Terminal Length	L		0.21	0.31	0.41
Footprint	L1		0.54 REF		
Foot Angle	θ		0°	–	8°

Notes:

1. Dimension D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25mm per side
2. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

3-Lead Plastic Small Outline Transistor (D7A) [SOT23] Micrel Legacy Package SOT-023-03L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

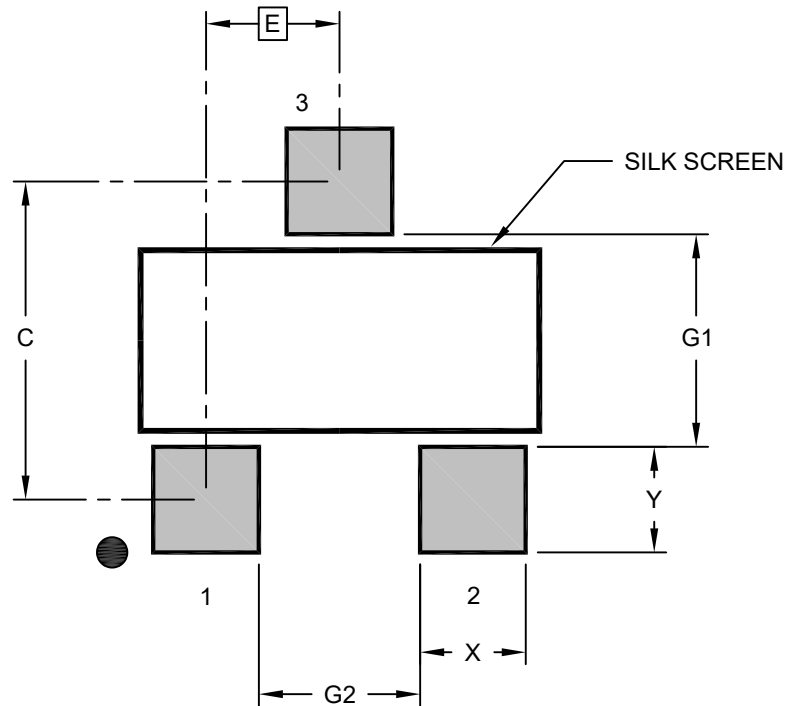

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.96 BSC		
Contact Pad Spacing	C		2.29	
Contact Pad Width (X3)	X			0.78
Contact Pad Length (X3)	Y			0.78
Contact Pad to Center Pad (X3)	G1	1.53		
Contact Pad to Contact Pad (X1)	G2	1.16		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.