



5-Lead Plastic Surface Flange-Mount Package (8BA) - [SPAK] **Micrel Legacy Package S-PAK-05L**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

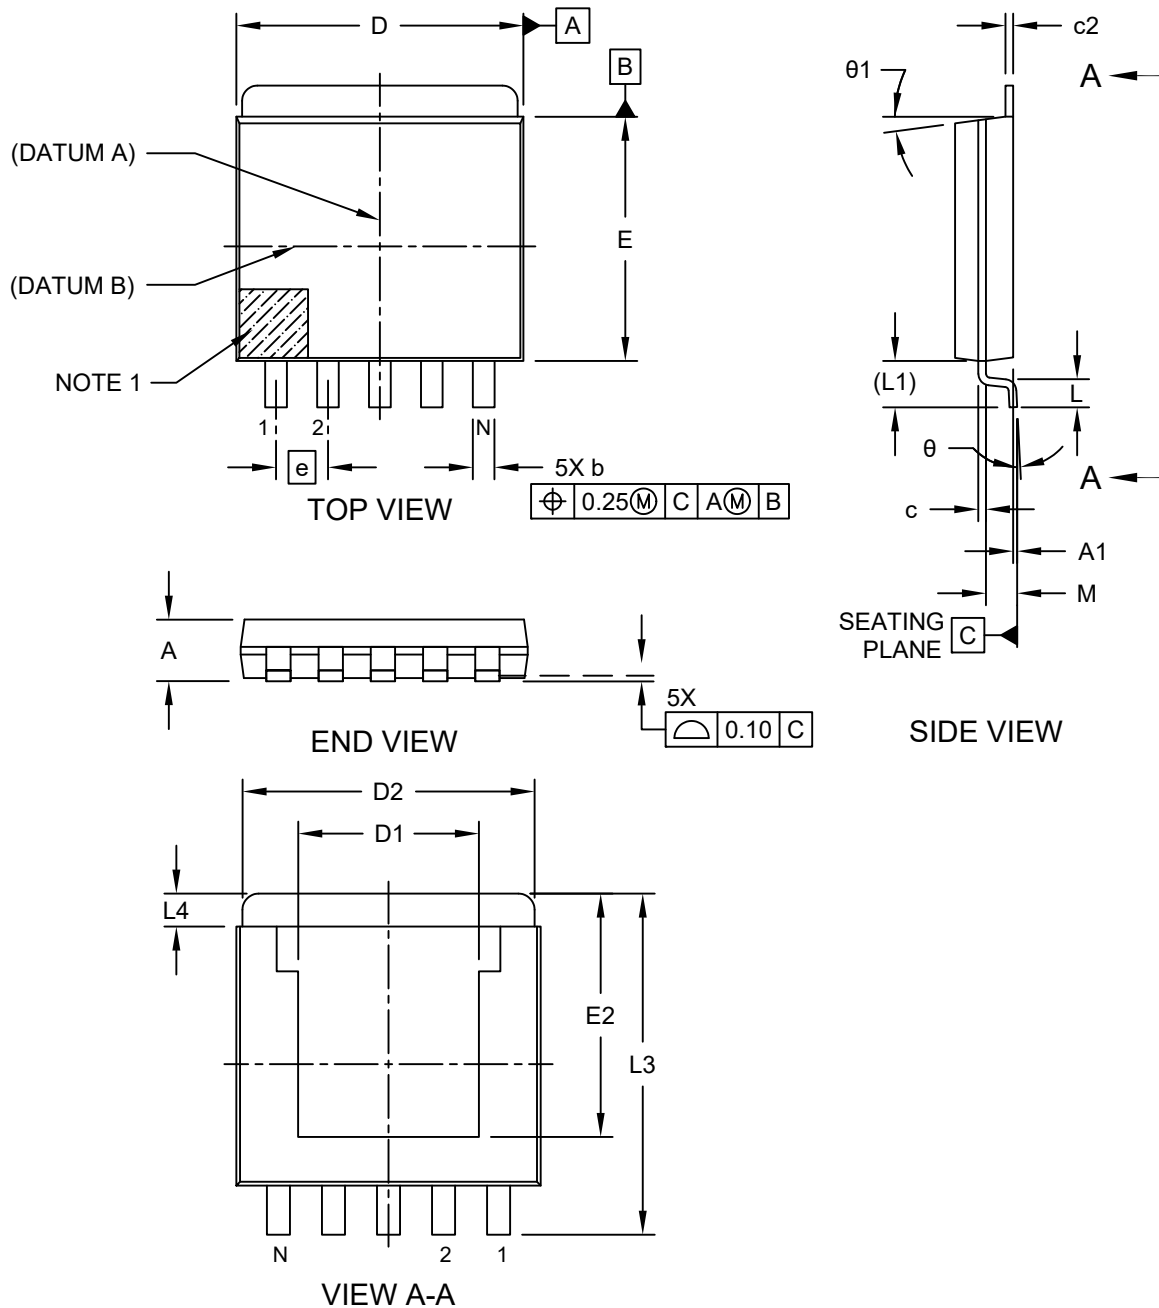

5-Lead Plastic Surface Flange-Mount Package (8BA) - [SPAK] Micrel Legacy Package S-PAK-05L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

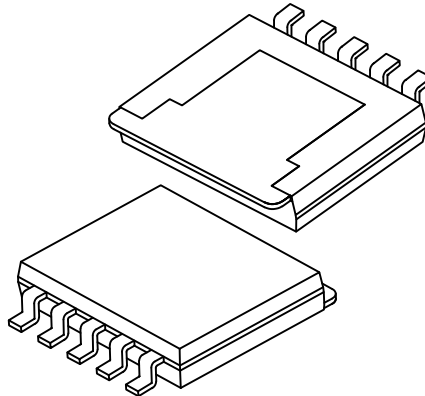


	Units		Millimeters		
Dimension Limits		MIN	NOM	MAX	
Number of Terminals	N		5		
Terminal Pitch	e		1.70 BSC		
Overall Height	A	1.78	1.91	2.03	
Standoff	A1	0.03	0.08	0.13	
Overall Width	D	9.27	9.40	9.52	
Tab Width	D2	8.89	9.02	9.14	
Exposed Pad Width	D1	5.45	5.58	5.71	
Molded Package Length	E	7.87	8.00	8.13	
Exposed Pad Length	E2	7.39	7.52	7.65	
Terminal Width	b	0.63	0.71	0.79	
Terminal Thickness	c	0.23	0.25	0.38	
Tab Thickness	c2	0.23	0.25	0.38	
Lead Length	L	0.79	0.92	1.04	
Footprint	L1		1.53 REF		
Overall Length	L3	10.41	10.54	10.67	
Tab Length	L4	0.76	1.02	1.27	
Seating Plane to Leadframe	M	0.89	1.02	1.14	
Footprint Angle	θ	0°	-	6°	
Mold Draft Angle	θ1	0°	-	15°	

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

5-Lead Plastic Surface Flange-Mount Package (8BA) - [SPAK] Micrel Legacy Package S-PAK-05L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

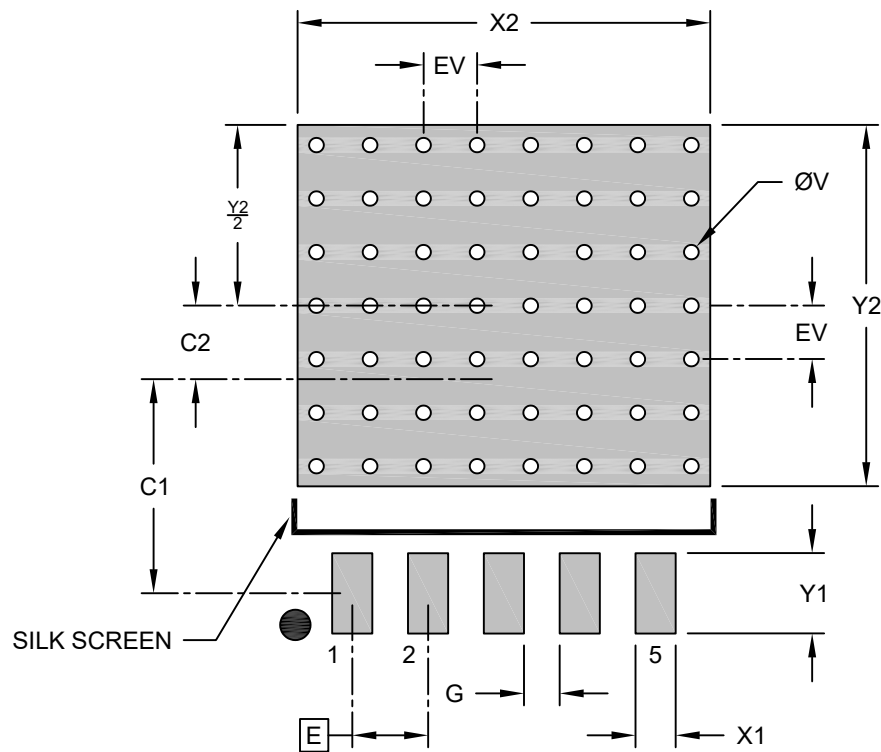

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.70 BSC		
Center Pad Width	X2			9.25
Center Pad Length	Y2			8.10
Contact Pad to Footprint Center	C1		4.80	
Footprint Center to Center Pad	C2		1.65	
Contact Pad Width (X5)	X1			0.90
Contact Pad Length (X5)	Y1			1.80
Contact Pad to Contact Pad (X4)	G	0.80		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3142 Rev A