
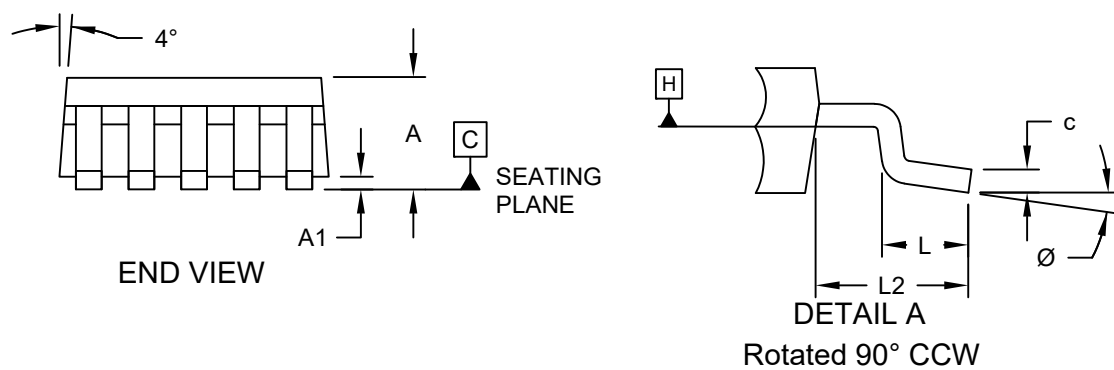



5-Lead Transistor Outline (9EA) - [TO-252] Option "A"

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

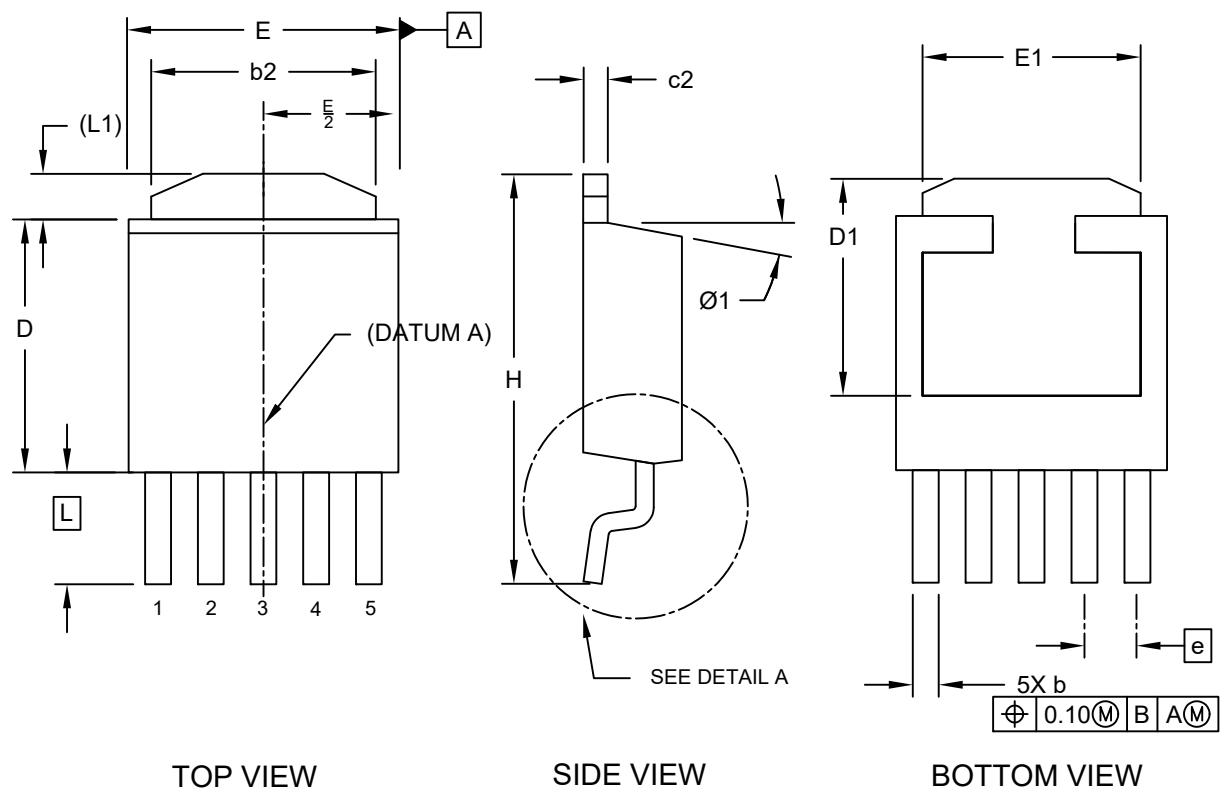

5-Lead Transistor Outline (9EA) - [TO-252] Option "A"

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

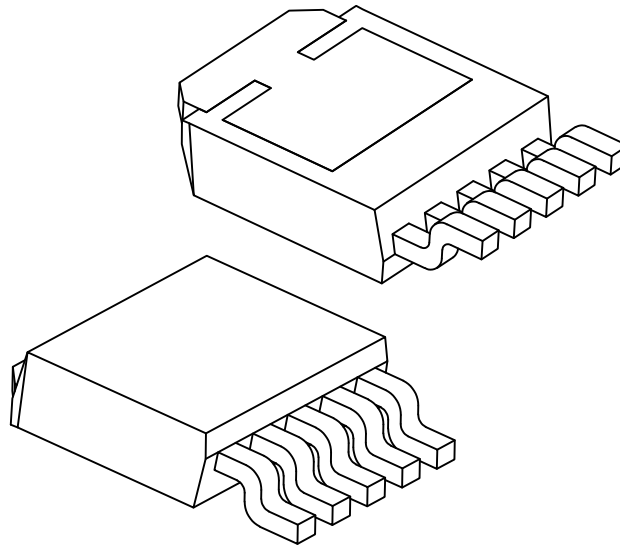


		MILLIMETERS		
Dimension Limits		Min	Nom	Max
Number of Leads	N	5		
Pitch	e	1.27 BSC		
Overall Height	A	2.18	—	2.38
Seating Plane Height	A1	—	—	0.127
Lead Width	b	0.508	—	0.771
Thermal Pad Width	b2	4.95	—	5.46
Lead Thickness	c	0.46	—	0.61
Thermal Pad Thickness	c2	0.46	—	0.89
Molded Body Length	D	5.97	—	6.22
Thermal Pad Length	D1	5.21	—	—
Total Width	E	6.35	—	6.73
Thermal Pad Width	E1	4.32	—	—
Overall Length	H	9.39	—	10.41
Foot Length	L	1.39	—	1.78
Tab Length	L1	1.067 REF		
Lead Length	L2	2.74 BSC		
Foot Angle	θ	0°	—	10°
Mold Draft Angle	θ1	0°	—	15°

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

5-Lead Transistor Outline (9EA) - [TO-252] Option "A"

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

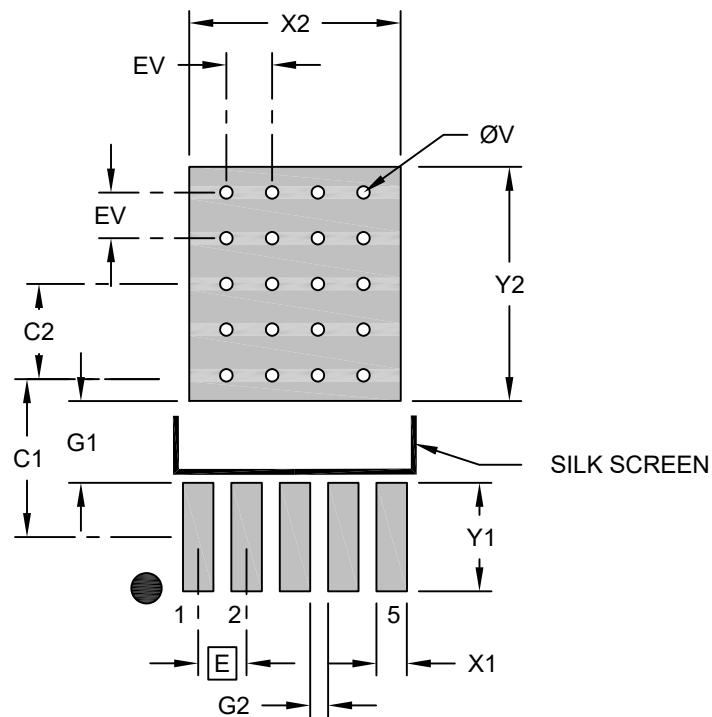

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	1.27 BSC		
Center Pad Width	X2			5.55
Center Pad Length	Y2			6.15
Contact Pad Spacing	C1		4.15	
Contact Pad Spacing	C2		2.50	
Contact Pad Width (X5)	X1			0.80
Contact Pad Length (X5)	Y1			2.85
Contact Pad to Center Pad (X5)	G1	2.15		
Contact Pad to Contact Pad (X4)	G2	0.47		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3168 Rev A