



20-Lead Plastic Thin Shrink Small Outline Package (ECA) - 4.4 mm Body [TSSOP]
Micrel Legacy Package TSSOP-20L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/package3>

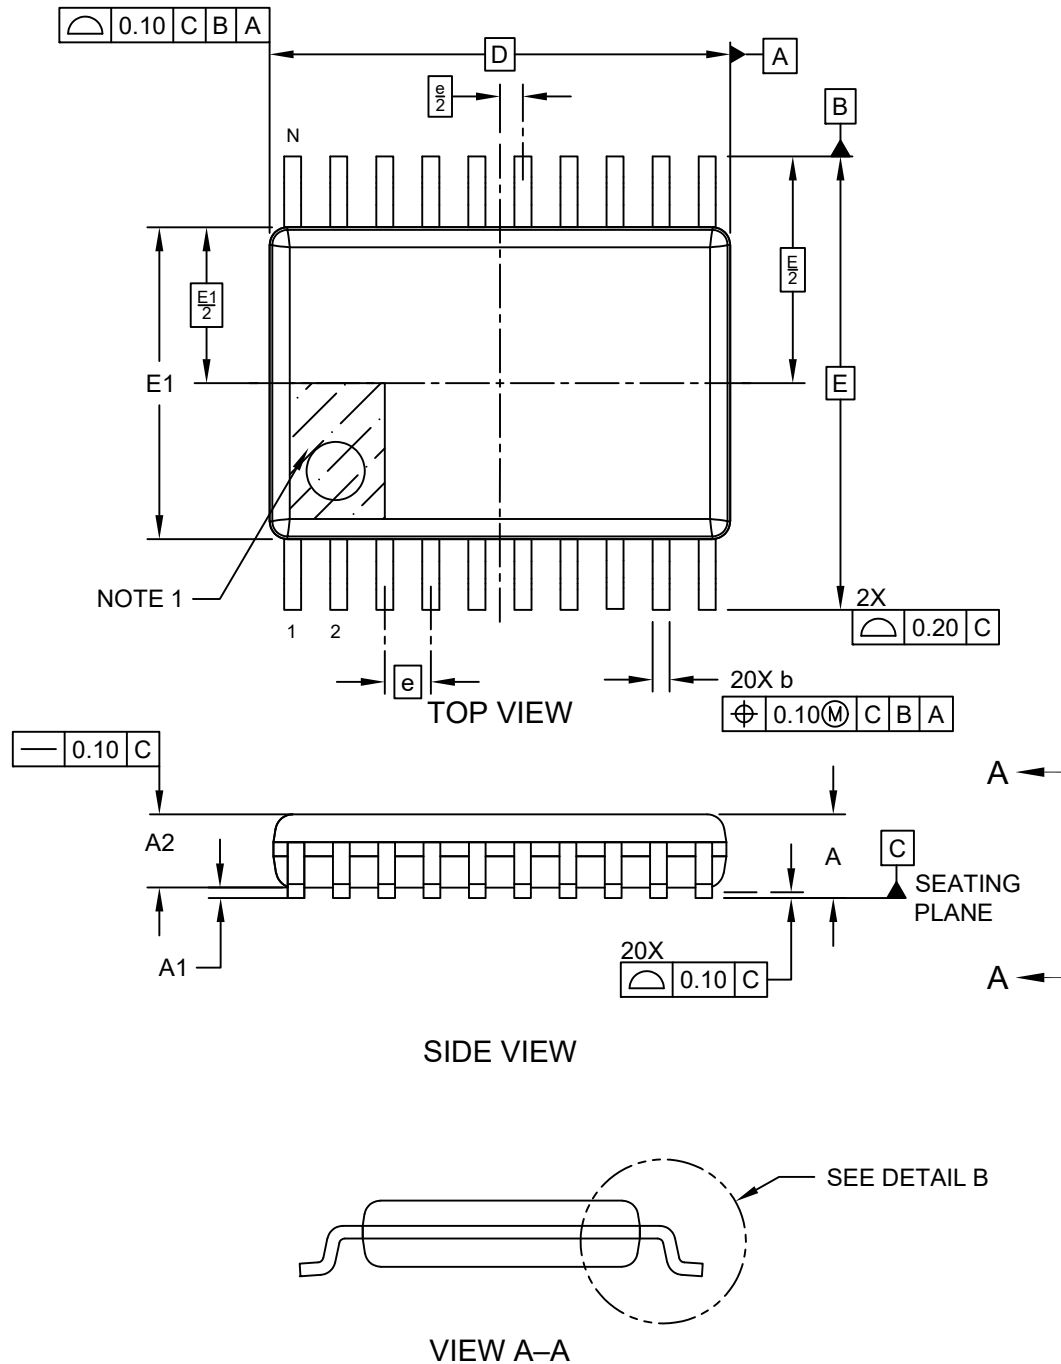

20-Lead Plastic Thin Shrink Small Outline Package (ECA) - 4.4 mm Body [TSSOP] Micrel Legacy Package TSSOP-20L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

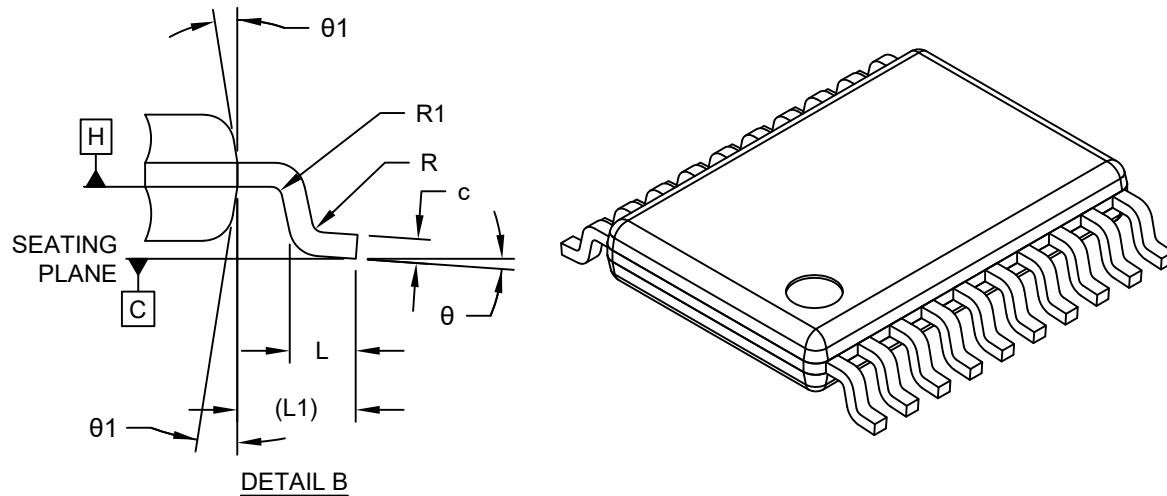


	Units	MILLIMETERS		
Dimension	Limits	MIN	NOM	MAX
Number of Terminals	N	20		
Pitch	e	0.65 BSC		
Overall Height	A	—	—	1.20
Standoff	A1	0.05	0.10	1.15
Molded Package Thickness	A2	0.80	0.90	1.05
Overall Length	D	6.50 BSC		
Overall Width	E		6.40 BSC	
Molded Package Width	E1	4.30	4.40	4.50
Terminal Width	b	0.19	0.24	0.30
Terminal Thickness	c	0.09	0.15	0.20
Terminal Length	L	0.45	0.60	0.75
Footprint	L1	1.00 REF		
Lead Bend Radius	R	0.09	-	-
Lead Bend Radius	R1	0.09	-	-
Foot Angle	θ	0°	-	8°
Mold Draft Angle	θ1	12° REF		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

20-Lead Plastic Thin Shrink Small Outline Package (ECA) - 4.4 mm Body [TSSOP] Micrel Legacy Package TSSOP-20L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

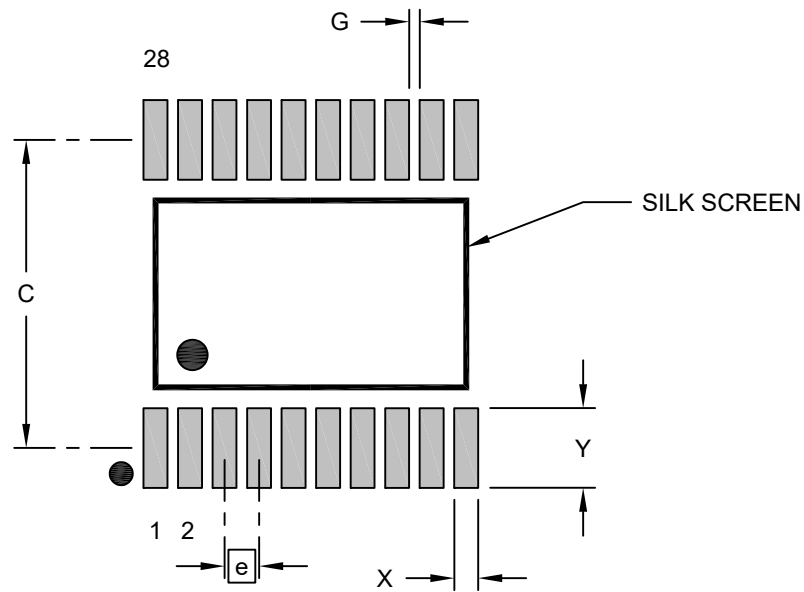

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Spacing	C		5.94	
Contact Pad Width (X20)	X			0.42
Contact Pad Length (X20)	Y			1.78
Contact Pad to Contact Pad (X18)	G	0.20		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.