



206-Ball Thin Fine Pitch Ball Grid Array (AGA) - 12x12x1.2 mm Body [TFBGA] Internal Flip chip

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

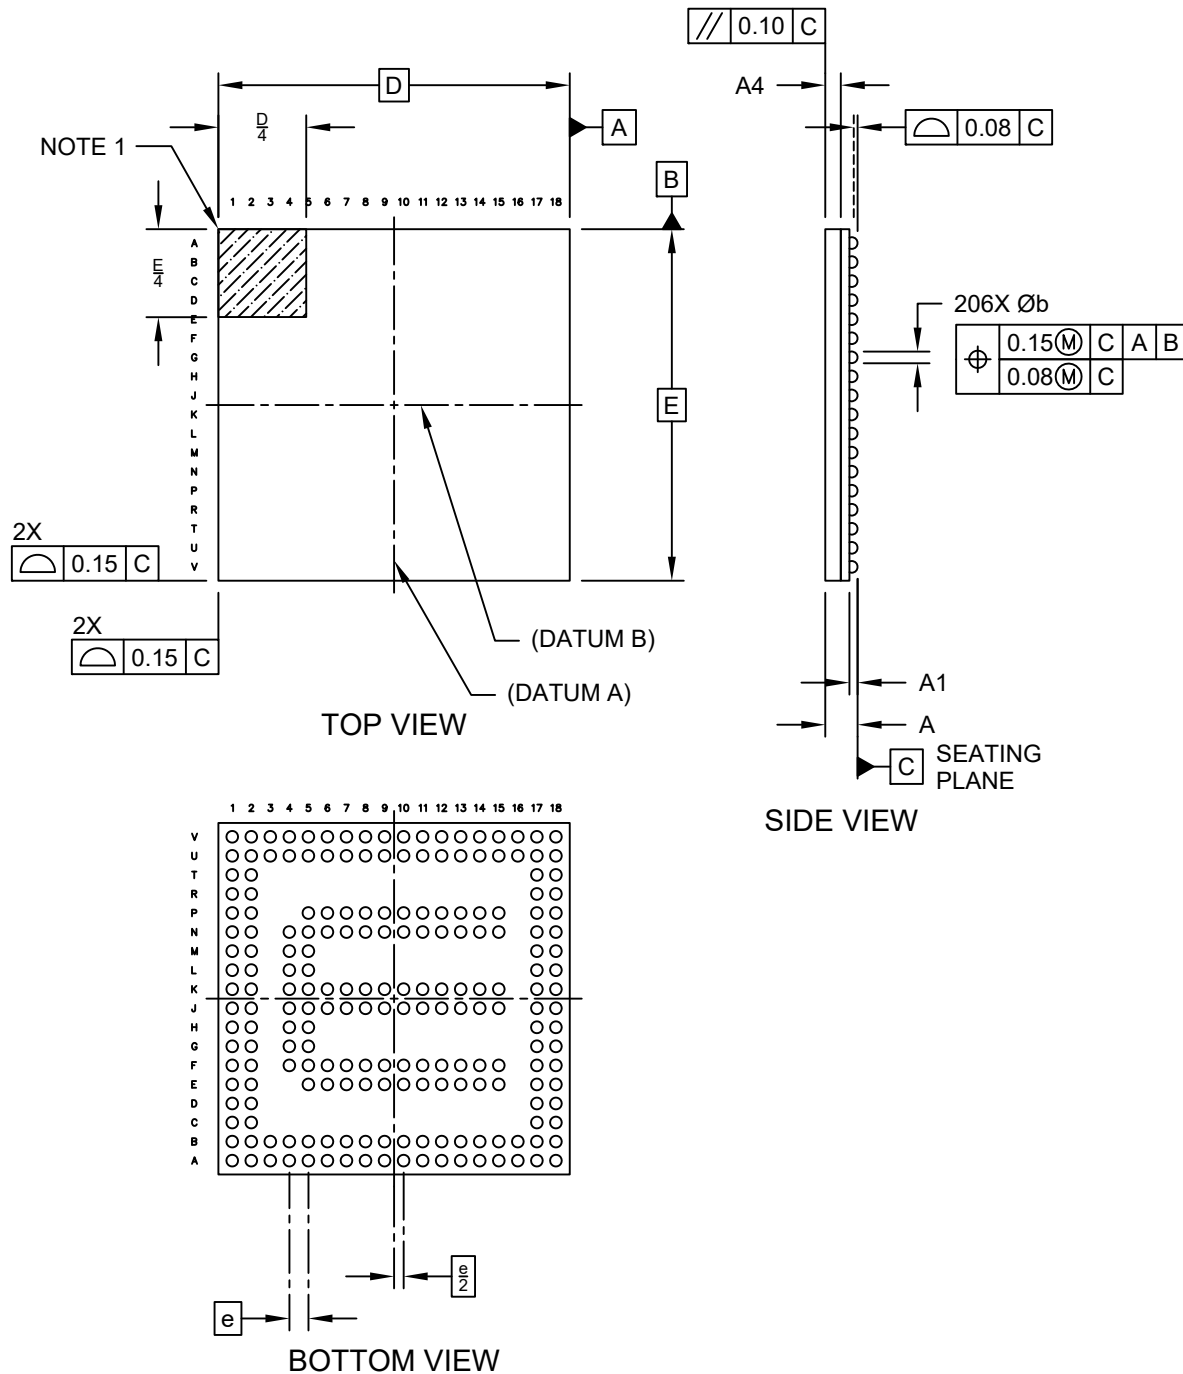

206-Ball Thin Fine Pitch Ball Grid Array (AGA) - 12x12x1.2 mm Body [TFBGA] Internal Flip chip

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

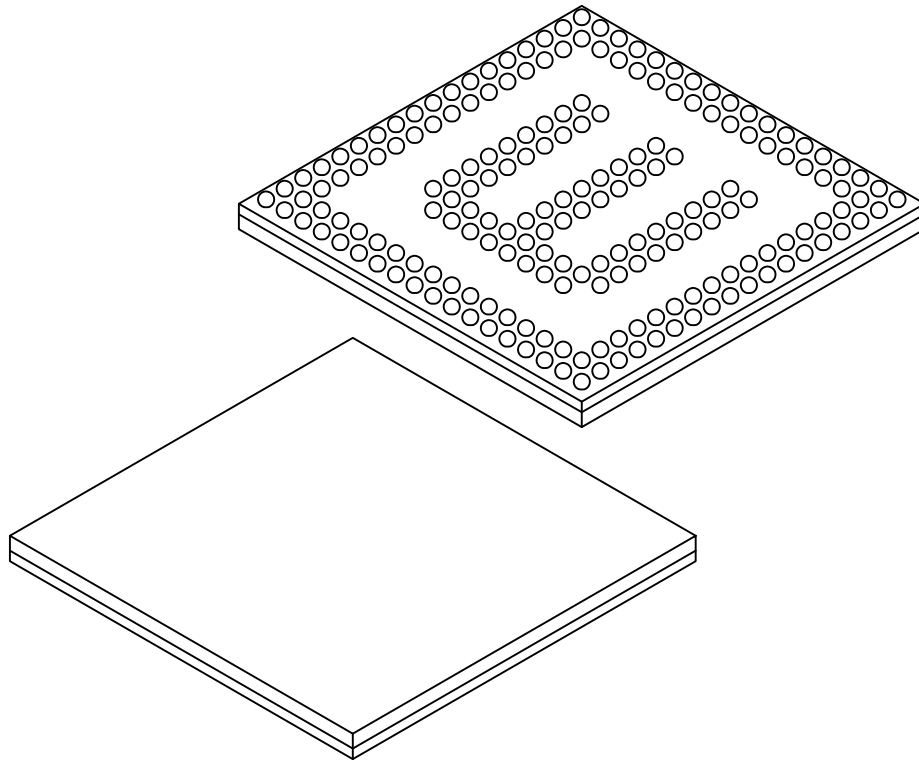

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	206		
Pitch	e	0.65 BSC		
Overall Height	A	-	-	1.20
Ball Height	A1	0.27	-	0.37
Mold Cap Thickness	A4	0.53 REF		
Overall Length	D	12.00 BSC		
Overall Width	E	12.00 BSC		
Terminal Width	b	0.35	0.40	0.45

Notes:


1. Terminal A1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

206-Ball Thin Fine Pitch Ball Grid Array (AGA) - 12x12x1.2 mm Body [TFBGA] Internal Flip chip

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

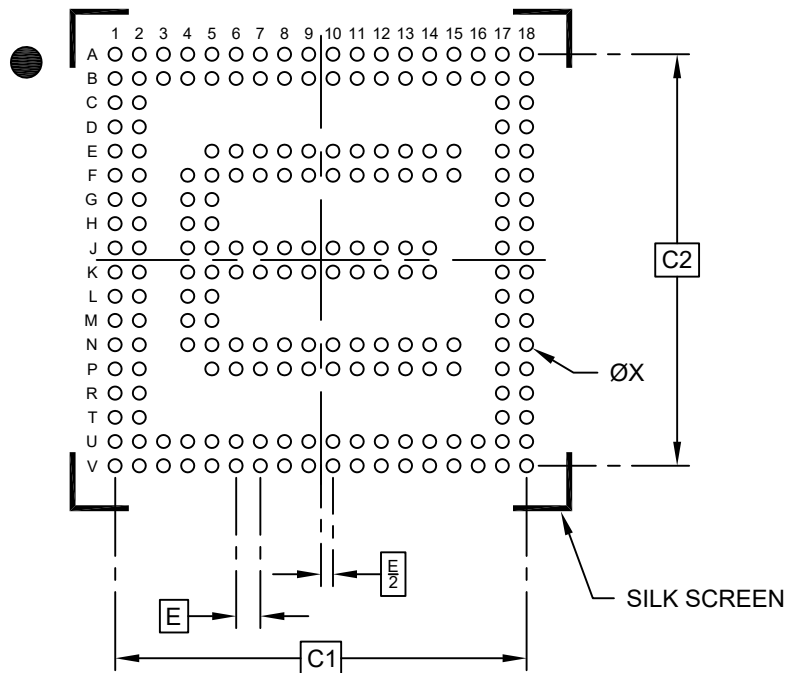

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Spacing	C1	11.05 BSC		
Contact Pad Spacing	C2	11.05 BSC		
Contact Pad Diameter (X206)	ØX		0.35	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.