



40-Lead Very Thin Quad Flat, No Lead Package (NPA) – 5.0x6.5 mm body [VQFN] With Dimpled Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

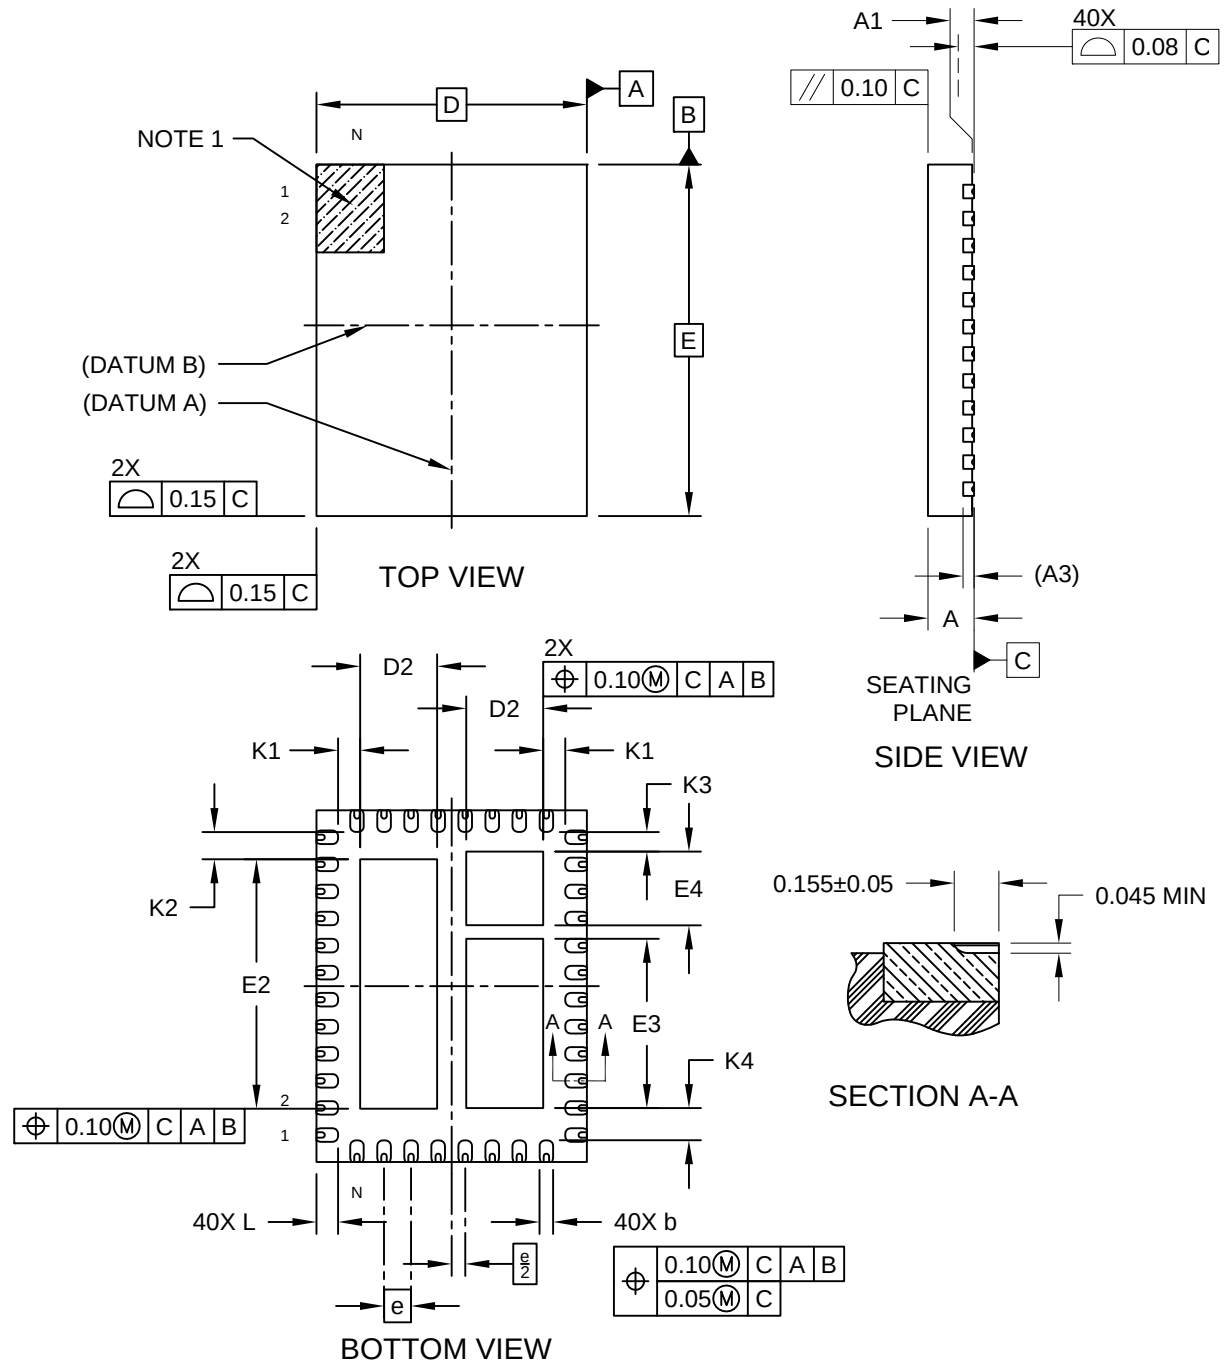

40-Lead Very Thin Quad Flat, No Lead Package (NPA) – 5.0x6.5 mm body [VQFN] With Dimpled Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

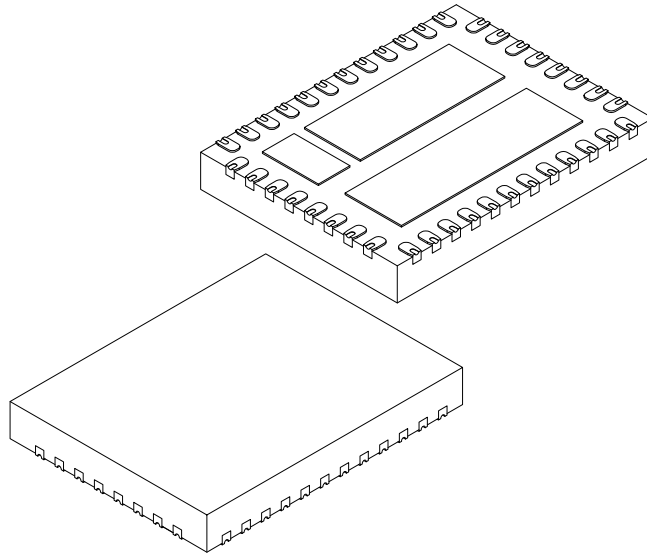


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	40		
Pitch	e	0.50 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.203 REF		
Overall Length	D	5.00 BSC		
Exposed Pad Length	D2	1.32	1.42	1.52
Overall Width	E	6.50 BSC		
Exposed Pad Width	E2	4.51	4.61	4.71
Exposed Pad Width	E3	3.03	3.13	3.23
Exposed Pad Width	E4	1.26	1.36	1.46
Terminal Width	b	0.18	0.25	0.30
Terminal Length	L	0.30	0.40	0.50
Terminal-to-Exposed-Pad	K1	-	0.409	-
Terminal-to-Exposed-Pad	K2	-	0.505	-
Terminal-to-Exposed-Pad	K3	-	0.363	-
Terminal-to-Exposed-Pad	K4	-	0.595	-

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

40-Lead Very Thin Quad Flat, No Lead Package (NPA) – 5.0x6.5 mm body [VQFN] With Dimpled Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

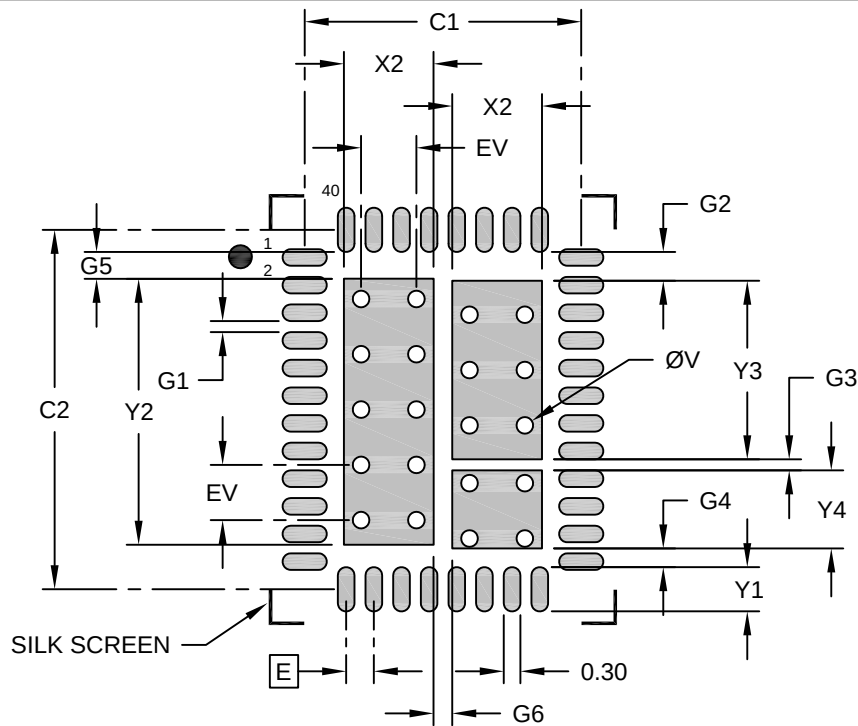

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Contact Pad Width (X40)	X1			0.30
Contact Pad Length (X40)	Y1			0.80
Contact Pad Spacing	C1		5.00	
Contact Pad Spacing	C2		6.50	
Exposed Pad Width (X3)	X2			1.62
Exposed Pad Length	Y2			4.81
Exposed Pad Length	Y3			3.23
Exposed Pad Length	Y4			1.41
Pad to Pad	G1	0.20		
Pad to Pad	G2	0.52		
Pad to Pad	G3	0.20		
Pad to Pad	G4	0.34		
Pad to Pad	G5	0.48		
Pad to Pad	G6	0.34		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

40-Lead Very Thin Quad Flat, No Lead Package (NPA) – 5.0x6.5 mm body [VQFN]
With Dimpled Wettable Flanks

PACKAGE - LAND PATTERN OVERLAY (NOT FOR PUBLICATION)

