



8-Lead Very Thin Plastic Dual Flat, No Lead Package (JEA) - 3x2 mm Body [VDFN] With Dimpled Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

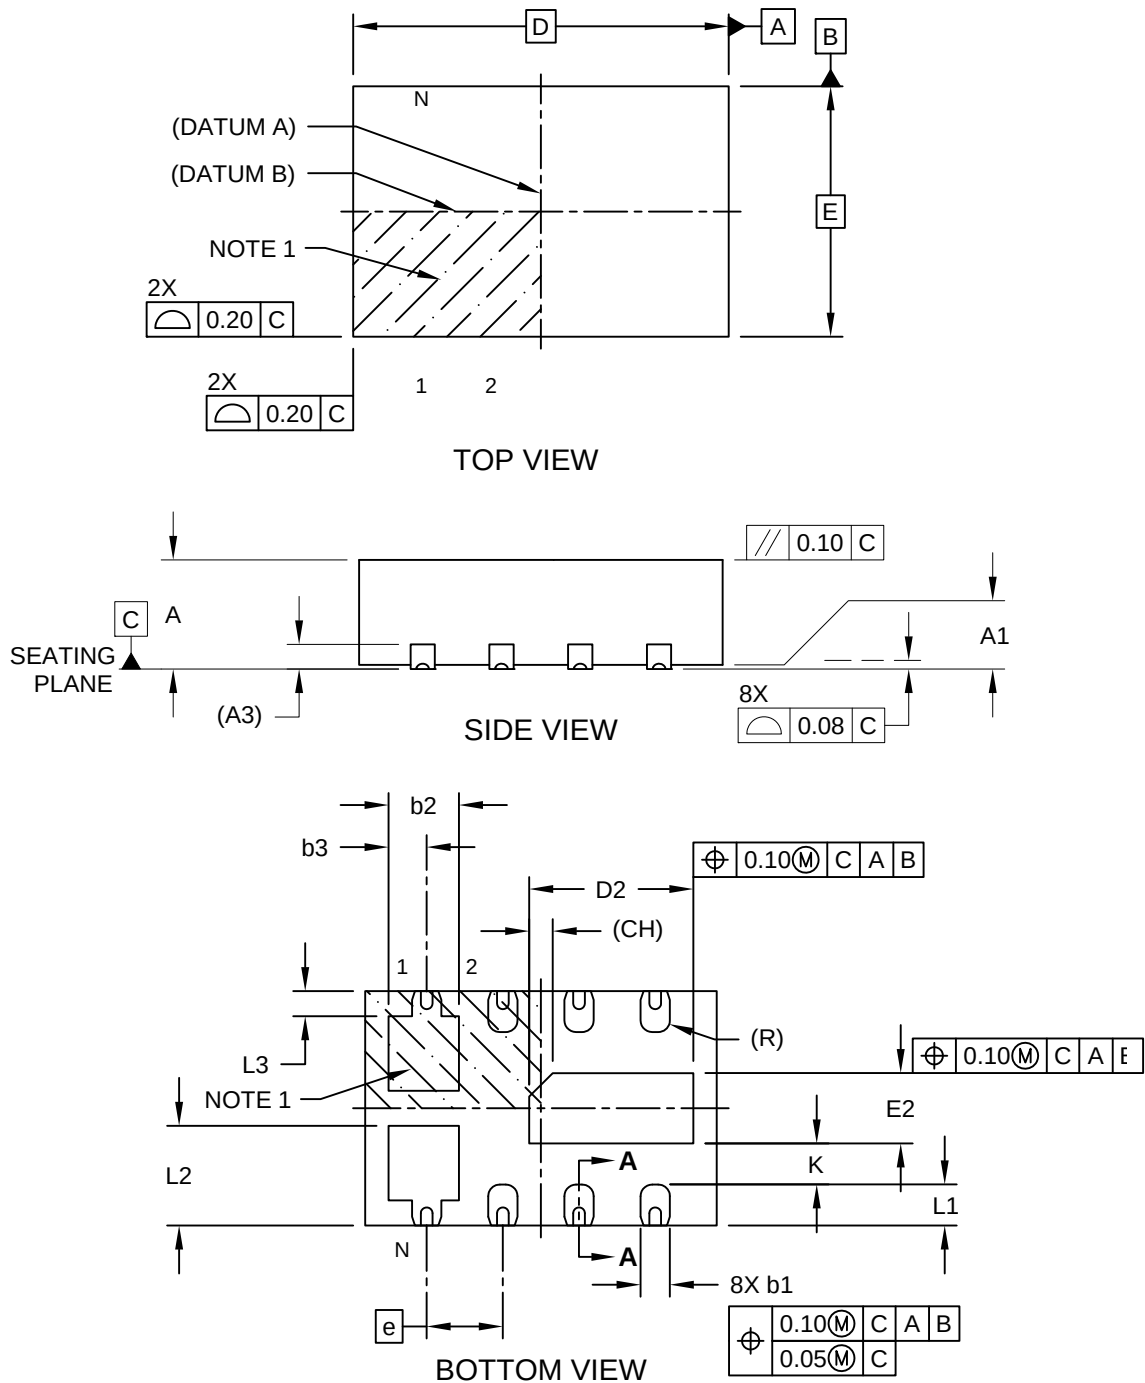

8-Lead Very Thin Plastic Dual Flat, No Lead Package (JEA) - 3x2 mm Body [VDFN] With Dimpled Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

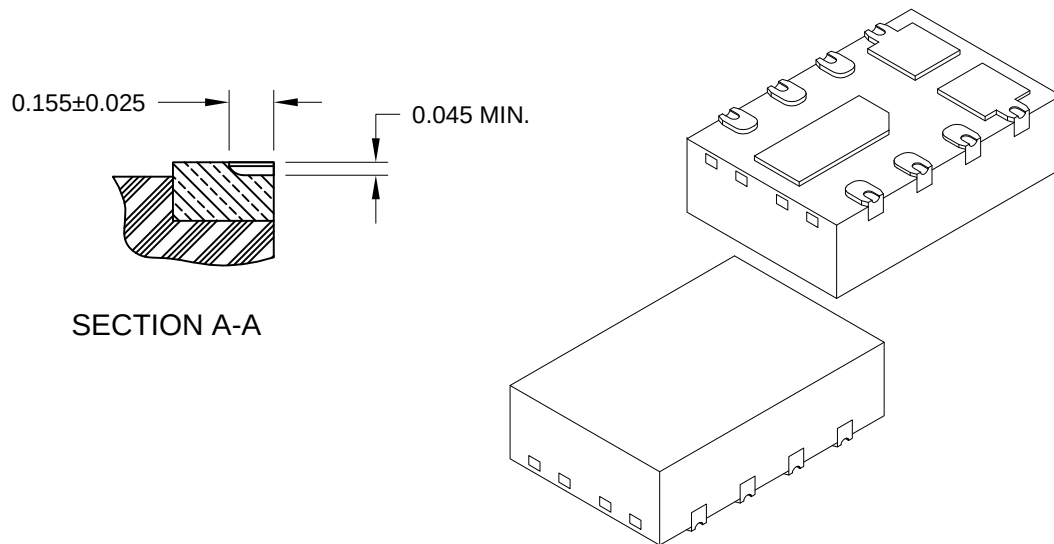


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	8		
Pitch	e	0.65 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.20 REF		
Overall Length	D	3.00 BSC		
Exposed Pad Length	D2	0.50	0.60	0.70
Overall Width	E	2.00 BSC		
Exposed Pad Width	E2	1.30	1.40	1.50
Exposed Pad Chamfer	CH	0.20 REF		
Terminal Width	b1	0.18	0.25	0.30
Terminal Width	b2	-	-	0.60
Terminal Offset	b3	0.23	0.28	0.33
Terminal Length	L1	0.25	0.35	0.45
Terminal Length	L2	0.75	0.85	0.95
Terminal Length	L3	0.17	0.22	0.27
Terminal-to-Exposed-Pad	K	0.20	-	-
Terminal Radius	R	0.10 REF		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

8-Lead Very Thin Plastic Dual Flat, No Lead Package (JEA) - 3x2 mm Body [VDFN] With Dimpled Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

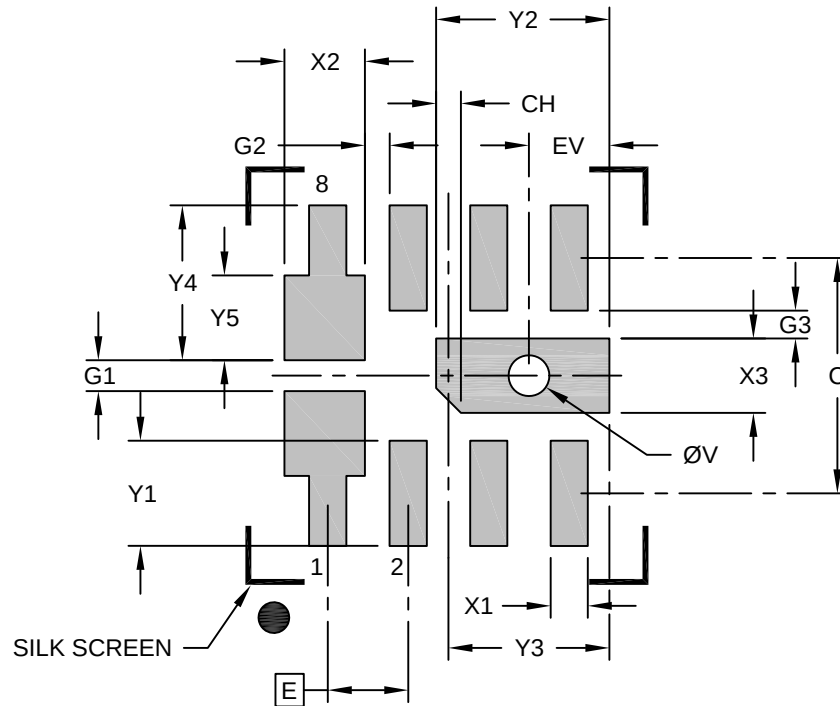

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Width (X8)	X1			0.30
Contact Pad Length (X6)	Y1			0.85
Contact Pad Width (X2)	X2			0.65
Contact Pad Length (X2)	Y4			1.25
Contact Pad Length (X2)	Y5			0.68
Center Pad Width	X3			0.60
Center Pad Length	Y2			1.40
Center Pad Offset	Y3		1.30	
Center Pad Chamfer	CH		0.20	
Contact Pad Spacing	C		1.90	
Terminal Pad to Terminal Pad	G1	0.25		
Terminal Pad to Terminal Pad	G2	0.20		
Terminal Pad to Center Pad	G3	0.23		
Thermal Via Diameter	V		0.33	
Thermal Via Offset	EV		0.65	

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process