


24-Lead Very Thin Plastic Quad Flat, No Lead Package (NVA) - 3x4 mm Body [VQFN] With Multiple Exposed Pads and Wettable Flanks


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

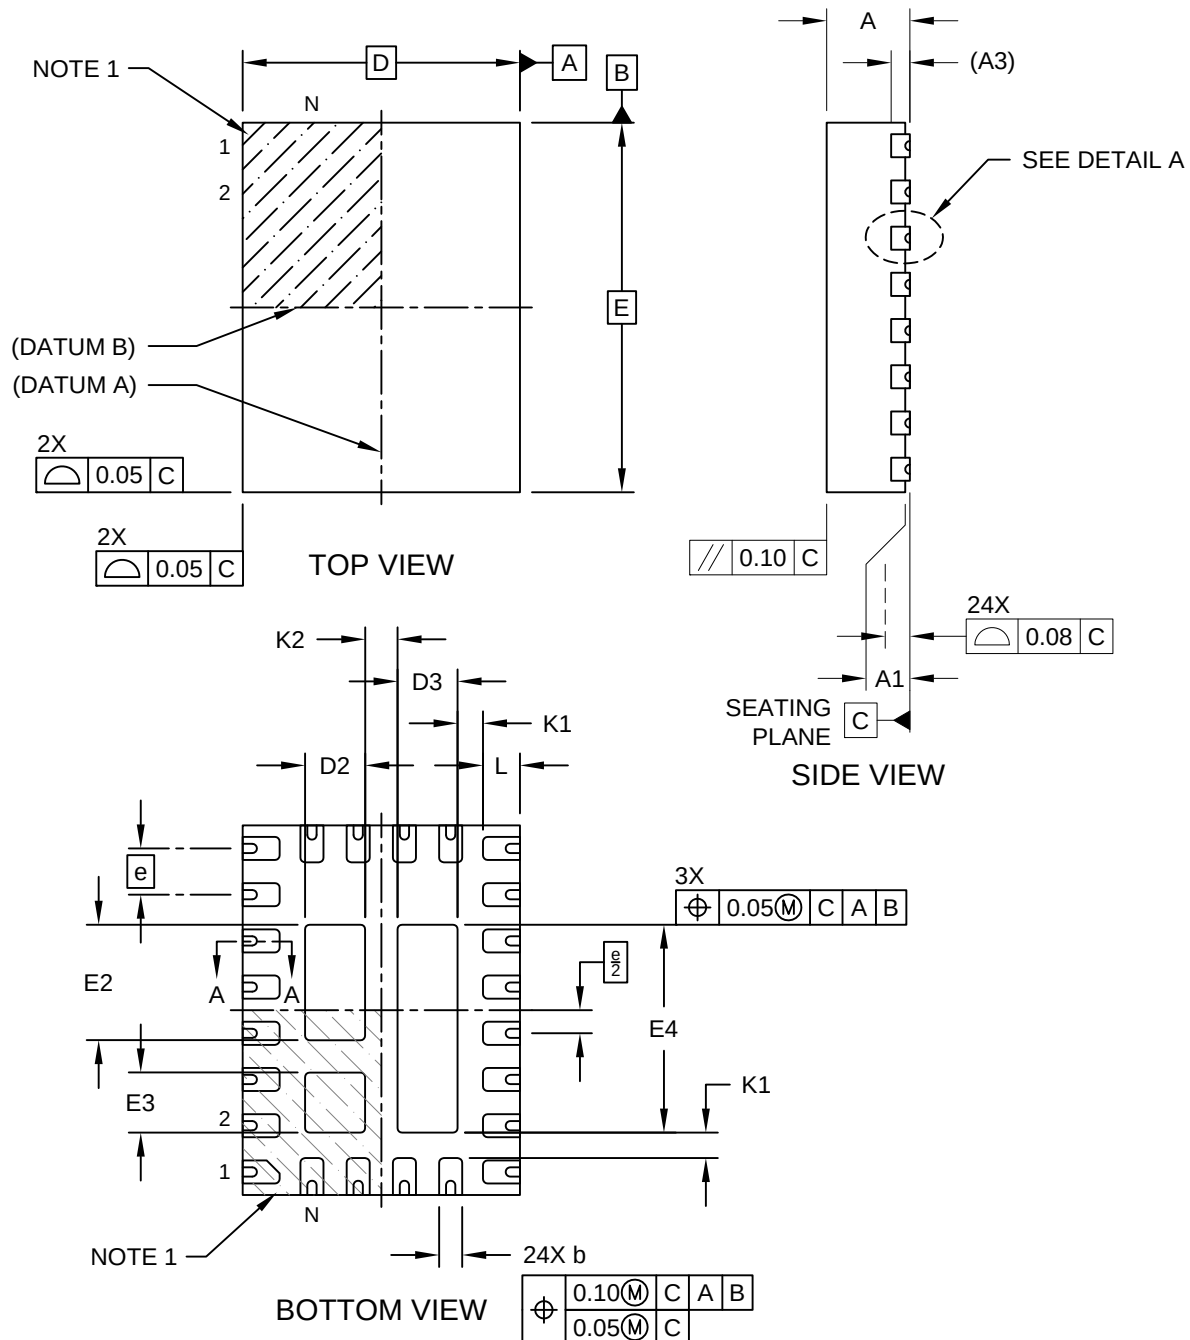

24-Lead Very Thin Plastic Quad Flat, No Lead Package (NVA) - 3x4 mm Body [VQFN]

With Multiple Exposed Pads and Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

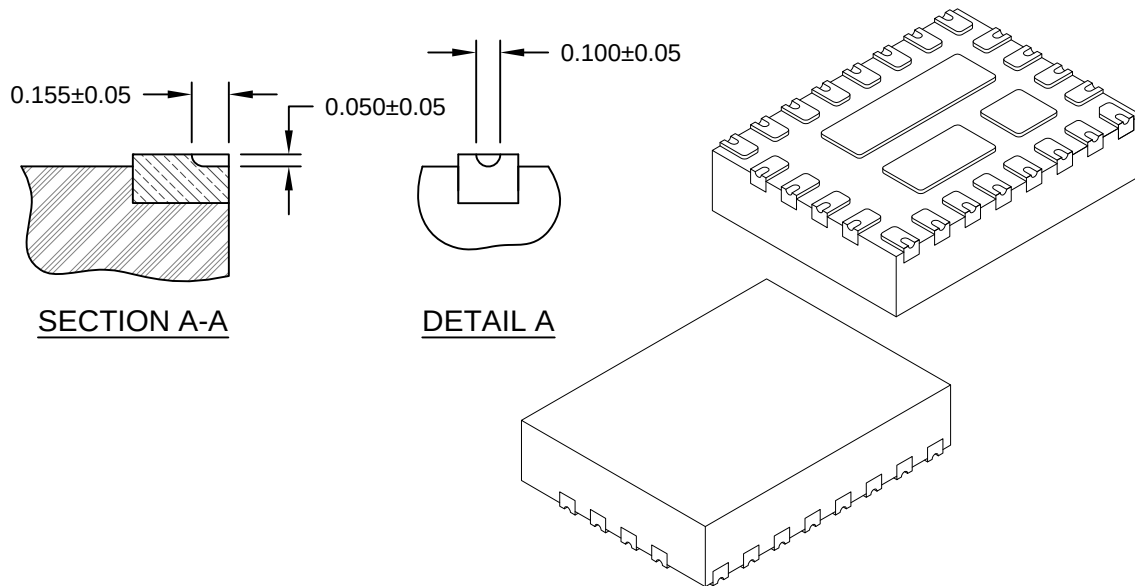


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	24		
Pitch	e	0.50 BSC		
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3	0.203 REF		
Overall Length	D	3.00 BSC		
Exposed Pad Width	D2	0.60	0.65	0.70
Exposed Pad Width	D3	0.60	0.65	0.70
Overall Width	E	4.00 BSC		
Exposed Pad Length	E2	1.15	1.25	1.35
Exposed Pad Length	E3	0.55	0.65	0.75
Exposed Pad Length	E4	1.75	2.25	2.75
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.30	0.40	0.45
Terminal-to-Exposed-Pad	K1	0.20	-	-
Terminal-to-Exposed-Pad	K2	0.30	-	-

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

24-Lead Very Thin Plastic Quad Flat, No Lead Package (NVA) - 3x4 mm Body [VQFN] With Multiple Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

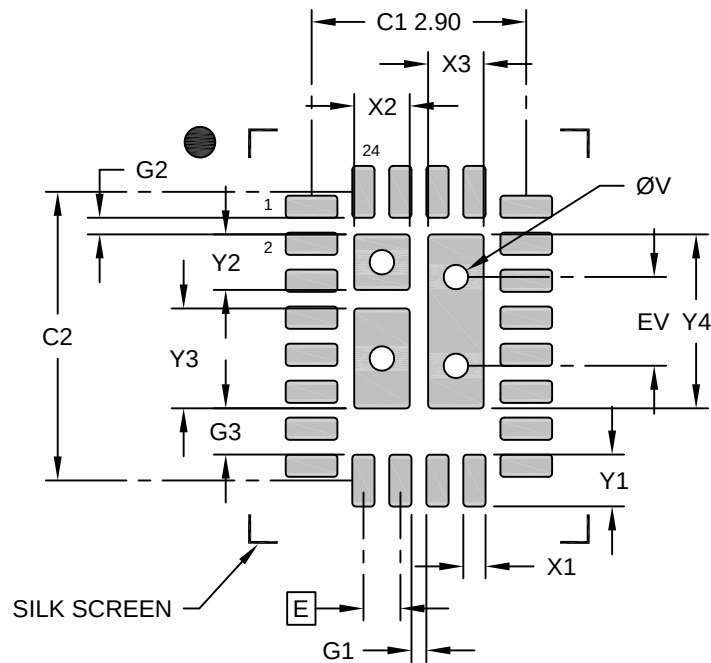

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		0.50 BSC	
Contact Pad Spacing	C1		2.90	
Contact Pad Spacing	C2		3.90	
Contact Pad Width (X24)	X1			0.30
Contact Pad Length (X24)	Y1			0.70
Center Pad Width	X2			0.75
Center Pad Width (X2)	X3			0.75
Center Pad Length	Y2			0.75
Center Pad Length	Y3			1.35
Center Pad Length	Y4			2.35
Contact Pad to Center Pad (X24)	G1	0.20		
Contact Pad to Center Pad (X4)	G2	0.23		
Contact Pad to Center Pad (X4)	G3	0.63		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process