



6-Lead Very Thin Land Grid Array (ALA) - 3.2x2.5 mm Body [VLGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

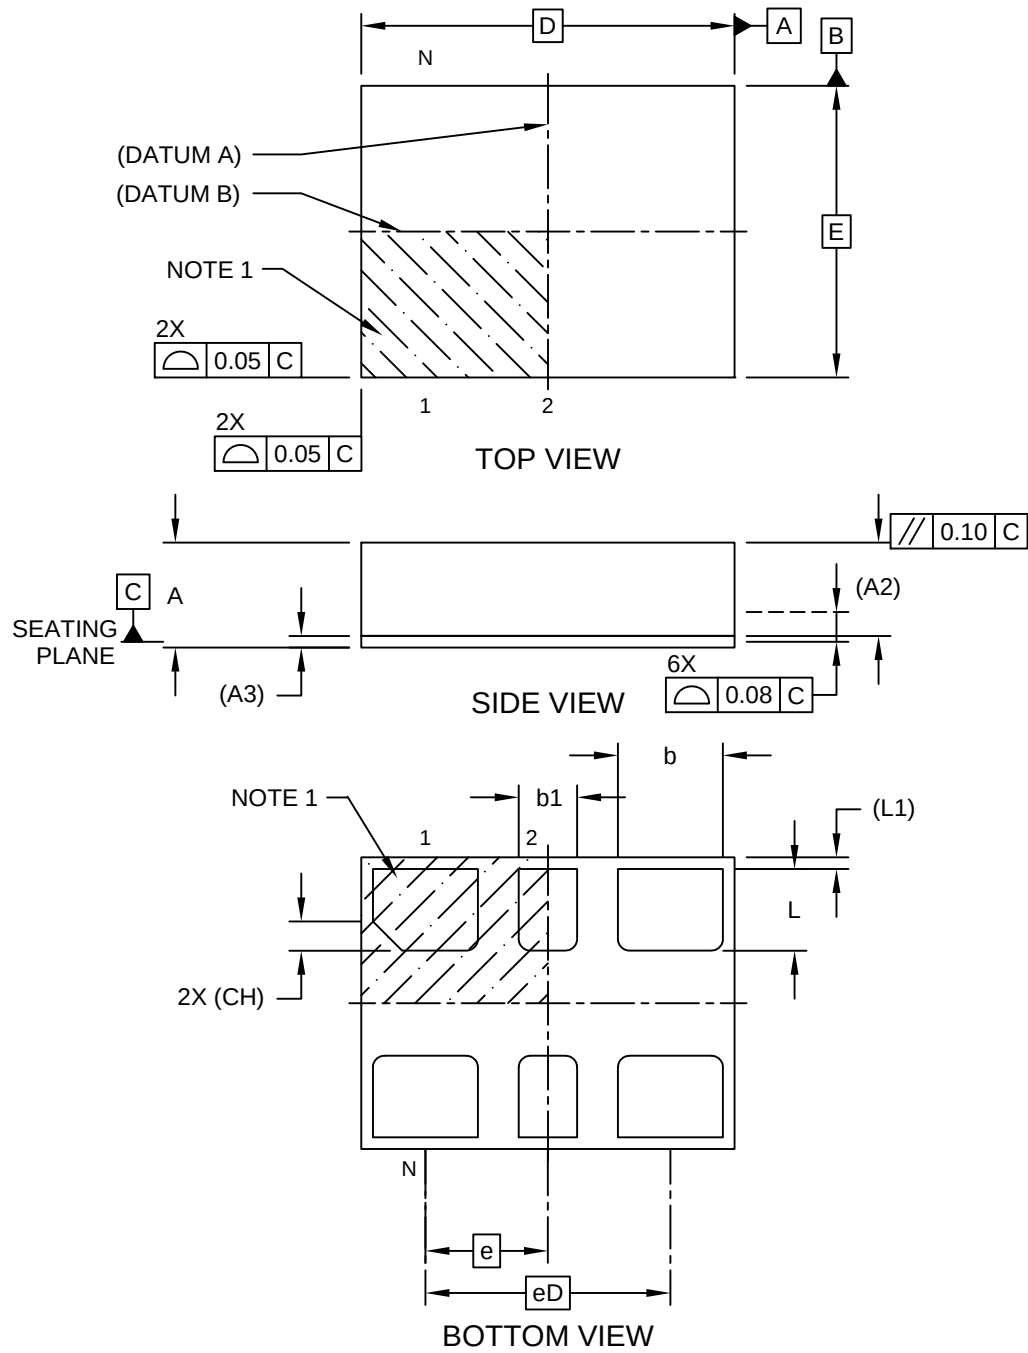

6-Lead Very Thin Land Grid Array (ALA) - 3.2x2.5 mm Body [VLGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

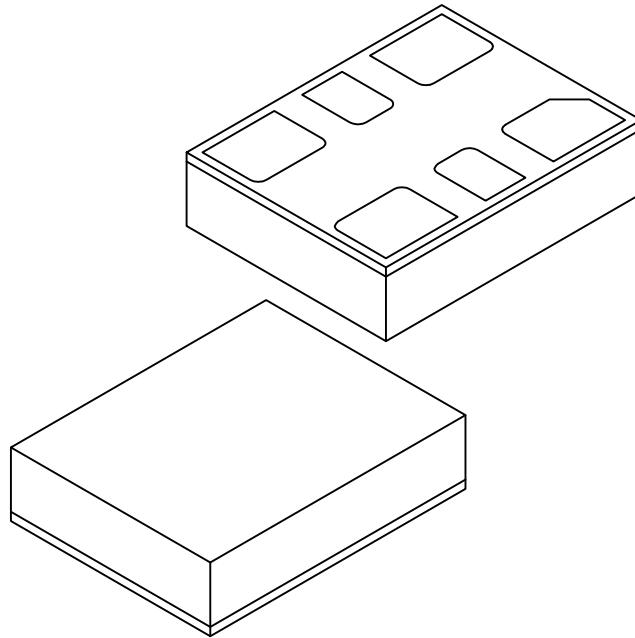


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		6		
Pitch	e		1.05 BSC		
Overall Pitch	eD		2.10 BSC		
Overall Height	A		0.70	0.80	0.90
Molded Cap Height	A2		0.70 REF		
Substrate Thickness	A3		0.10 REF		
Overall Length	D		3.20 BSC		
Overall Width	E		2.50 BSC		
Terminal Width	b		0.85	0.90	0.95
Terminal Width	b1		0.45	0.50	0.55
Terminal Length	L		0.65	0.70	0.75
Terminal Pullback	L1		0.10 REF		
Terminal 1 Corner Chamfer	CH		0.25 REF		

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

6-Lead Very Thin Land Grid Array (ALA) - 3.2x2.5 mm Body [VLGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

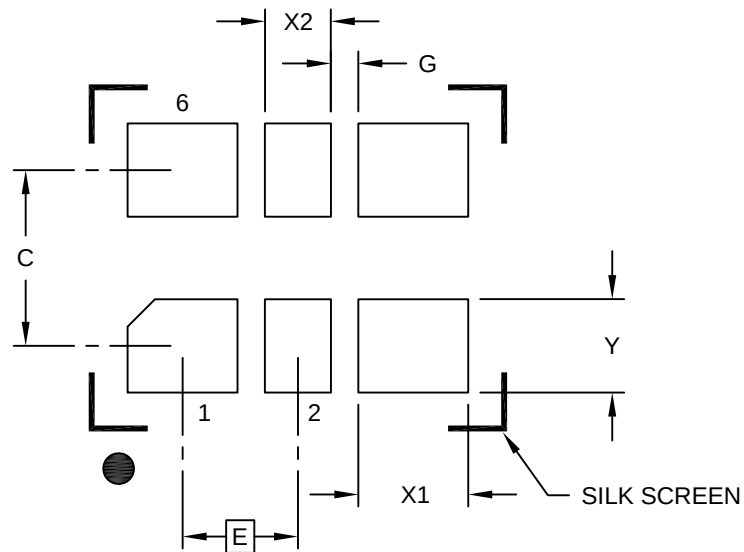

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.05 BSC		
Contact Pad Spacing	C		1.60	
Contact Pad Width (X4)	X1			1.00
Contact Pad Width (X2)	X2			0.60
Contact Pad Length (X6)	Y			0.85
Space Between Contacts (X4)	G1	0.25		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.