



# 121-Ball Thin, Fine Pitch Ball Grid Array (AJA) - 10x10 mm Body [TFBGA]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

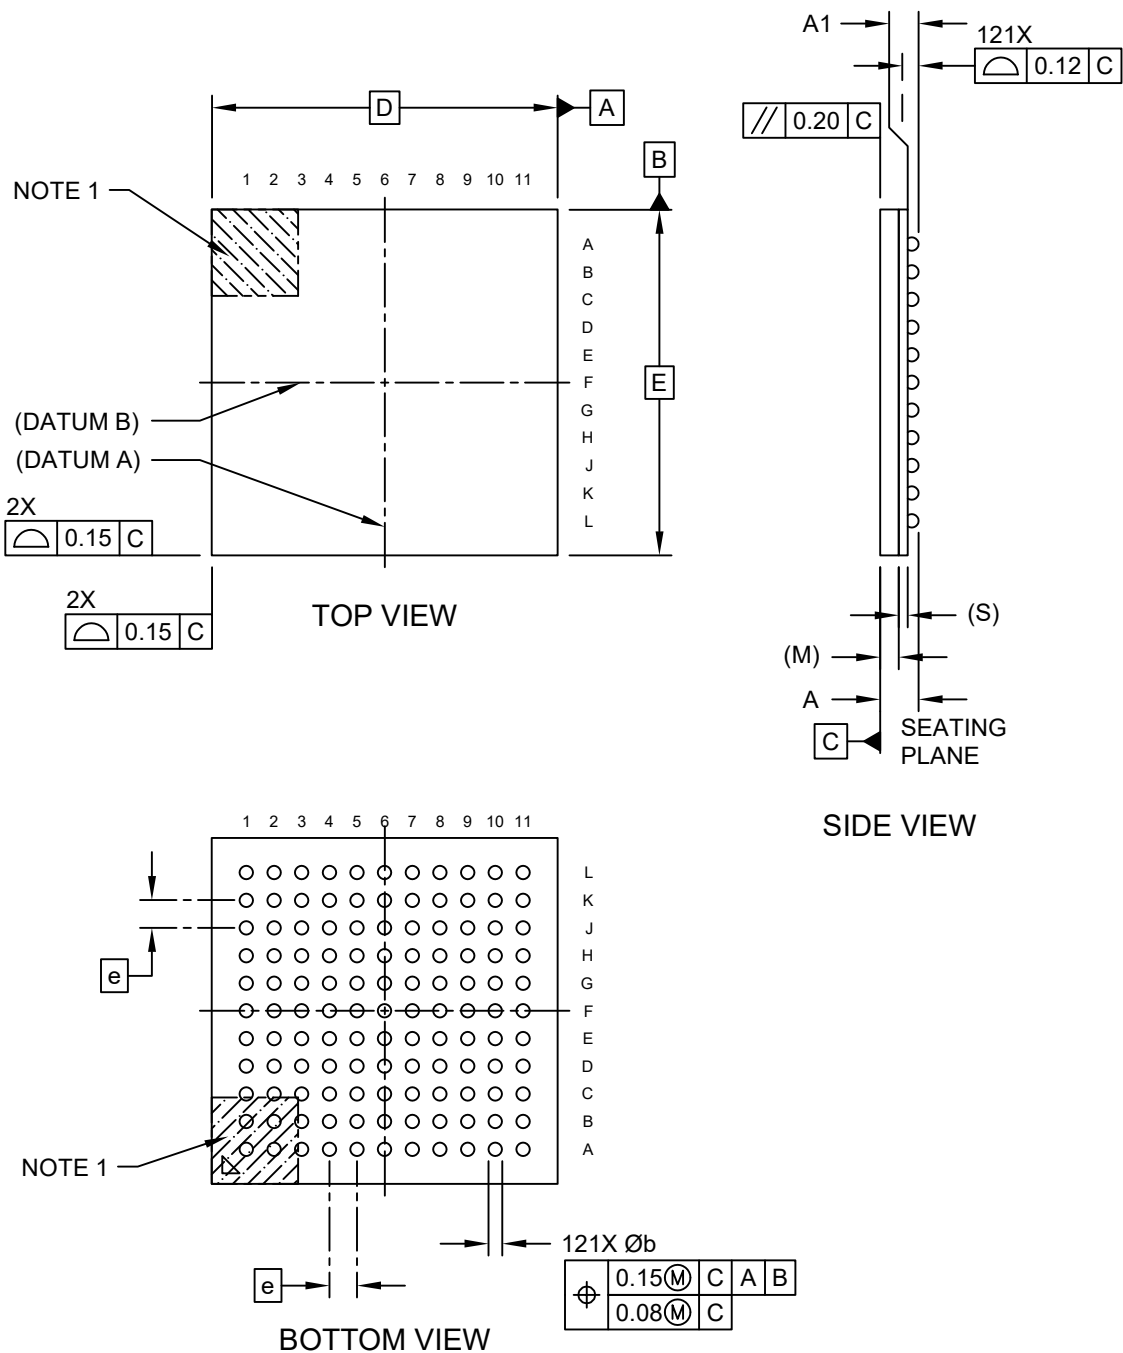

## 121-Ball Thin, Fine Pitch Ball Grid Array (AJA) - 10x10 mm Body [TFBGA]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

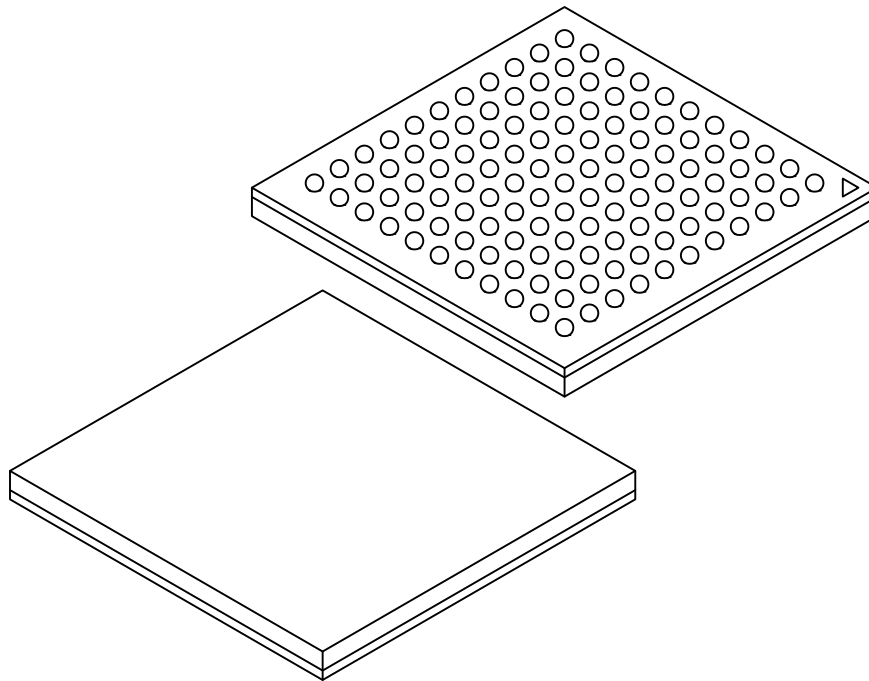

| Units                  |    | MILLIMETERS |     |      |
|------------------------|----|-------------|-----|------|
| Dimension Limits       |    | MIN         | NOM | MAX  |
| Number of Terminals    | N  | 121         |     |      |
| Pitch                  | e  | 0.80 BSC    |     |      |
| Overall Height         | A  | –           | –   | 1.20 |
| Terminal (ball) height | A1 | 0.270       | –   | 0.37 |
| Substrate Thickness    | S  | 0.26 REF    |     |      |
| Mold Cap Thickness     | M  | 0.53 REF    |     |      |
| Overall Length         | D  | 10.00 BSC   |     |      |
| Overall Width          | E  | 10.00 BSC   |     |      |
| Terminal Width         | b  | 0.38        | –   | 0.48 |

**Notes:**


1. Terminal A1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

## 121-Ball Thin, Fine Pitch Ball Grid Array (AJA) - 10x10 mm Body [TFBGA]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

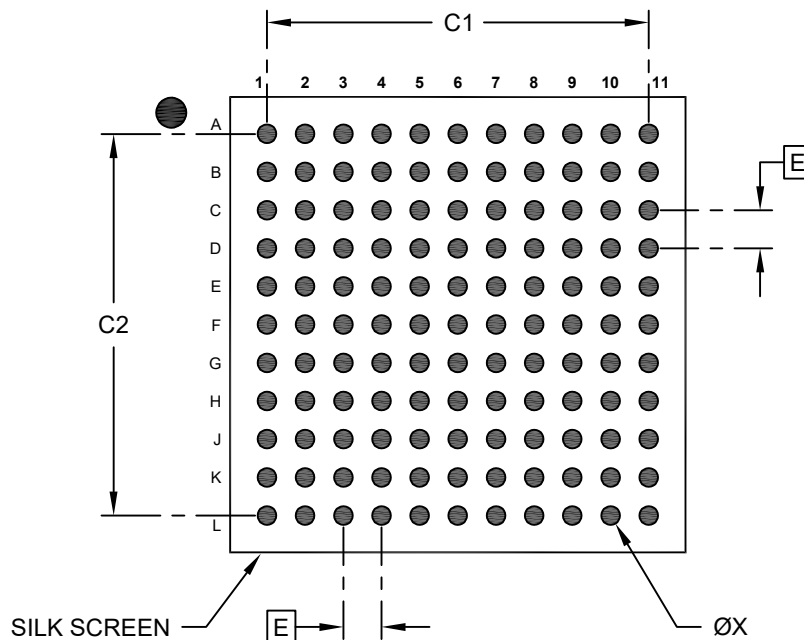

### RECOMMENDED LAND PATTERN

| Units                       |    | MILLIMETERS |      |      |
|-----------------------------|----|-------------|------|------|
| Dimension Limits            |    | MIN         | NOM  | MAX  |
| Contact Pitch               | E  | 0.80 BSC    |      |      |
| Contact Pad Spacing         | C1 |             | 8.00 |      |
| Contact Pad Spacing         | C2 |             | 8.00 |      |
| Contact Pad Diameter (X121) | X  |             |      | 0.40 |

#### Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.