



## 6-Lead Very Thin Dual Flatpack, No Lead Package (HPA) - 7x5 mm Body [VDFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

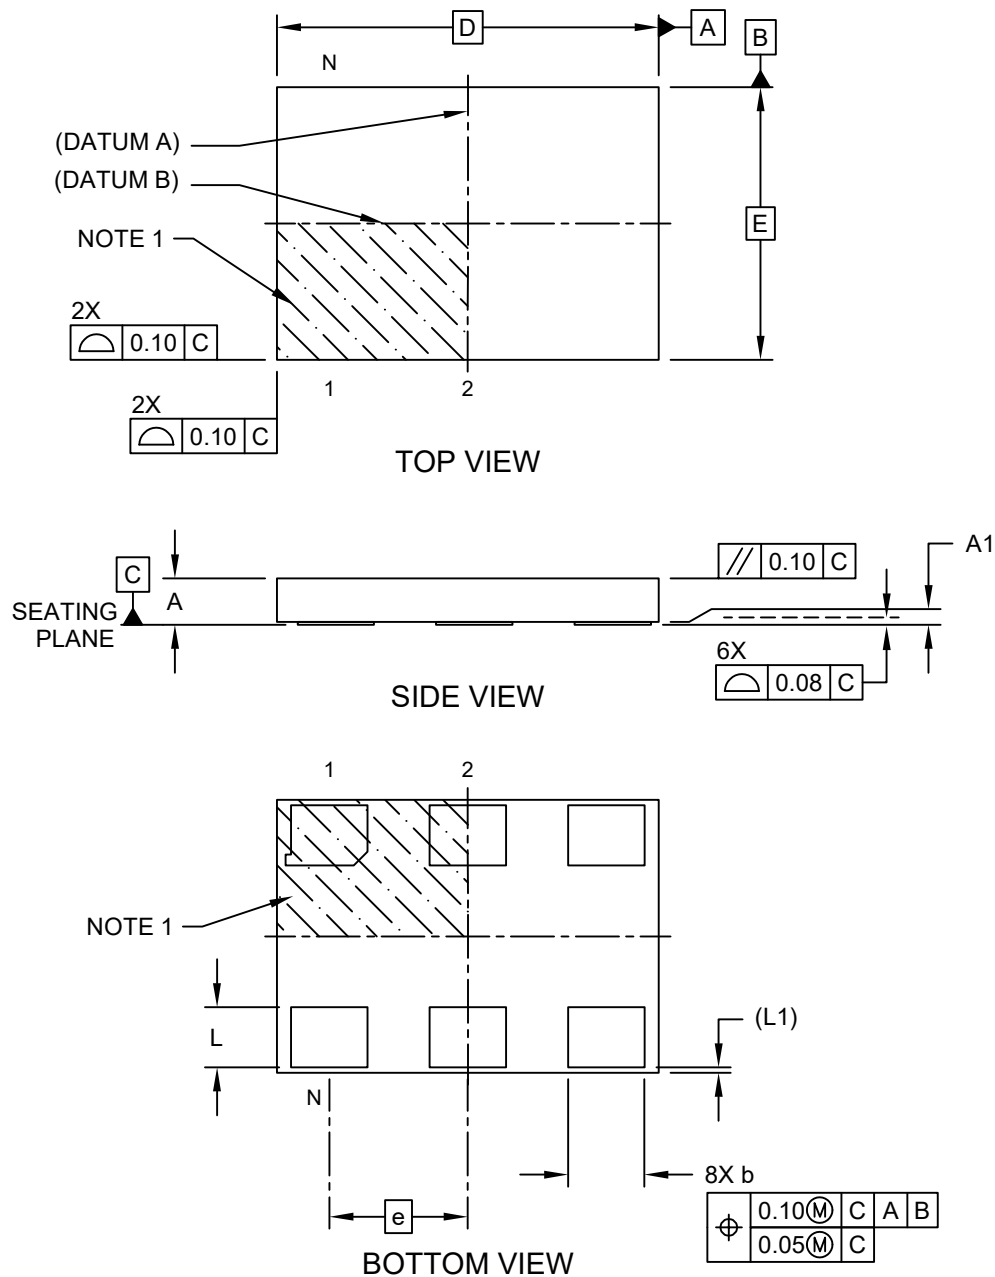

## 6-Lead Very Thin Dual Flatpack, No Lead Package (HPA) - 7x5 mm Body [VDFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

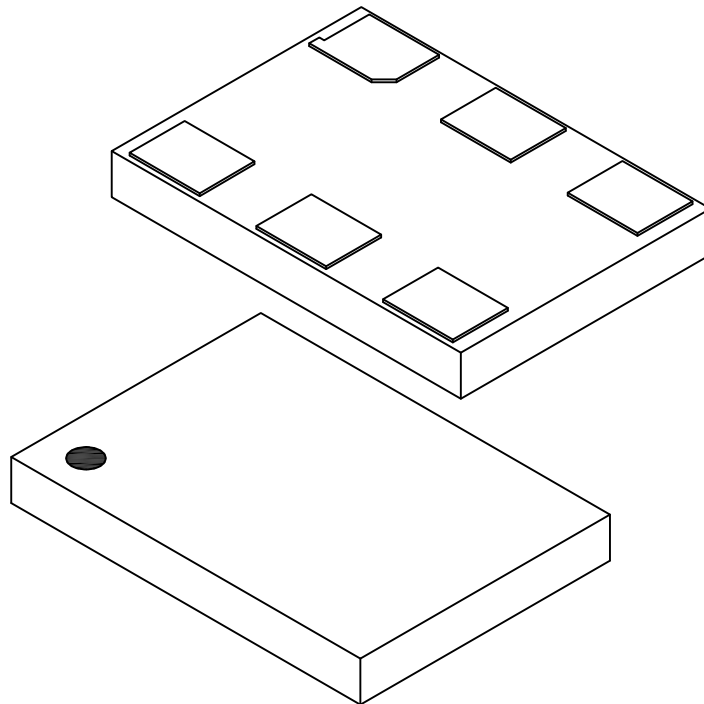


| Units               |    | MILLIMETERS |      |      |
|---------------------|----|-------------|------|------|
| Dimension Limits    |    | MIN         | NOM  | MAX  |
| Number of Terminals | N  | 6           |      |      |
| Pitch               | e  | 2.54 BSC    |      |      |
| Overall Height      | A  | 0.80        | 0.85 | 0.90 |
| Standoff            | A1 | 0.00        | 0.02 | 0.05 |
| Overall Length      | D  | 7.00 BSC    |      |      |
| Overall Width       | E  | 5.00 BSC    |      |      |
| Terminal Width      | b  | 1.30        | 1.40 | 1.50 |
| Terminal Length     | L  | 1.00        | 1.10 | 1.20 |
| Pullback            | L1 | 0.10 REF    |      |      |

### Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
  - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
  - REF: Reference Dimension, usually without tolerance, for information purposes only.

## 6-Lead Very Thin Dual Flatpack, No Lead Package (HPA) - 7x5 mm Body [VDFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

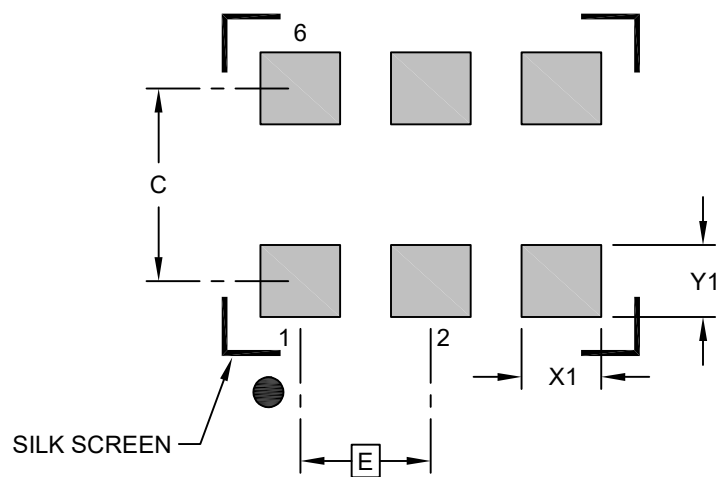

### RECOMMENDED LAND PATTERN

| Units                   |    | MILLIMETERS |      |      |
|-------------------------|----|-------------|------|------|
| Dimension Limits        |    | MIN         | NOM  | MAX  |
| Contact Pitch           | E  | 2.54 BSC    |      |      |
| Contact Pad Spacing     | C  |             | 3.90 |      |
| Contact Pad Width (X6)  | X1 |             |      | 1.55 |
| Contact Pad Length (X6) | Y1 |             |      | 1.40 |

#### Notes:

- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3227 Rev A