


Packaging Diagrams and Parameters

16-Lead Ultra-Thin Quad Flatpack No-Leads (MKA) 2.5x2.5x0.6mm [UQFN]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

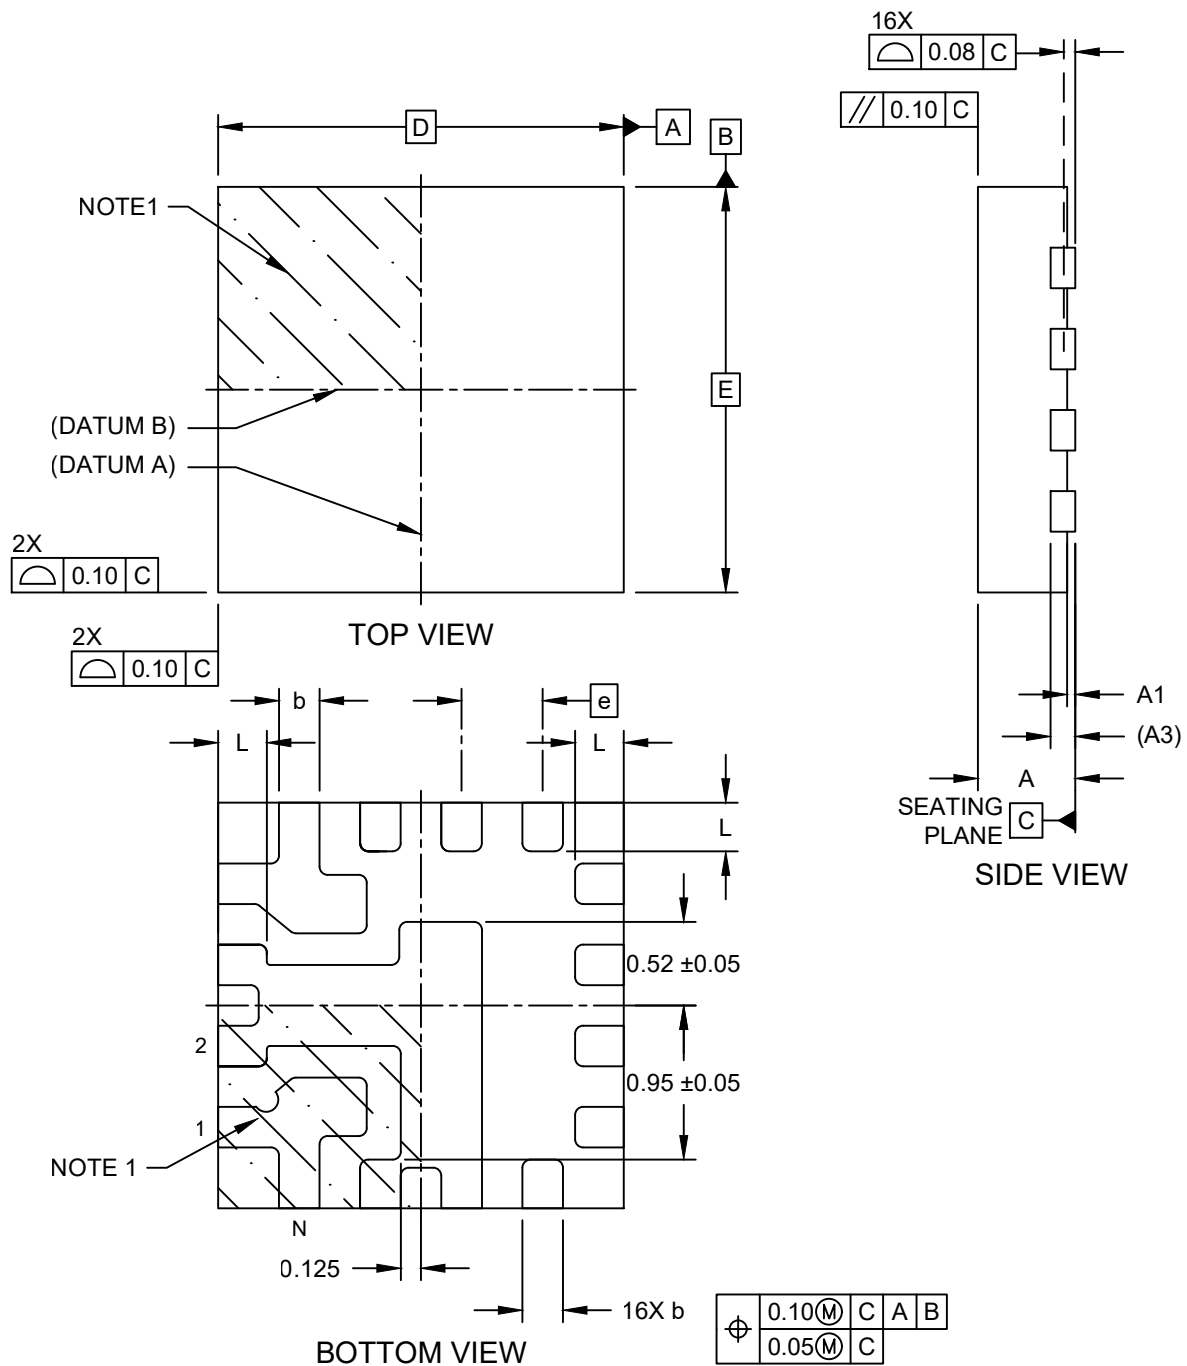

Packaging Diagrams and Parameters

16-Lead Ultra-Thin Quad Flatpack No-Leads (MKA) 2.5x2.5x0.6mm [UQFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

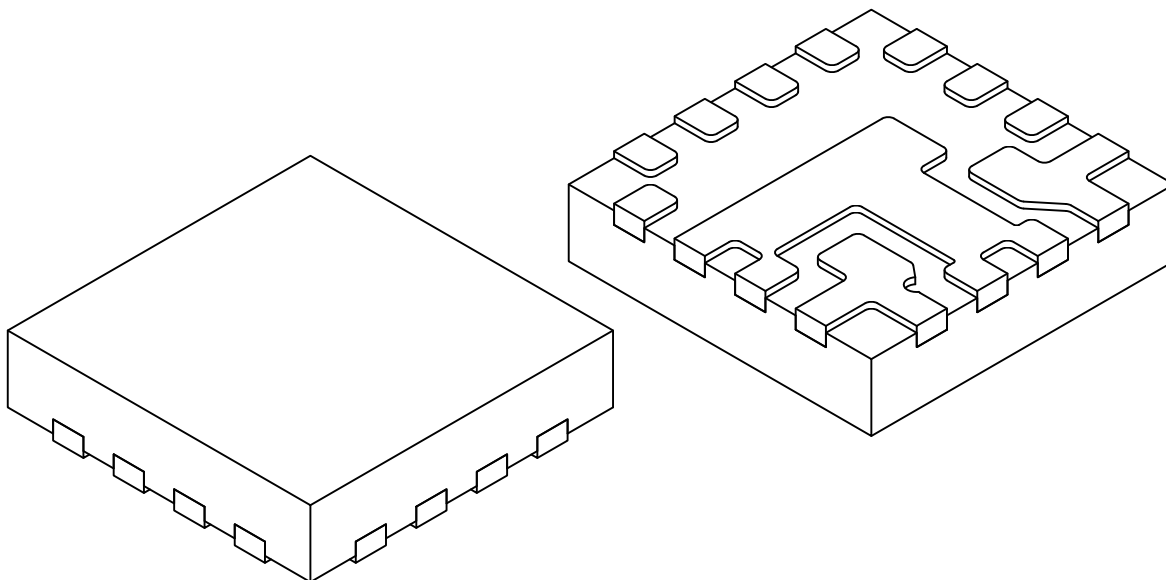

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		16		
Pitch	e		0.50 BSC		
Overall Height	A		0.50	0.55	0.60
Standoff	A1		0.00	-	0.05
Terminal Thickness	A3		0.152 REF		
Overall Length	D		2.50 BSC		
Overall Width	E		2.50 BSC		
Terminal Width	b		0.20	0.25	0.30
Terminal Length	L		0.25	0.30	0.35

Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
REF: Reference Dimension, usually without tolerances, is for information purposes only.

