



28-Lead Very Thin Plastic Quad Flat, No Lead Package (QEA) - 5x6 mm Body [VQFN] **With Multiple Exposed Pads, Fused Terminals and Stepped Wettable Flanks**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

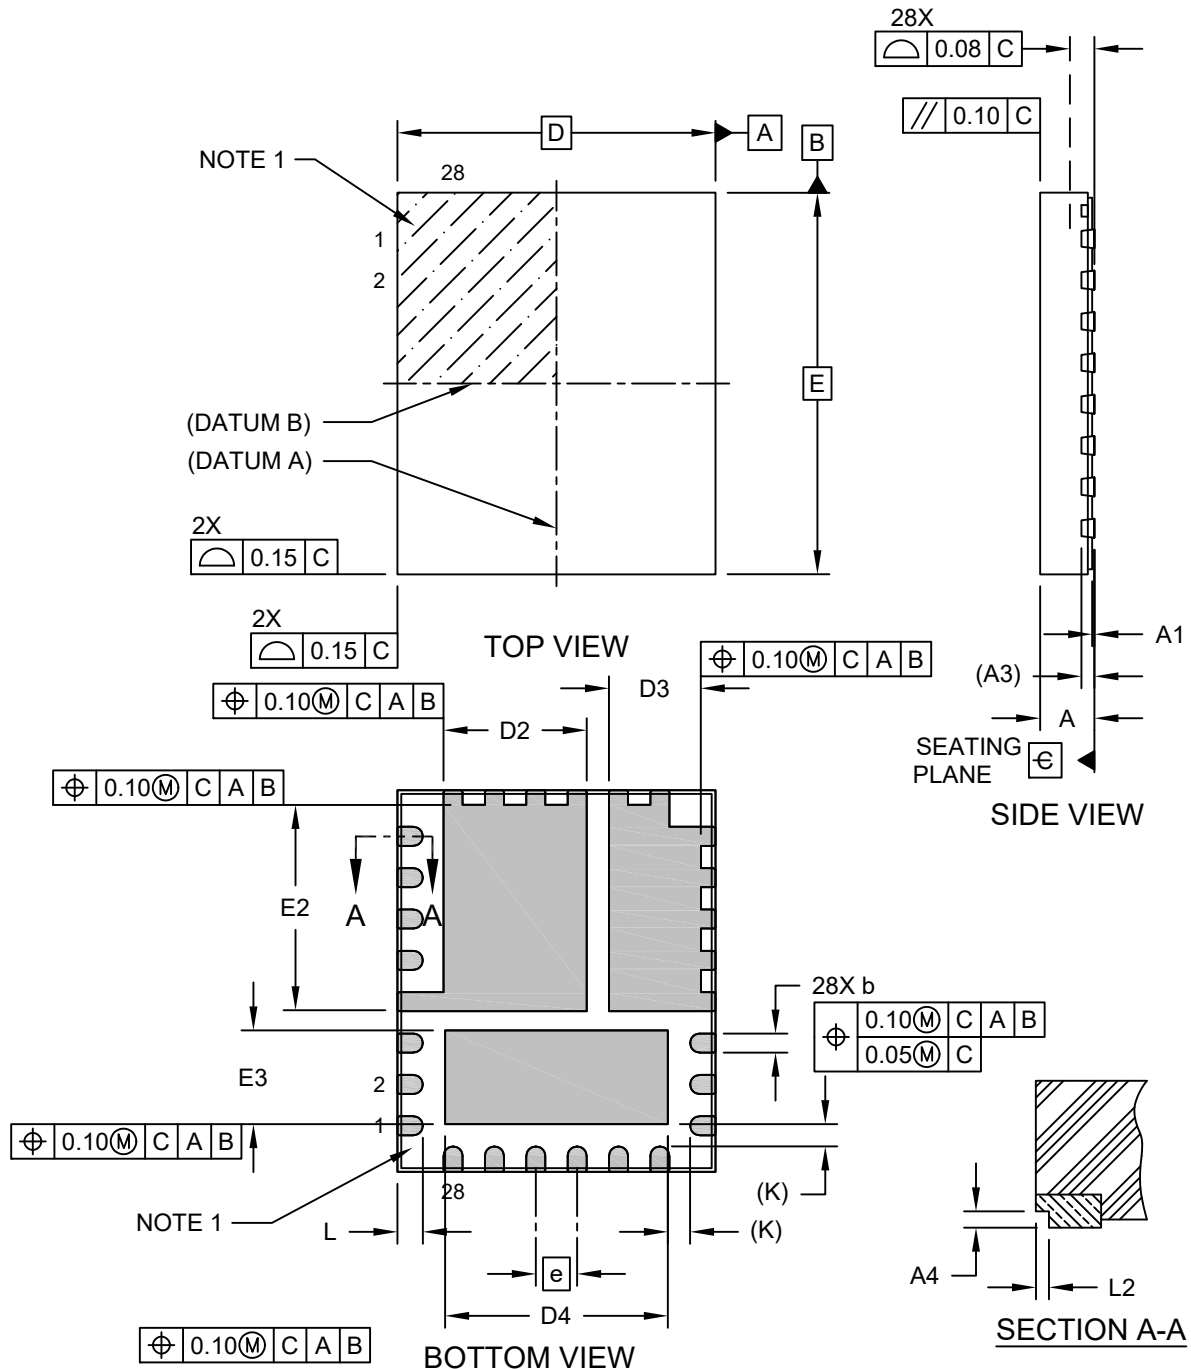

28-Lead Very Thin Plastic Quad Flat, No Lead Package (QEA) - 5x6 mm Body [VQFN] With Multiple Exposed Pads, Fused Terminals and Stepped Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

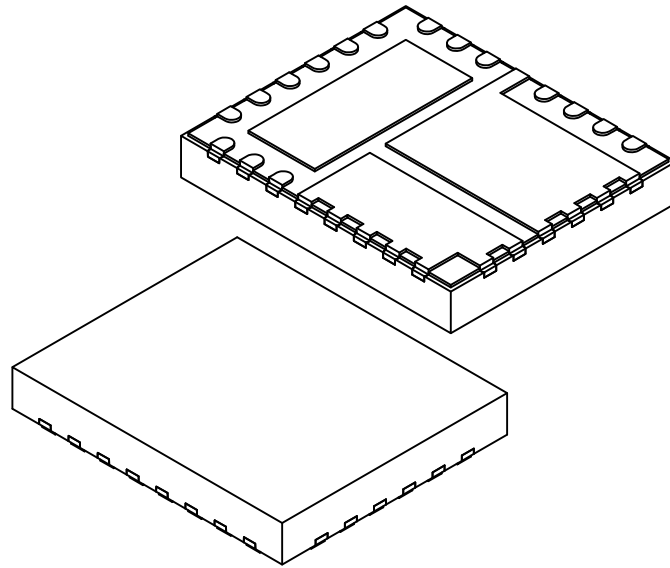


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		28		
Pitch	e		0.65 BSC		
Overall Height	A		–	–	0.90
Standoff	A1		0.00	0.02	0.05
Terminal Thickness	A3		0.203 REF		
Overall Length	D		5.00 BSC		
Exposed Pad Length	D2		2.15	2.25	2.35
Exposed Pad Length	D3		1.345	1.445	1.545
Exposed Pad Length	D4		3.40	3.50	3.60
Overall Width	E		6.00 BSC		
Exposed Pad Width	E2		3.145	3.245	3.345
Exposed Pad Width	E3		1.375	1.475	1.575
Terminal Width	b		0.25	0.30	0.35
Terminal Length	L		0.30	0.40	0.50
Terminal to Exposed Pad	K		0.35 REF		
Step Cut Height	A4		0.10	–	–
Step Cut Length	L2		0.01	–	0.06

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

28-Lead Very Thin Plastic Quad Flat, No Lead Package (QEA) - 5x6 mm Body [VQFN] With Multiple Exposed Pads, Fused Terminals and Stepped Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

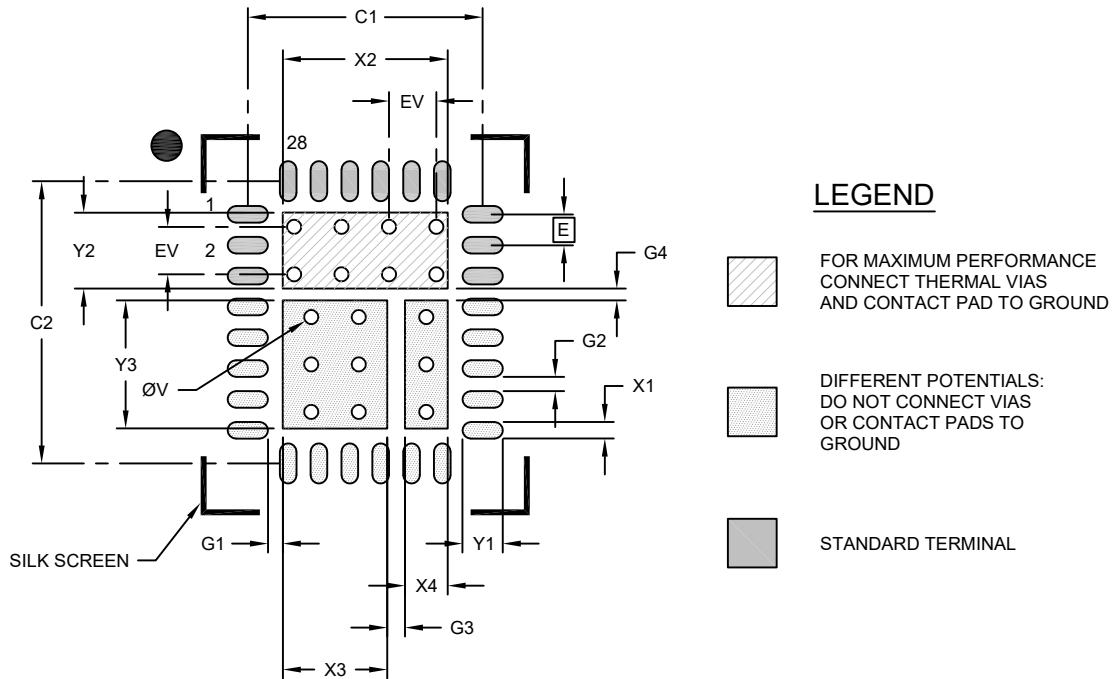

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E		0.65 BSC	
Contact Pad Spacing	C1		4.95	
Contact Pad Spacing	C2		5.95	
Contact Pad Width (X28)	X1			0.35
Contact Pad Length (X28)	Y1			0.85
Center Pad Width	X2			3.60
Center Pad Width	X3			2.35
Center Pad Width	X4			1.545
Center Pad Length	Y2			1.60
Center Pad Length	Y3			3.345
Contact Pad to Center Pad (X28)	G1	0.31		
Contact Pad to Contact Pad (X24)	G2	0.30		
Center Pad to Center Pad	G3	0.38		
Center Pad to Center Pad	G4	0.25		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3274 Rev A