


24-Lead Very Thin Plastic Quad Flat, No Lead Package (QFA) - 3x4 mm Body [VQFN]

With Multiple Exposed Pads and Stepped Wettable Flanks


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

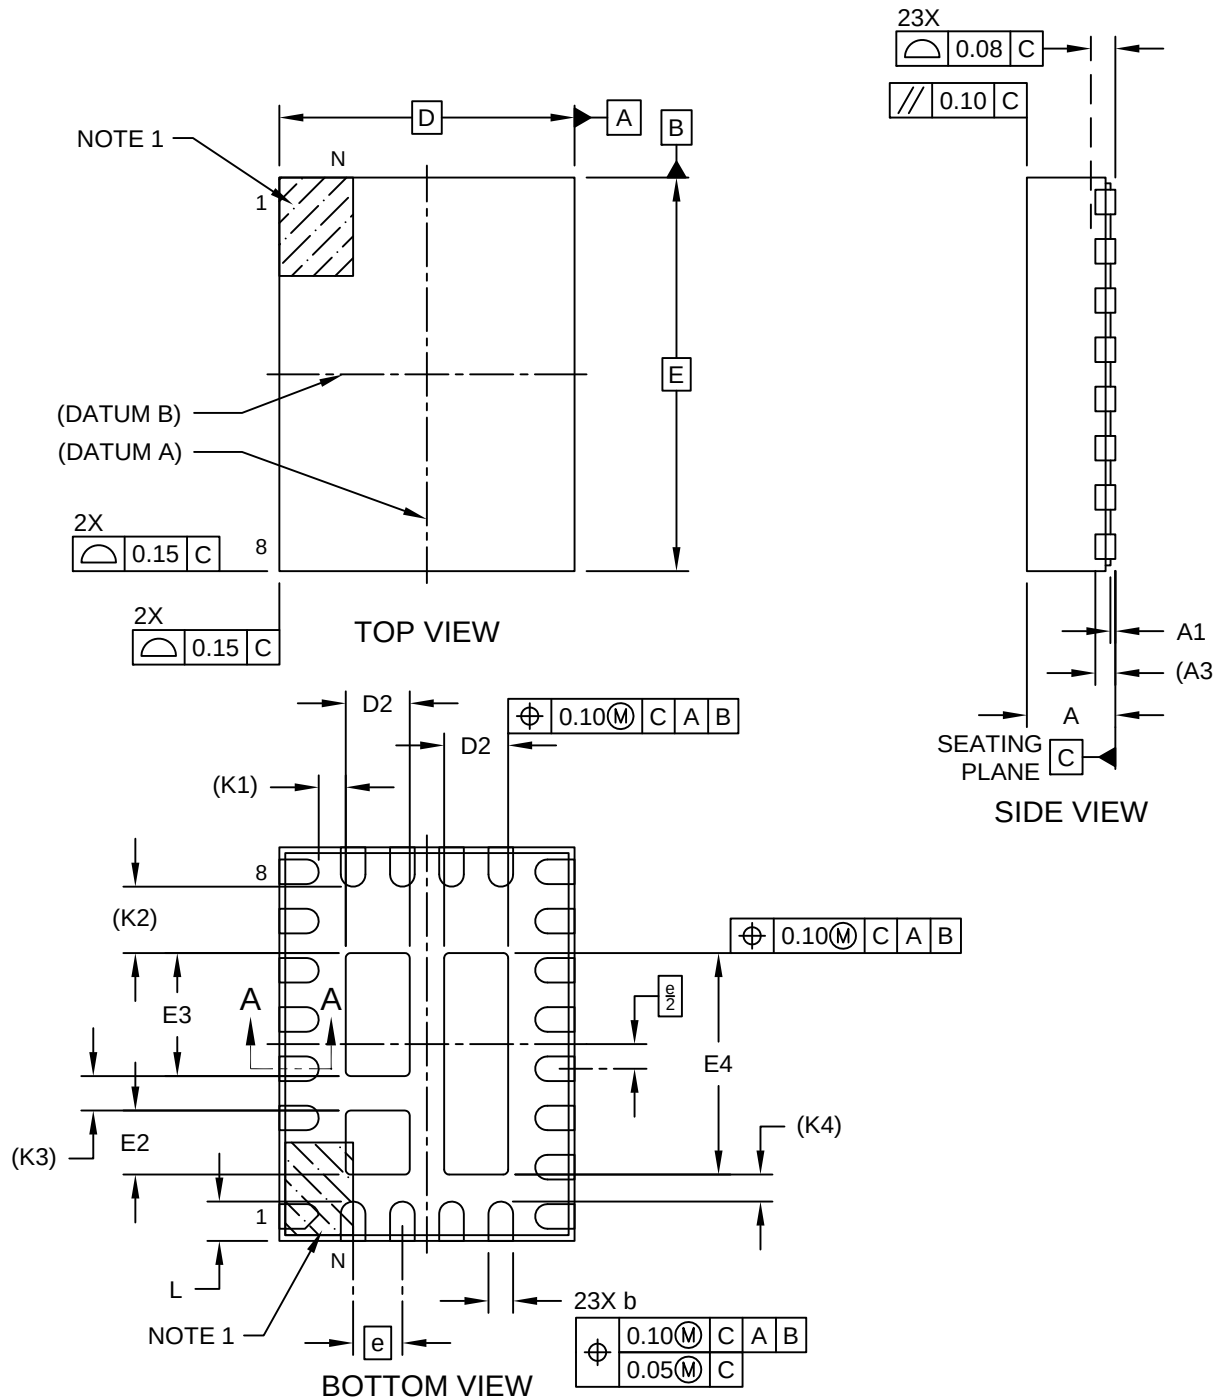

Microchip Technology Drawing C04-1275 Rev A Sheet 1 of 2

24-Lead Very Thin Plastic Quad Flat, No Lead Package (QFA) - 3x4 mm Body [VQFN] With Multiple Exposed Pads and Stepped Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

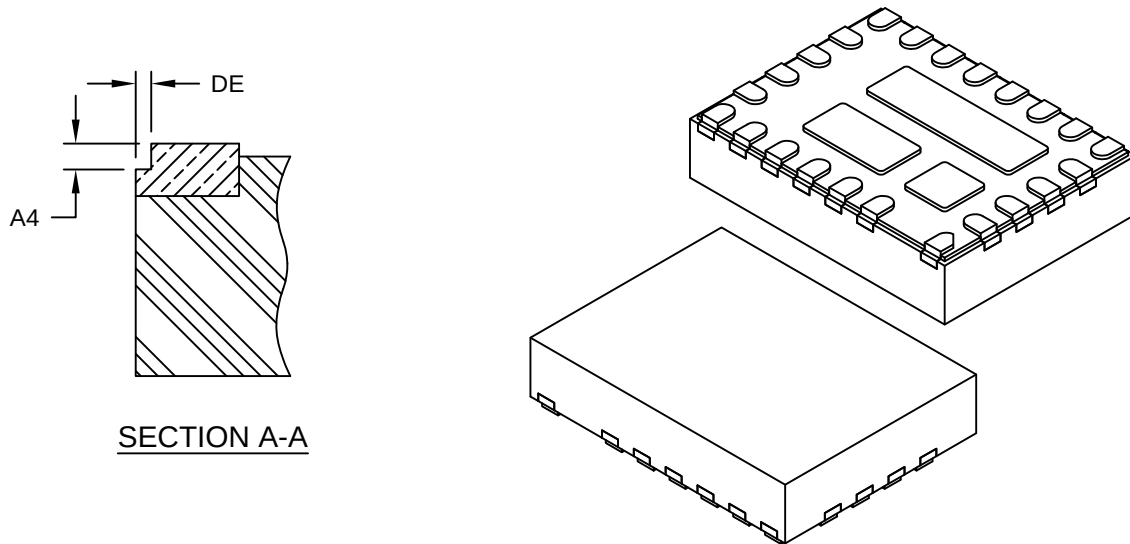


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N	24 Positions (only 23 used)			
Pitch	e	0.50 BSC			
Overall Height	A	-	-	-	0.90
Standoff	A1	0.00	0.02	0.05	
Terminal Thickness	A3	0.203 REF			
Overall Length	D	3.00 BSC			
Exposed Pad Length	D2	0.55	0.65	0.75	
Overall Width	E	4.00 BSC			
Exposed Pad Width	E2	0.55	0.65	0.75	
Exposed Pad Width	E3	1.15	1.25	1.35	
Exposed Pad Width	E4	2.15	2.25	2.35	
Terminal Width	b	0.18	0.25	0.30	
Terminal Length	L	0.30	0.40	0.50	
Terminal-to-Exposed-Pad	K1	0.28 REF			
Terminal-to-Exposed-Pad	K2	0.68 REF			
Terminal-to-Exposed-Pad	K3	0.35 REF			
Terminal-to-Exposed-Pad	K4	0.28 REF			
Step Height	A4	0.10	0.30	0.35	
Step Width	D3	0.01	-	0.06	

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

24Lead Very Thin Plastic Quad Flat, No Lead Package (QFA) - 3x4 mm Body [VQFN] With Multiple Exposed Pads and Stepped Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

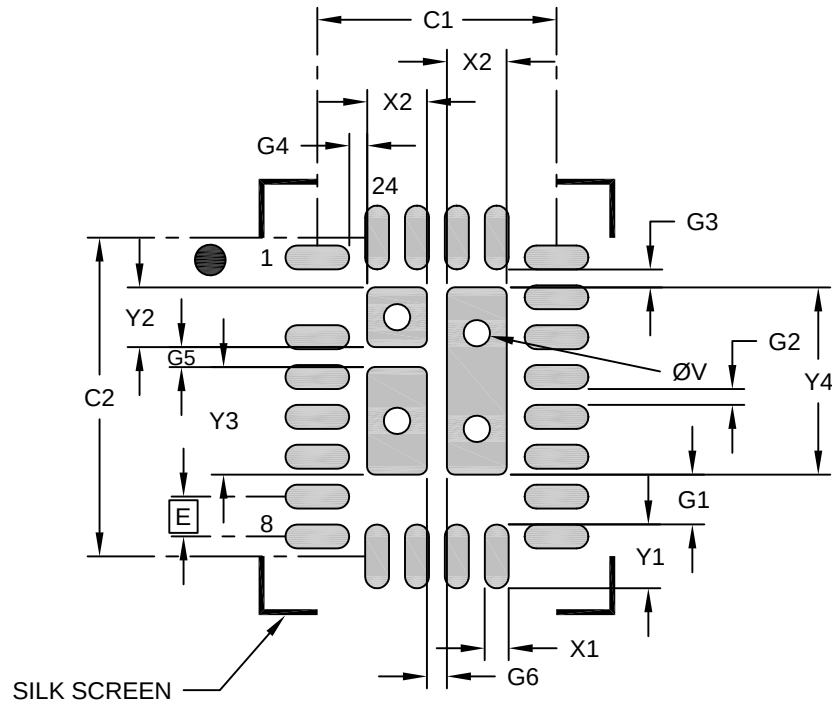

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Center Pad Width	X2			0.75
Center Pad Length	Y2			0.75
Center Pad Length	Y3			1.35
Center Pad Length	Y4			2.35
Contact Pad Spacing	C1		3.00	
Contact Pad Spacing	C2		4.00	
Contact Pad Width (X20)	X1			0.30
Contact Pad Length (X20)	Y1			0.80
Contact Pad to Center Pad (X20)	G1	0.63		
Contact Pad to Contact Pad (X16)	G2	0.20		
Contact Pad to Contact Pad (X16)	G3	0.22		
Contact Pad to Contact Pad (X16)	G4	0.23		
Contact Pad to Contact Pad (X16)	G5	0.28		
Contact Pad to Contact Pad (X16)	G6	0.25		
Thermal Via Diameter	V		0.33	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3275 Rev A