



36-Lead Very Thin Plastic Quad Flat, No Lead Package (QNA) - 5x6x0.9 mm Body [VQFN] With Muple Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

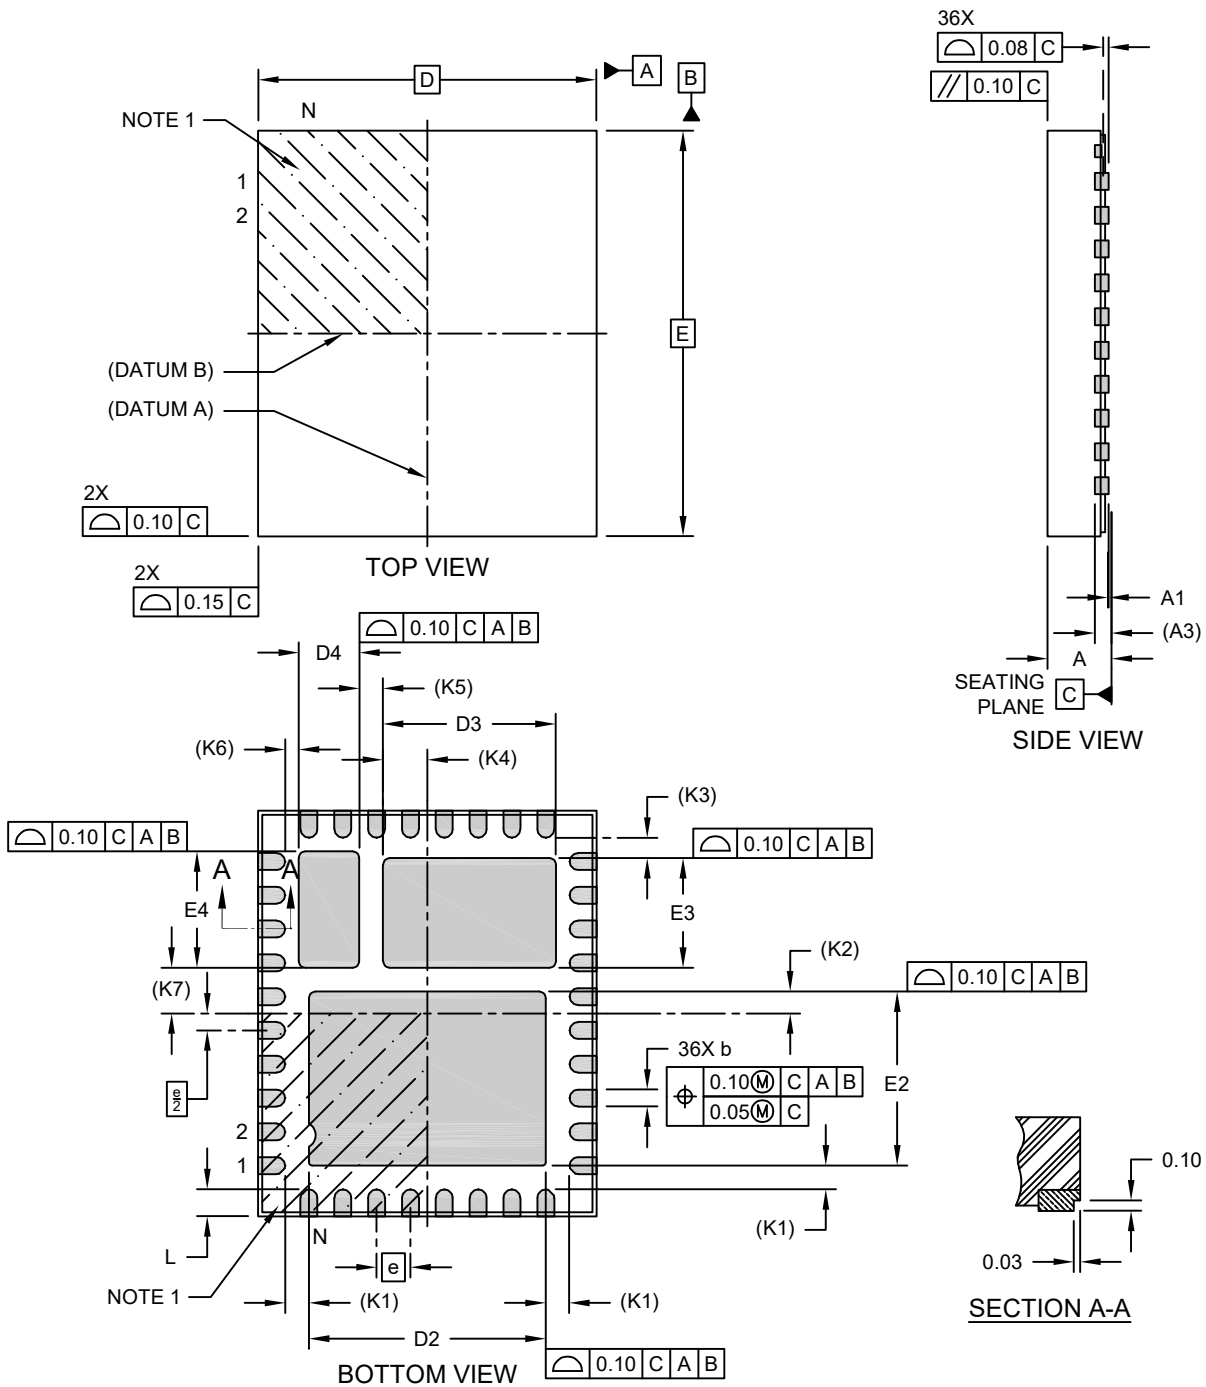

36-Lead Very Thin Plastic Quad Flat, No Lead Package (QNA) - 5x6x0.9 mm Body [VQFN] With Multiple Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

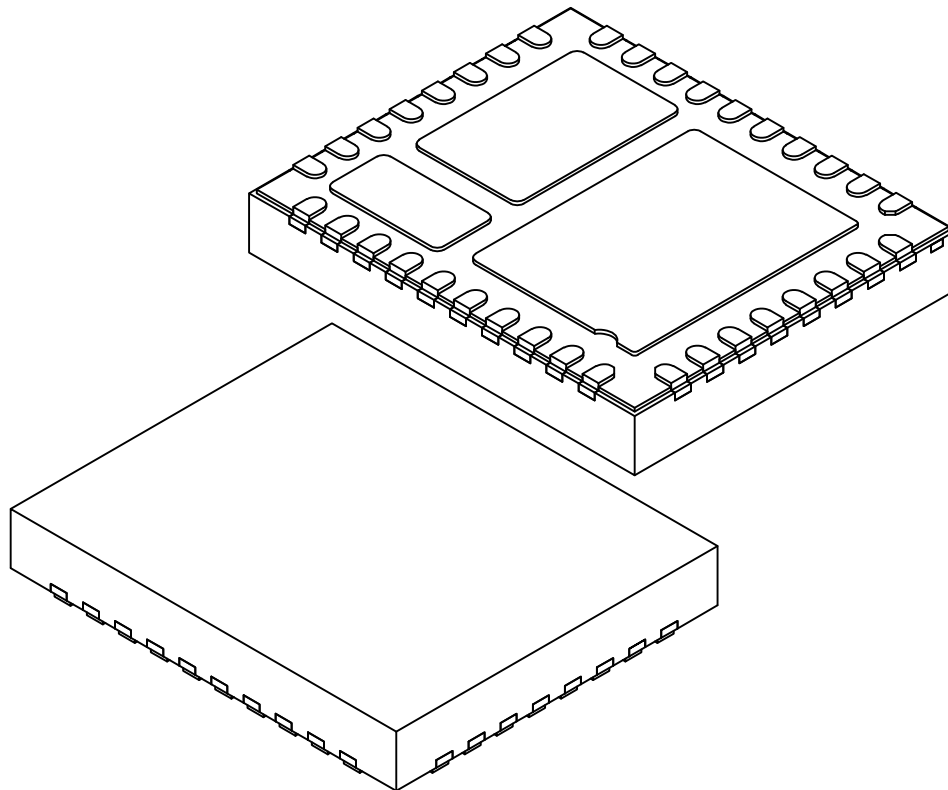

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	36		
Pitch	e	0.50 BSC		
Overall Height	A	—	—	0.90
Standoff	A1	0.00	—	0.05
Terminal Thickness	A3	0.203 REF		
Overall Length	D	5.00 BSC		
Exposed Pad Length	D2	3.40	3.50	3.60
Exposed Pad Length	D3	2.455	2.555	2.655
Exposed Pad Length	D4	0.795	0.895	0.995
Terminal Width	b	0.18	0.25	0.30
Terminal Length	L	0.30	0.40	0.50


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Overall Width	E	6.00 BSC		
Exposed Pad Width	E2	2.475	2.575	2.675
Exposed Pad Width	E3	1.525	1.625	1.725
Exposed Pad Width	E4	1.625	1.725	1.825
Terminal to Exposed Pad	K1	0.35 REF		
Center to Exposed Pad	K2	0.325 REF		
Terminal to Exposed Pad	K3	0.30 REF		
Center to Exposed Pad	K4	0.655 REF		
Pad to Pad	K5	0.123 REF		
Terminal to Exposed Pad	K6	0.20 REF		
Center to Exposed Pad	K7	0.675 REF		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

36-Lead Very Thin Plastic Quad Flat, No Lead Package (QNA) - 5x6x0.9 mm Body [VQFN] With Multiple Exposed Pads

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

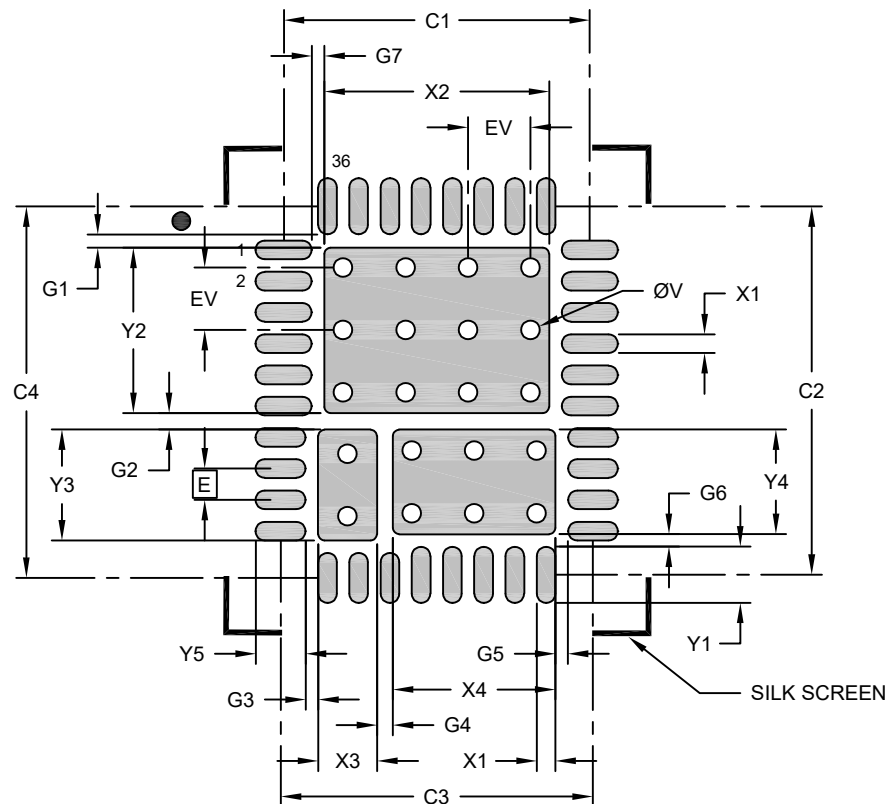

RECOMMENDED LAND PATTERN

Units		MILLIMETERS			Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX	Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC			Center Pad Width	X4			2.61
Contact Pad Spacing	C1		4.90		Center Pad Length	Y4			1.68
Contact Pad Spacing	C2		5.90		Thermal Via Diameter	V		0.30	
Contact Pad Spacing	C3		5.00		Thermal Via Pitch	EV		1.00	
Contact Pad Spacing	C4		5.95		–	G1	0.21		
Contact Pad Width (Xnn)	X1			0.30	–	G2	0.26		
Contact Pad Length (Xnn)	Y1			0.90	–	G3	0.20		
Contact Pad Length (Xnn)	Y5			0.80	–	G4	0.25		
Center Pad Width	X2			3.60	–	G5	0.20		
Center Pad Length	Y2			2.65	–	G6	0.20		
Center Pad Width	X3			0.95	–	G7	0.20		
Center Pad Length	Y3			1.78					

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process