


Packaging Diagrams and Parameters

39-Lead Wireless Module (2XW) - 15.5x20.7x2.8 mm Body [MODULE] With Metal Shield and Coaxial Connector


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

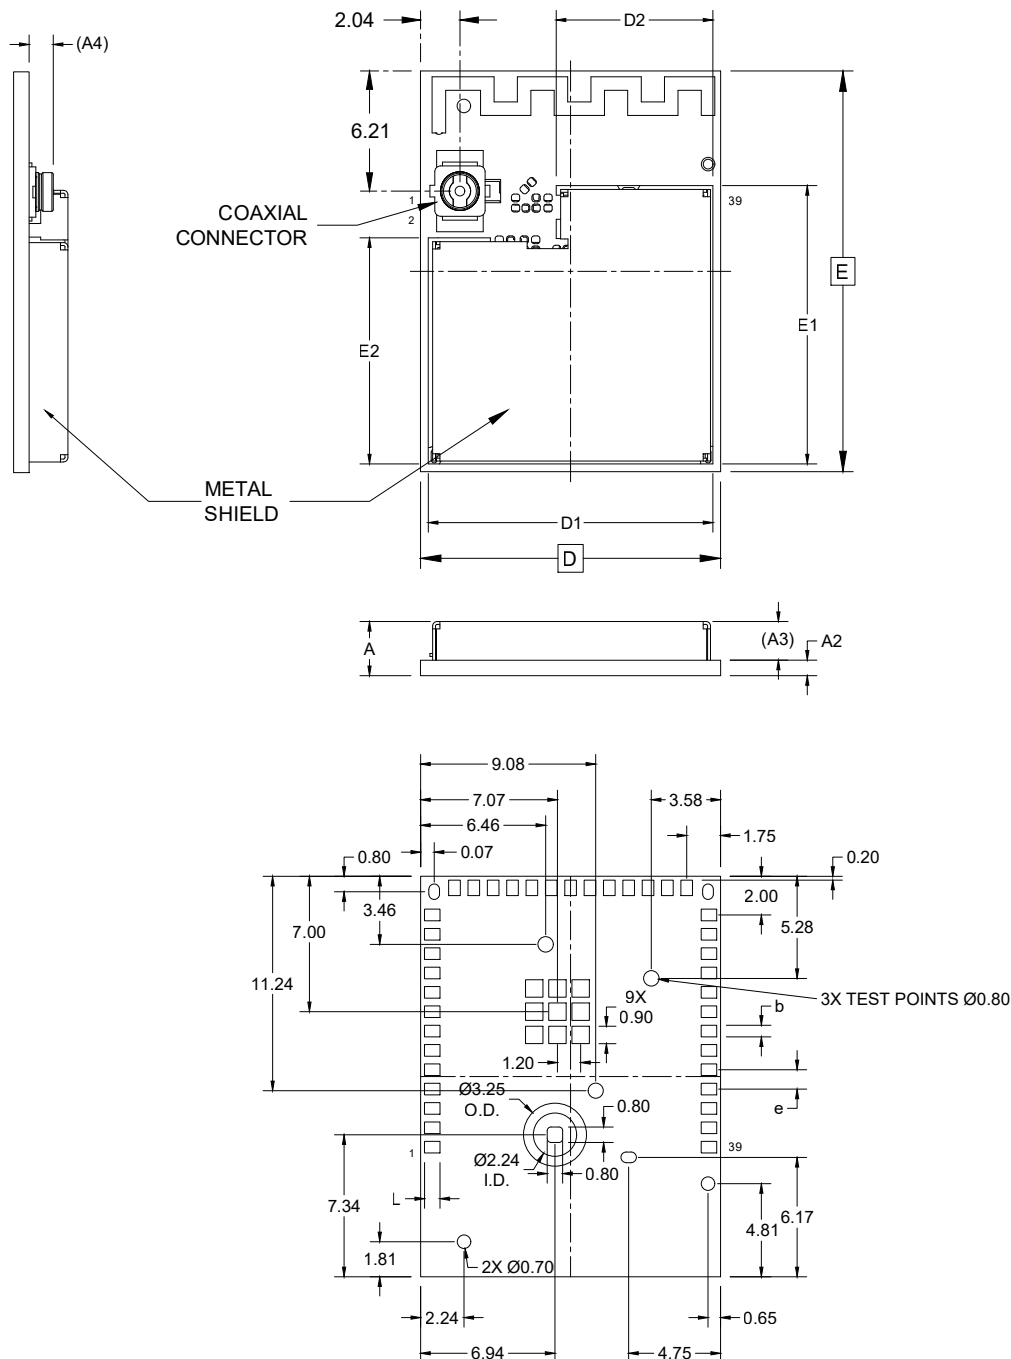

Packaging Diagrams and Parameters

39-Lead Wireless Module (2XW) - 15.5x20.7x2.8 mm Body [MODULE] With Metal Shield and Coaxial Connector

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

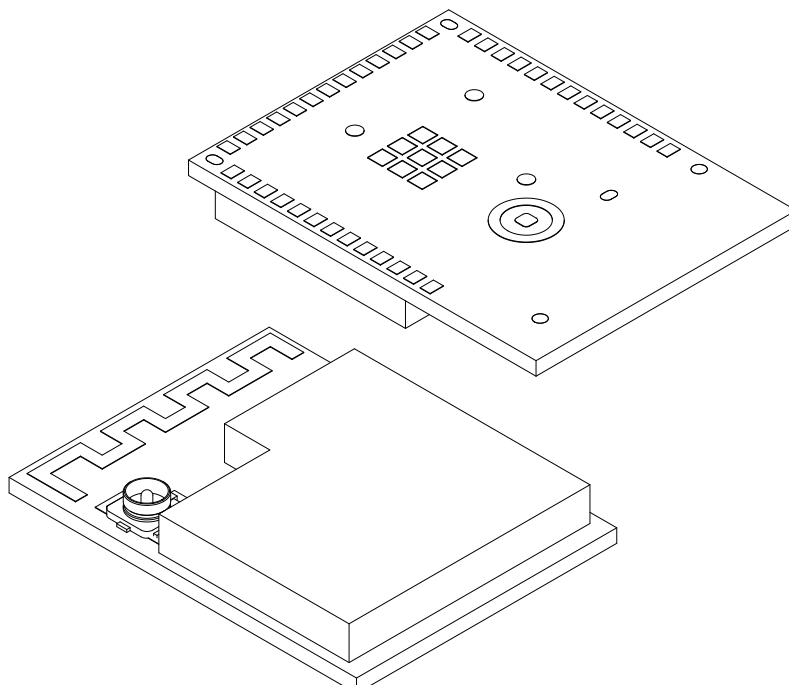


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		39		
Terminal Pitch	e		1.00 BSC		
Overall Height	A		2.60	2.80	3.00
PCB Thickness	A2		0.70	0.80	0.90
Shield Height	A3		1.90	2.00	2.10
UFL Connector Height	A4		1.25 REF		
Overall Length	D		15.40	15.50	15.60
Overall Width	E		20.60	20.70	20.80
Shield Length	D1		14.60	14.70	14.80
Shield Length	D2		7.99	8.09	8.19
Shield Width	E1		14.28	14.38	14.48
Shield Width	E2		11.58	11.68	11.78
Terminal Width	b		0.50	0.60	0.70
Terminal Length	L		0.70	0.80	0.90

Land Pattern

39-Lead Wireless Module (2XW) - 15.5x20.7x2.8 mm Body [MODULE] With Metal Shield and Coaxial Connector

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

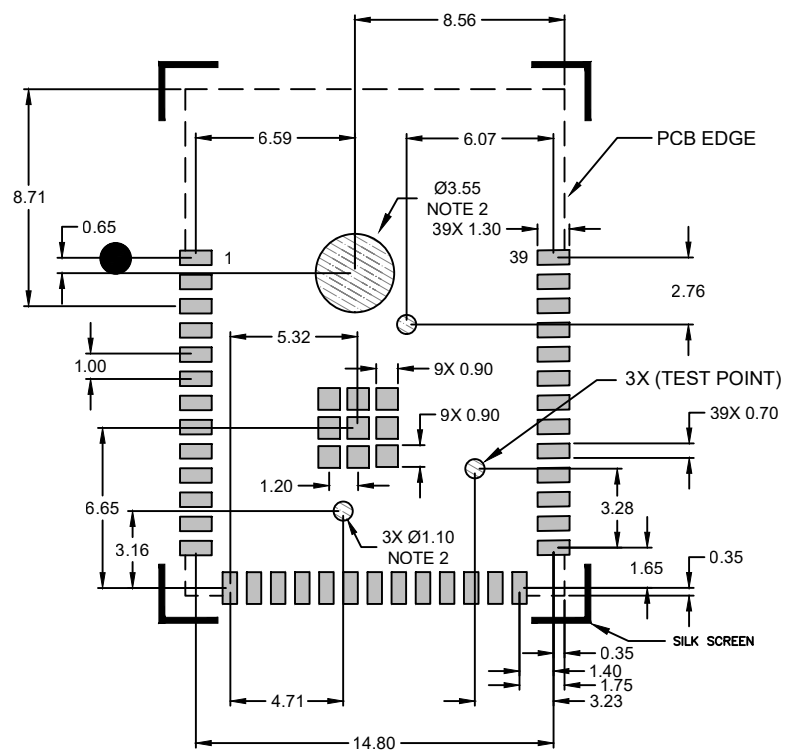

COPPER KEEPOUT ZONE

RECOMMENDED LAND PATTERN

Notes:

1. All dimensions are in millimeters.
2. Keep these areas free from routes and exposed copper including ground fill.