



Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>



**132-Lead Dual Row Very Thin Plastic Quad Flat, No Lead (NBX) - 11x11 mm Body [DQFN]
With 5.0 mm Exposed Pad; SMSC Legacy Package**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

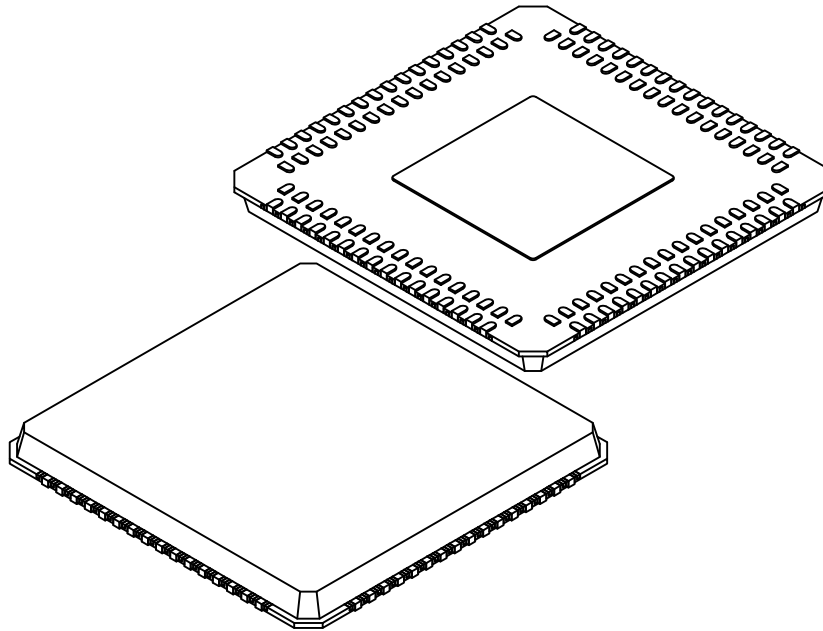

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		132		
Pitch	e		0.50 BSC		
Pitch Between Rows	e1		0.65 BSC		
Overall Height	A		0.80	0.85	0.90
Standoff	A1		0.00	0.01	0.05
Terminal Thickness	A3		0.203 REF		
Overall Length	D		11.00 BSC		
Molded Top Length	D1		10.75 BSC		
Exposed Pad Length	D2		4.90	5.00	5.10
Overall Width	E		11.00 BSC		
Molded Top Width	E1		10.75 BSC		
Exposed Pad Width	E2		4.90	5.00	5.10
Terminal Width	b		0.17	0.22	0.27
Outer Terminal Length	L1		0.30	0.40	0.50
Inner Terminal Length	L2		0.30	0.40	0.50

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is punch singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

RECOMMENDED LAND PATTERN

Notes: