
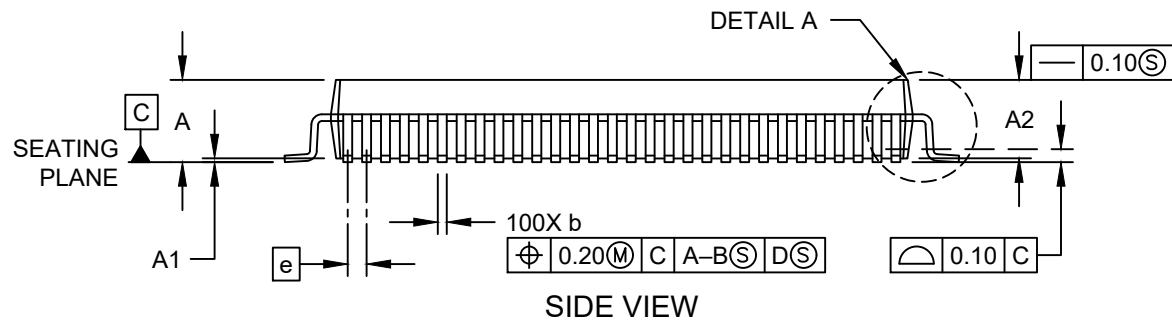



**100-Lead Metric Quad Flat Pack (B9X) - 14x20x2.70 mm Body [MQFP]
With 3.20 mm Footprint; Supertex Legacy Package FG**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

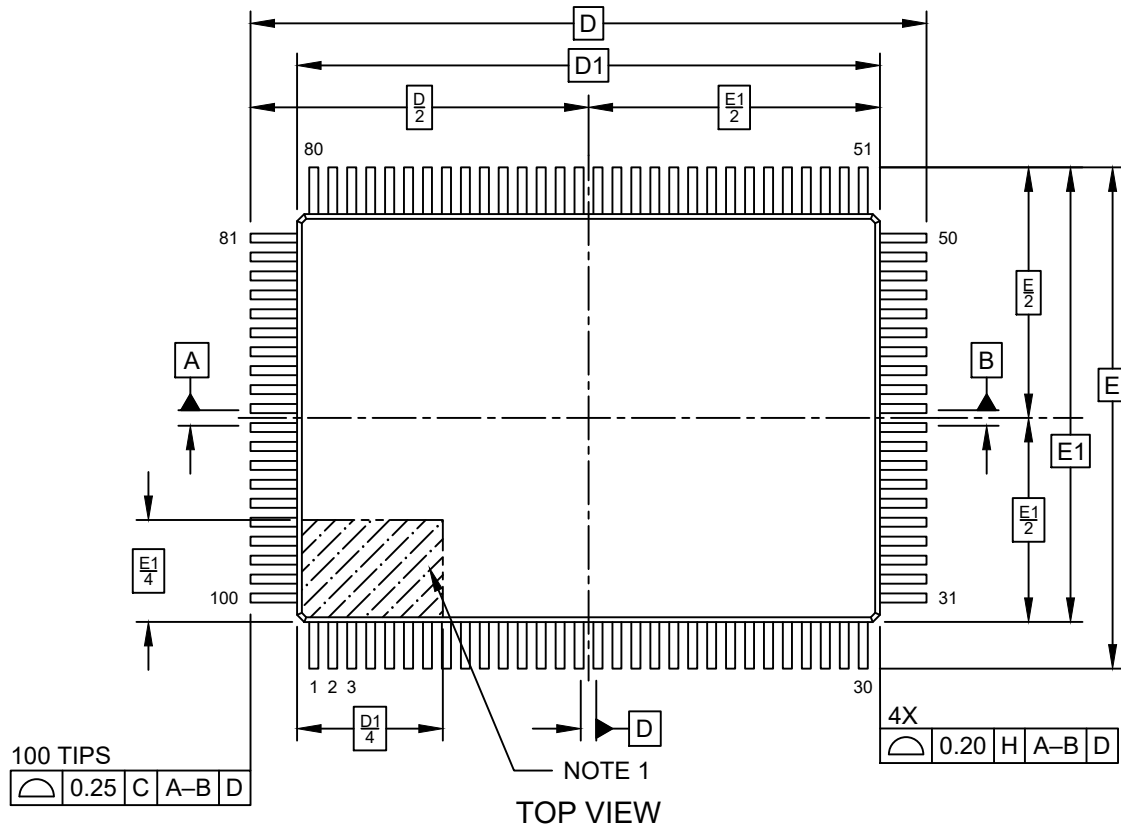

**100-Lead Metric Quad Flat Pack (B9X) - 14x20x2.70 mm Body [MQFP]
With 3.20 mm Footprint; Supertex Legacy Package FG**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

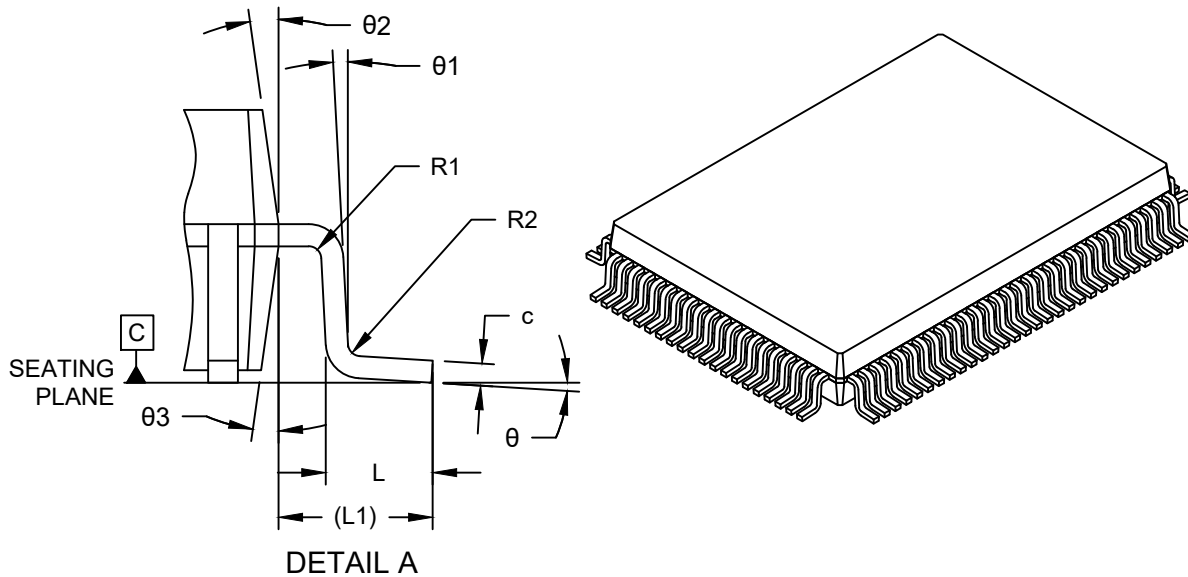


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		100		
Pitch	e		0.65 BSC		
Overall Height	A		2.50	–	3.15
Standoff	A1		0.00	–	0.25
Molded Package Thickness	A2		2.50	2.70	2.90
Overall Length	D		23.20 BSC		
Molded Package Length	D1		20.00 BSC		
Overall Width	E		17.20 BSC		
Molded Package Width	E1		14.00 BSC		
Terminal Width	b		0.22	–	0.40
Terminal Thickness	c		0.11	–	0.23
Terminal Length	L		0.73	0.88	1.03
Footprint	L1		1.60 REF		
Lead Bend Radius	R1		0.13	–	–
Lead Bend Radius	R2		0.13	–	–
Foot Angle	θ		0°	3.5°	7°
Lead Angle	θ1		0°	–	–
Mold Draft Angle	θ2		5°	12°	16°
Mold Draft Angle	θ3		5°	12°	16°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

**100-Lead Metric Quad Flat Pack (B9X) - 14x20x2.70 mm Body [MQFP]
With 3.20 mm Footprint; Supertex Legacy Package FG**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

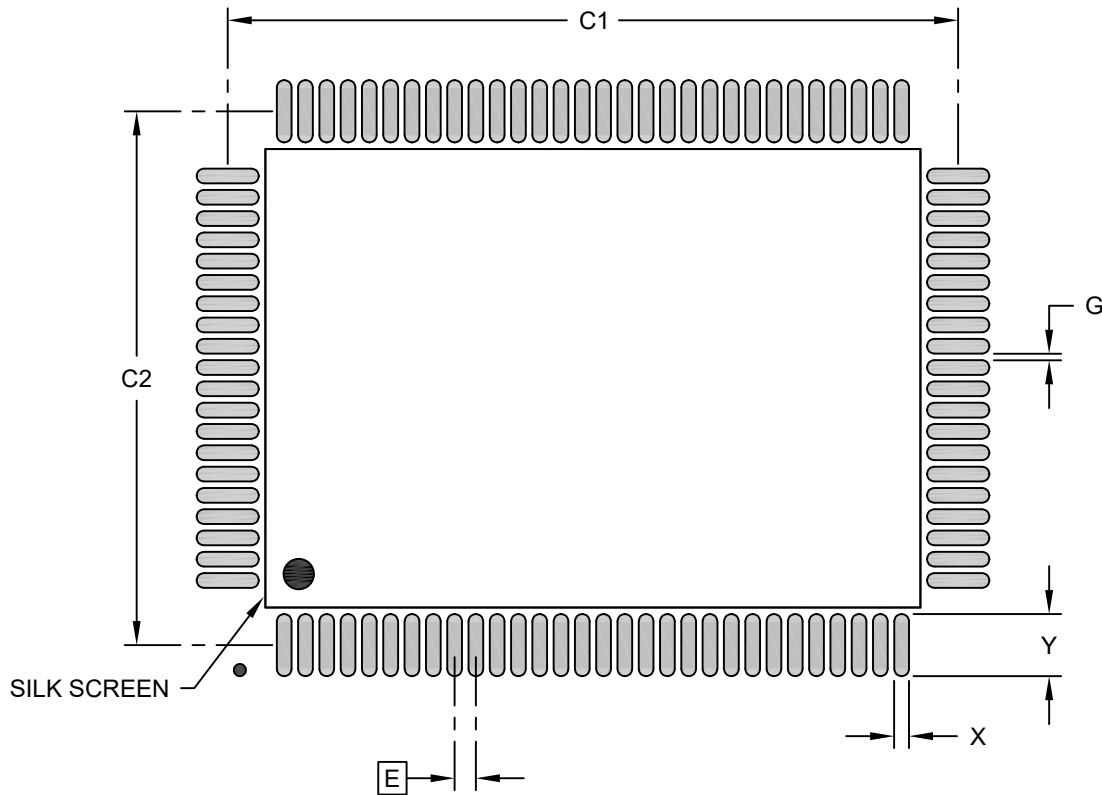

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Spacing	C1		22.30	
Contact Pad Spacing	C2		16.30	
Contact Pad Width (X100)	X			0.45
Contact Pad Length (X100)	Y			1.90
Contact Pad to Contact Pad (X96)	G	0.20		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.