



36-Lead Very Thin Plastic Quad Flat, No Lead Package (RPX) - 6x6 mm Body [VQFN] SMSC Legacy QFN Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

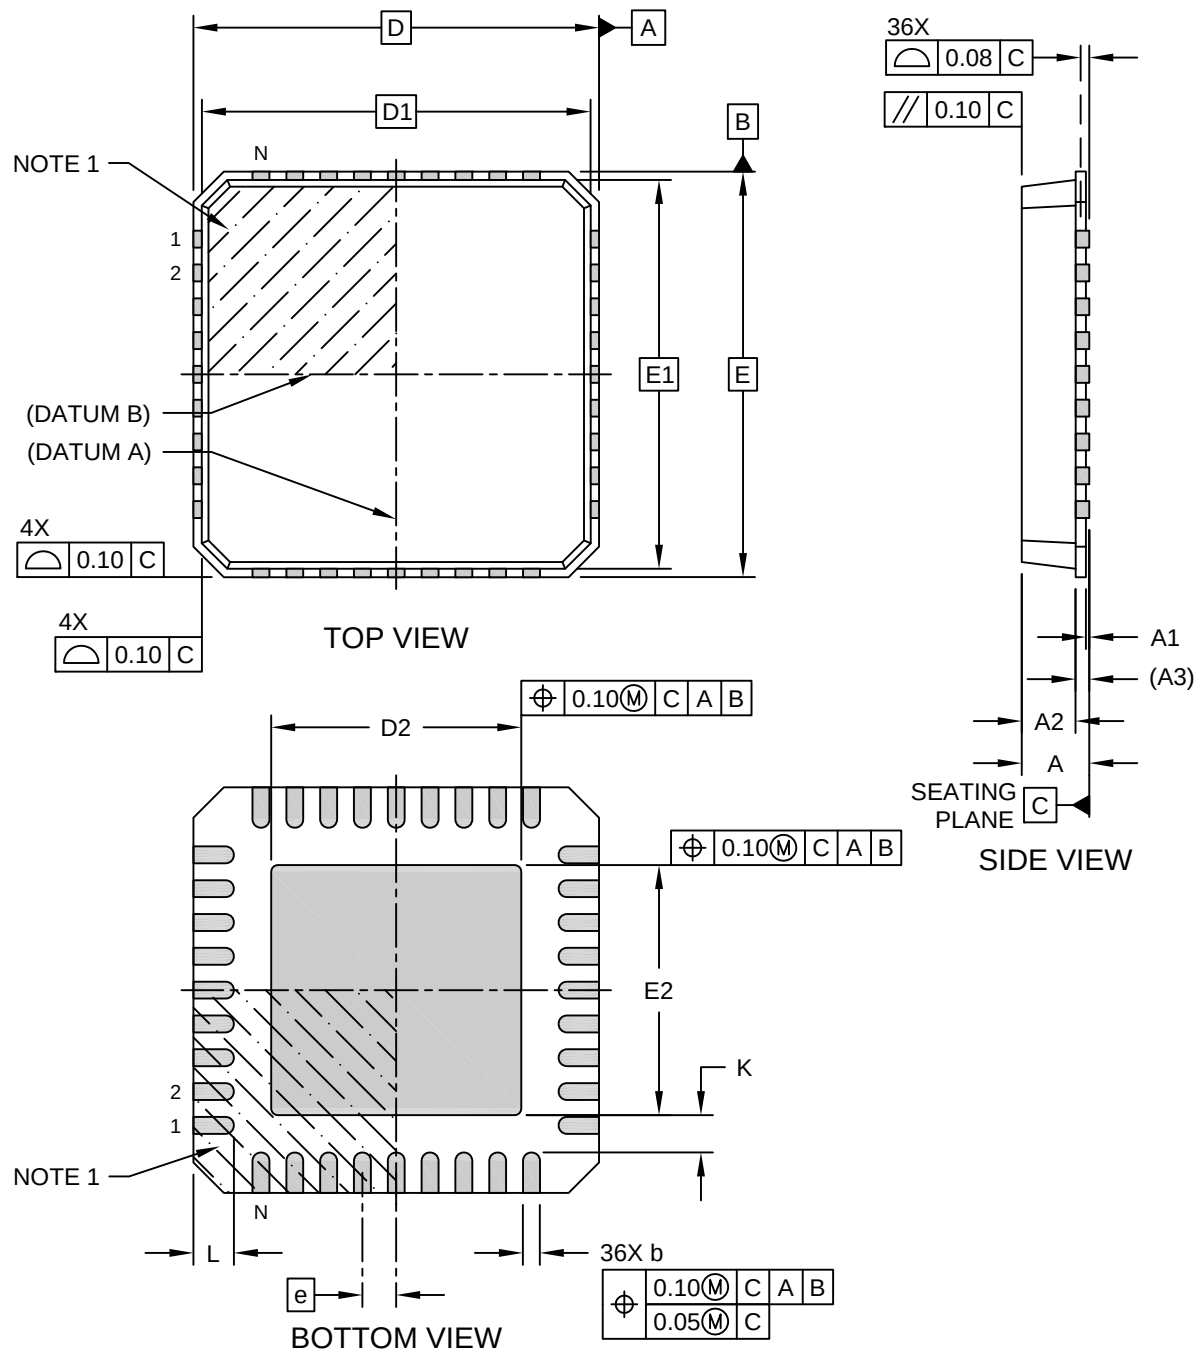

36-Lead Very Thin Plastic Quad Flat, No Lead Package (RPX) - 6x6 mm Body [VQFN] SMSC Legacy QFN Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

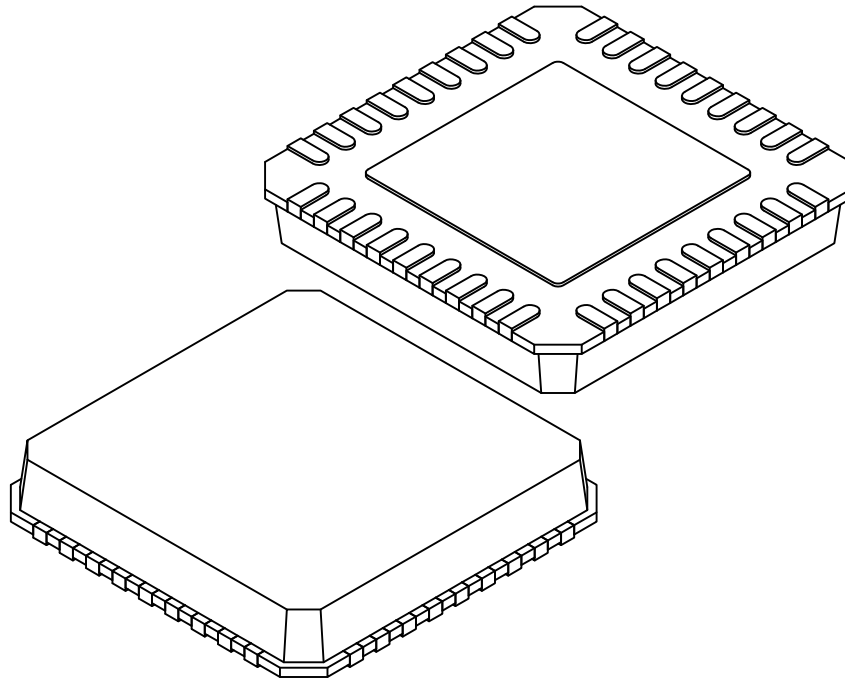

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	36		
Pitch	e	0.50 BSC		
Overall Height	A	0.80	0.85	1.00
Standoff	A1	0.00	0.02	0.05
Molded Top Thickness	A2	-	-	0.90
Terminal Thickness	A3	0.20 REF		
Overall Length	D	6.00 BSC		
Molded Top Length	D1	5.75 BSC		
Overall Width	E	6.00 BSC		
Molded Top Width	E1	5.75 BSC		
Terminal Width	b	0.18	0.25	0.30
Terminal Length	L	0.50	0.60	0.75
Terminal-to-Exposed-Pad	K	0.20	-	-

Alternate Exposed Pad Dimensions


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Exposed Pad Length	D2	3.60	3.70	3.80
Exposed Pad Width	E2	3.60	3.70	3.80
Exposed Pad Length	D2	4.00	4.10	4.20
Exposed Pad Width	E2	4.00	4.10	4.20

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is punch singulated
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

36-Lead Very Thin Plastic Quad Flat, No Lead Package (RPX) - 6x6 mm Body [VQFN] With 3.70mm Exposed Pad; SMSC Legacy QFN Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

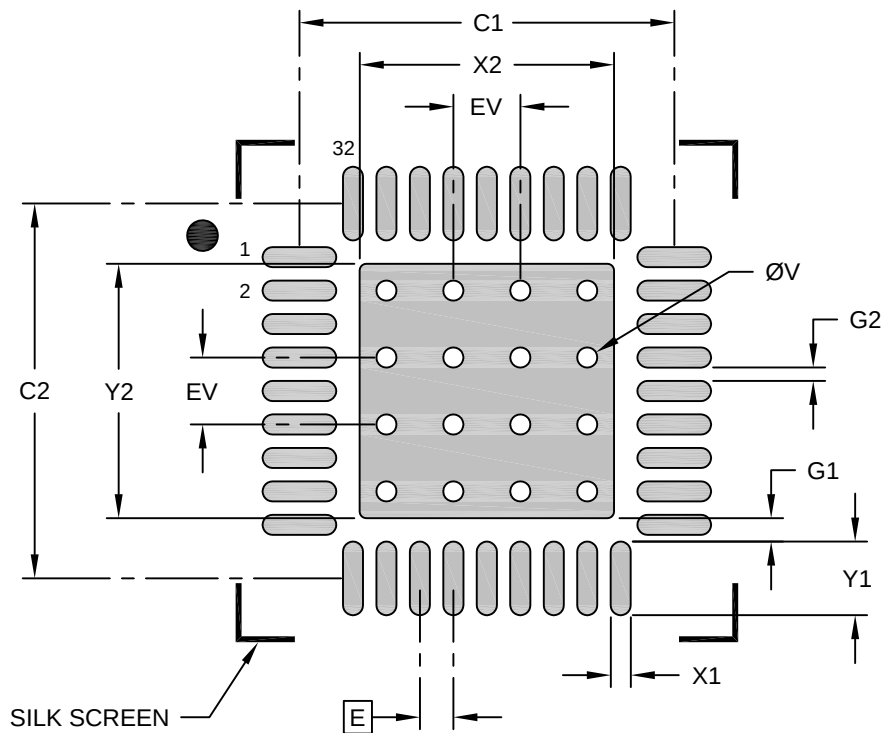

RECOMMENDED LAND PATTERN


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Optional Center Pad Width	X2			3.80
Optional Center Pad Length	Y2			3.80
Contact Pad Spacing	C1		5.60	
Contact Pad Spacing	C2		5.60	
Contact Pad Width (X32)	X1			0.30
Contact Pad Length (X32)	Y1			1.10
Contact Pad to Center Pad (X32)	G1	0.35		
Contact Pad to Contact Pad (X28)	G2	0.20		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

36-Lead Very Thin Plastic Quad Flat, No Lead Package (RPX) - 6x6 mm Body [VQFN] With 4.10 mm Exposed Pad; SMSC Legacy QFN Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

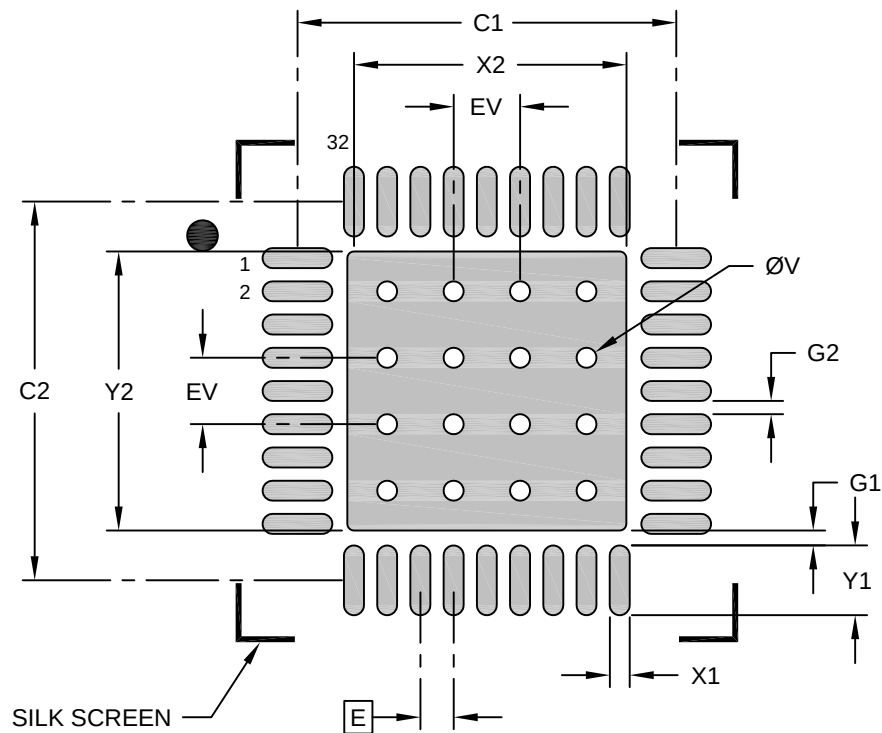

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Optional Center Pad Width	X2			4.10
Optional Center Pad Length	Y2			4.10
Contact Pad Spacing	C1		5.70	
Contact Pad Spacing	C2		5.70	
Contact Pad Width (X32)	X1			0.30
Contact Pad Length (X32)	Y1			1.05
Contact Pad to Center Pad (X32)	G1	0.23		
Contact Pad to Contact Pad (X28)	G2	0.20		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-19032-4.1 Rev B