



Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>



208-Ball Low Profile Fine Pitch Ball Grid Array (ASB) - 15x15x1.5 mm Body [LFGBA] Atmel Legacy Global Package Code CVF

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

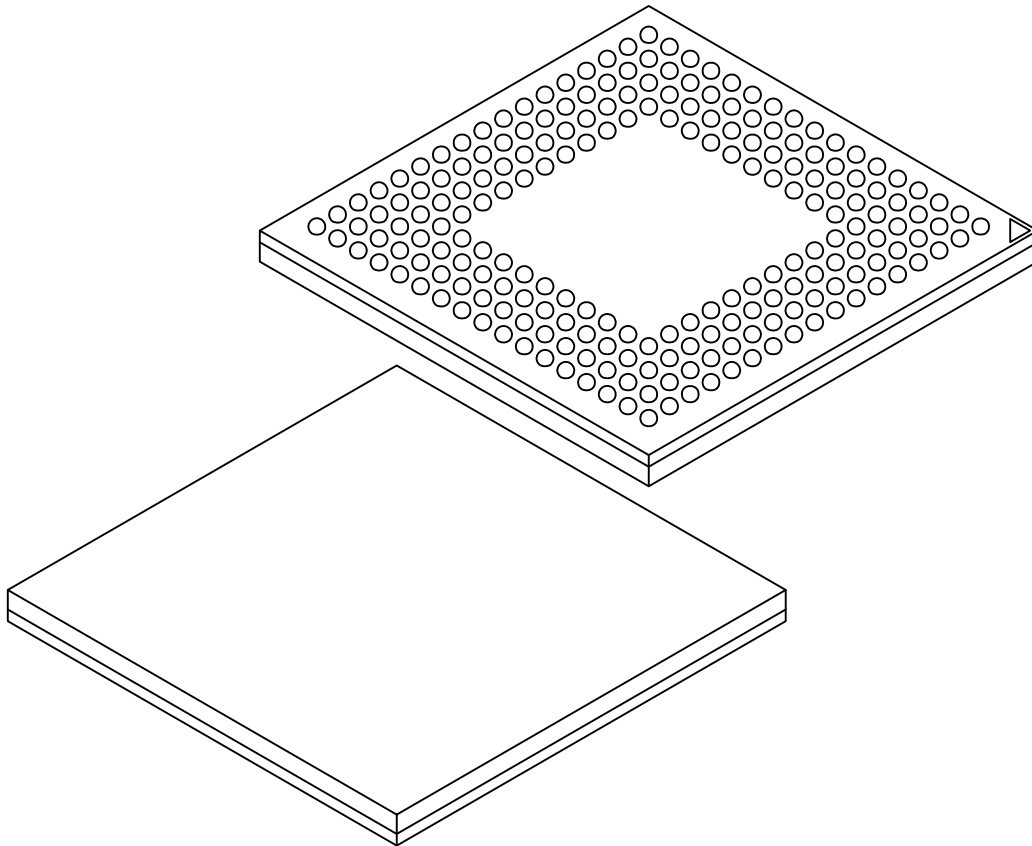


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	208		
Pitch	e	0.80 BSC		
Overall Height	A	1.30	1.40	1.50
Ball Height	A1	0.31	0.36	0.41
Mold Cap Thickness	A2	0.70 REF		
Overall Length	D	15.00 BSC		
Overall Width	E	15.00 BSC		
Terminal Diameter	b	0.41	0.46	0.51

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

208-Ball Low Profile Fine Pitch Ball Grid Array (ASB) - 15x15x1.5 mm Body [LFGBA] Atmel Legacy Global Package Code CVF

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

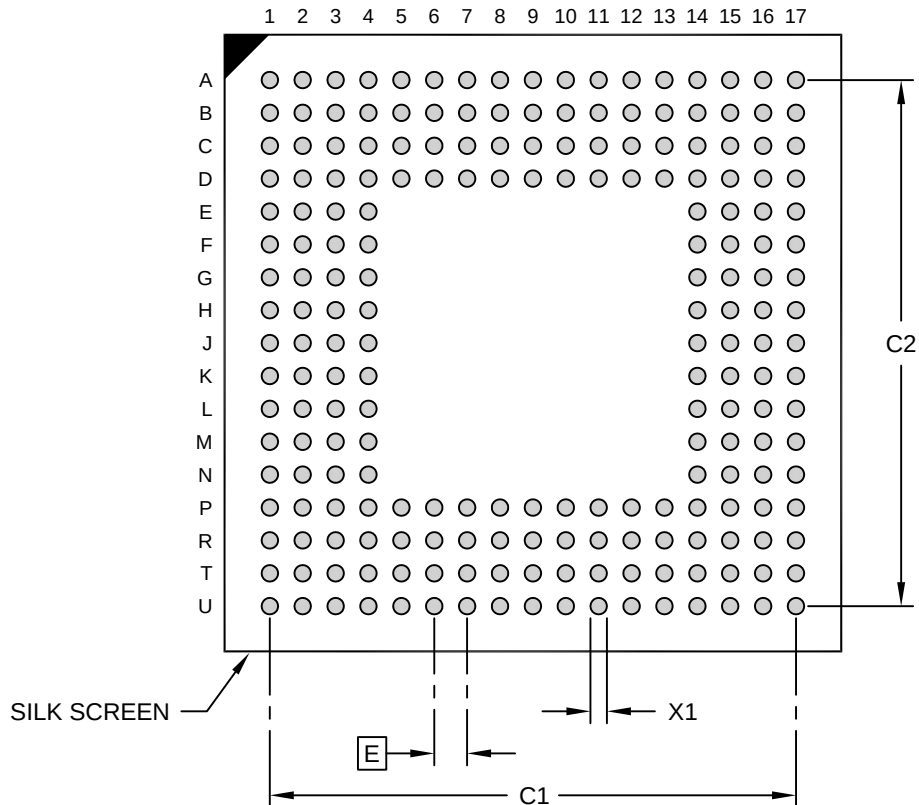

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1		12.80	
Contact Pad Spacing	C2		12.80	
Contact Pad Width (X208)	X1			0.40

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23128 Rev A