



40-Lead Thin Fine Pitch Ball Grid Array (AXB) - 4x4x1.11 mm Body [TFBGA] Atmel Legacy Global Package Code CDQ

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

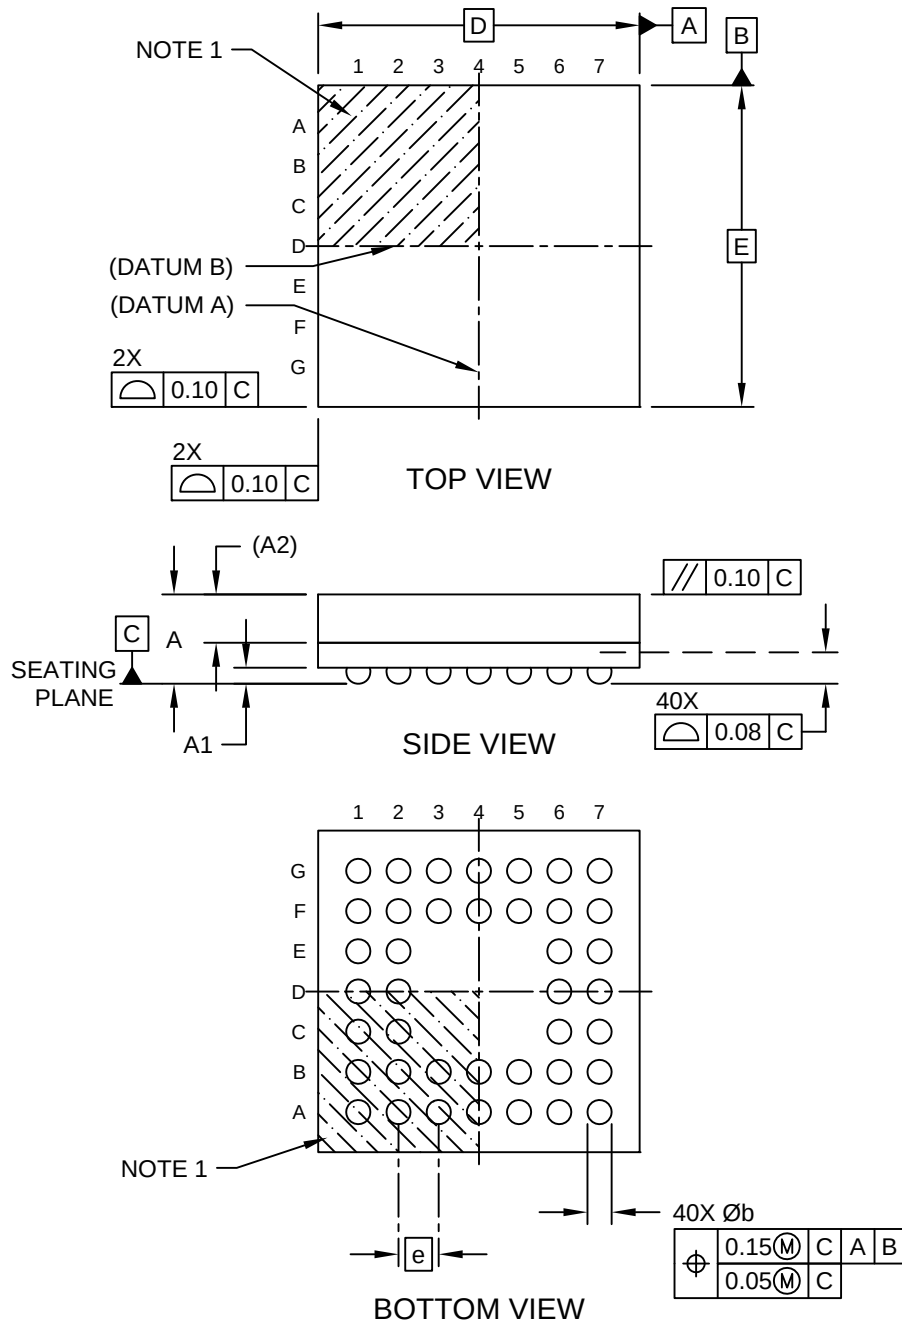

40-Lead Thin Fine Pitch Ball Grid Array (AXB) - 4x4x1.11 mm Body [TFBGA]
Atmel Legacy Global Package Code CDQ

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

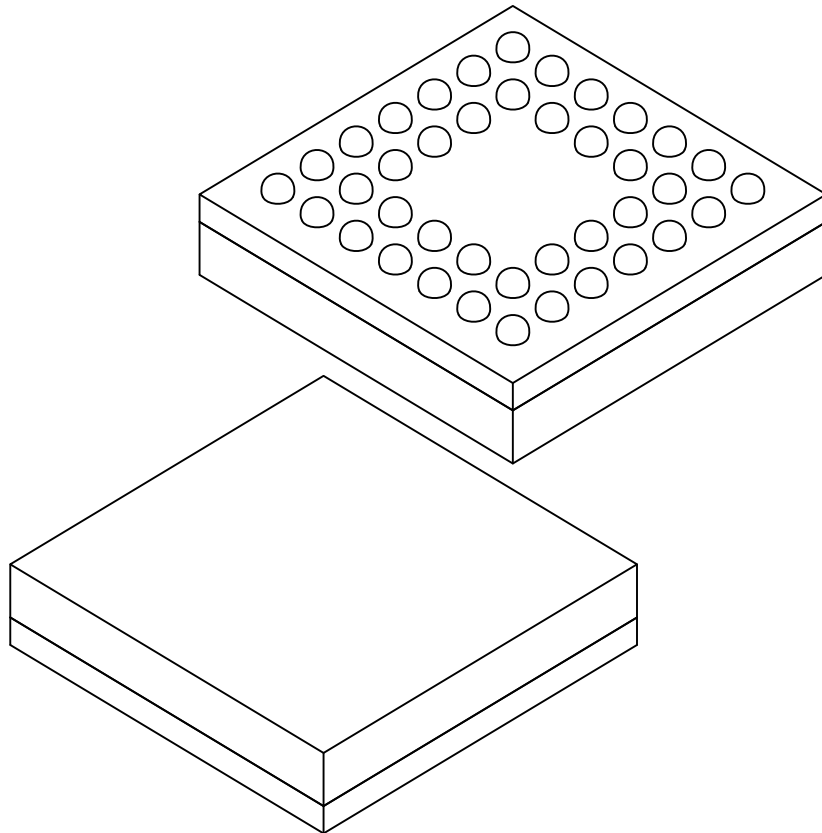


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	40		
Pitch	e	0.50 BSC		
Overall Height	A	0.91	1.01	1.11
Ball Height	A1	0.15	0.20	0.25
Mold Cap Thickness	A2	0.60 REF		
Overall Length	D	4.00 BSC		
Overall Width	E	4.00 BSC		
Terminal Diameter	b	0.25	0.30	0.35

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

40-Lead Thin Fine Pitch Ball Grid Array (AXB) - 4x4x1.11 mm Body [TFBGA] Atmel Legacy Global Package Code CDQ

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

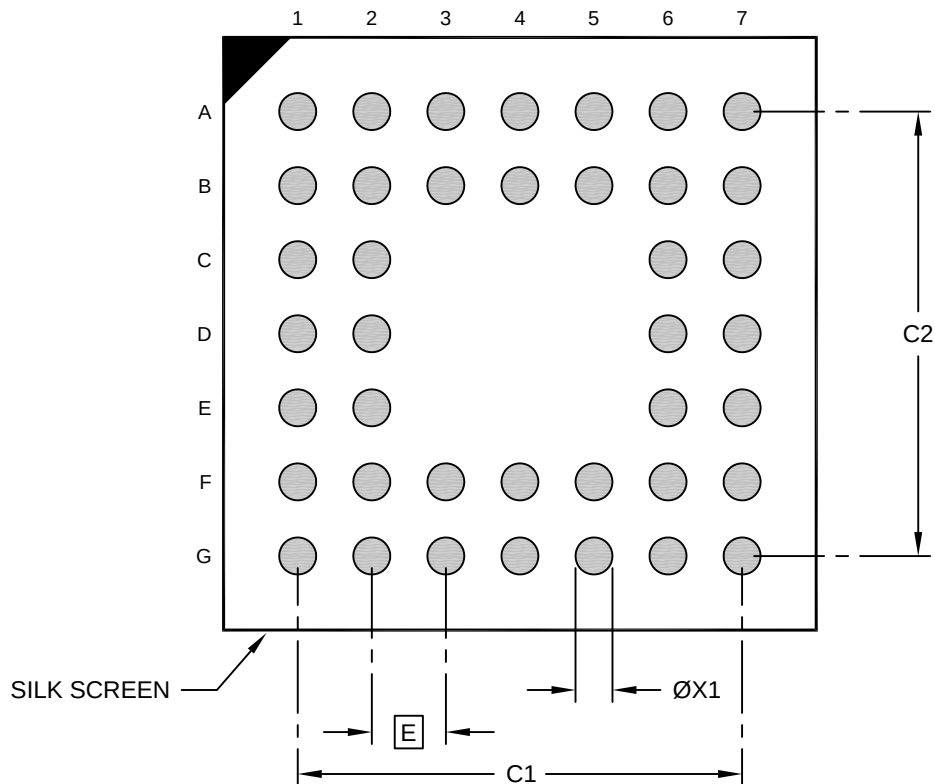

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Contact Pad Spacing	C1		3.00	
Contact Pad Spacing	C2		3.00	
Contact Pad Diameter (X40)	X1			0.30

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23132 Rev A