



100-Ball Thin Fine Pitch Ball Grid Array (B2B) - 9x9x1.2 mm Body [TFBGA] Atmel Legacy Global Package Code CPR

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

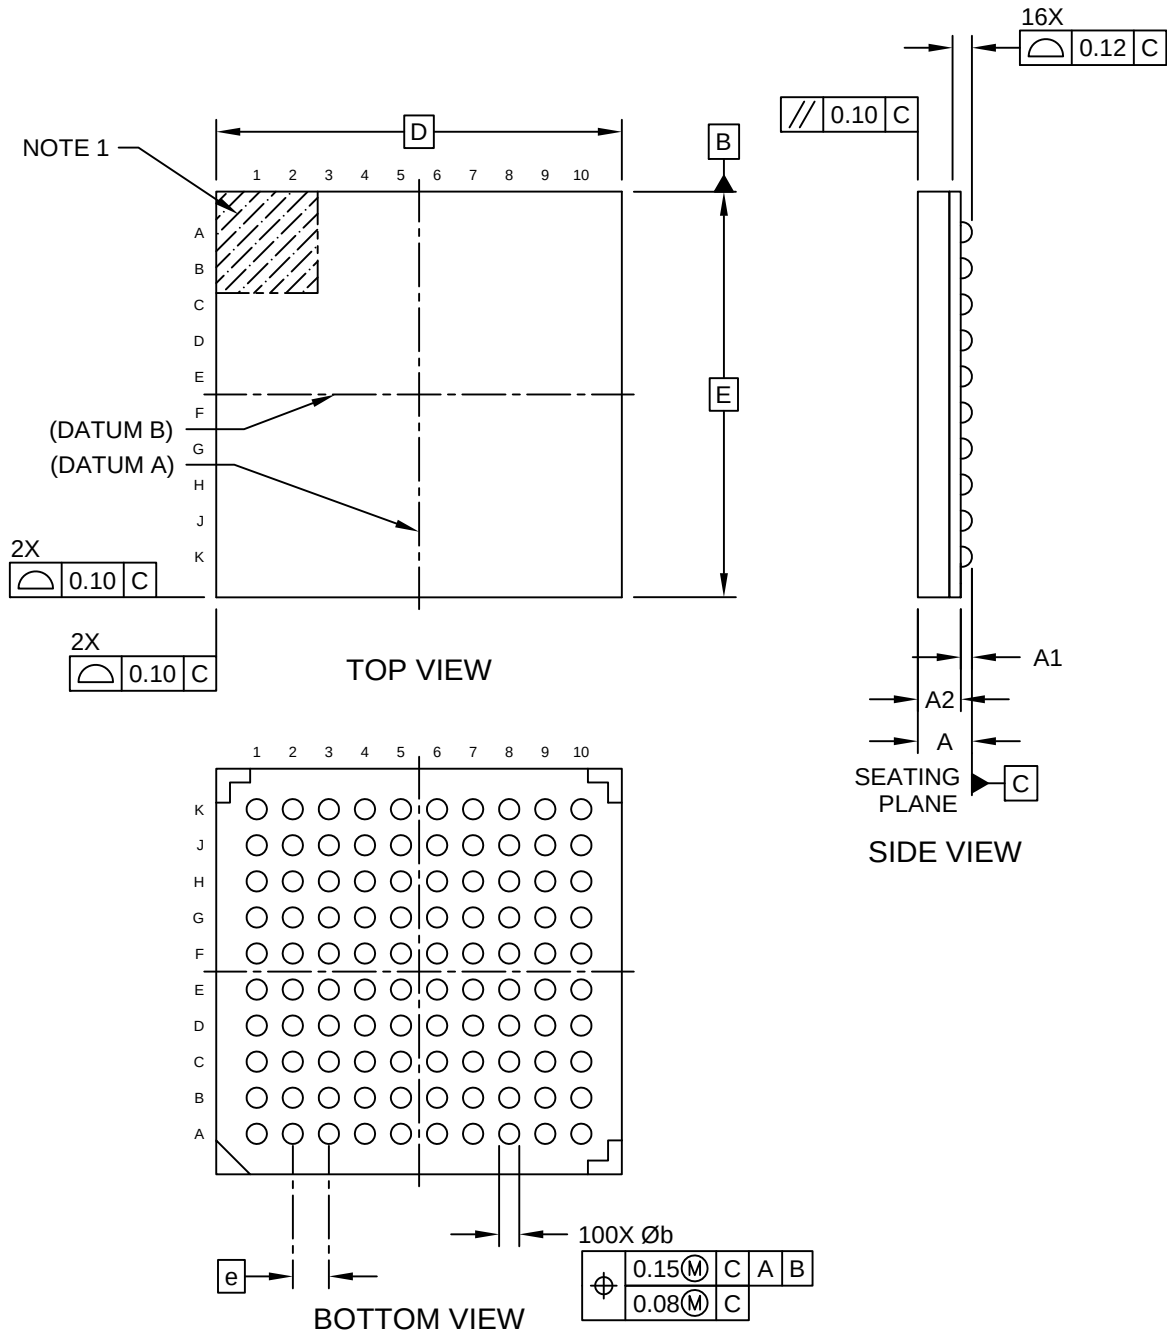

100-Ball Thin Fine Pitch Ball Grid Array (B2B) - 9x9x1.2 mm Body [TFBGA] Atmel Legacy Global Package Code CPR

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

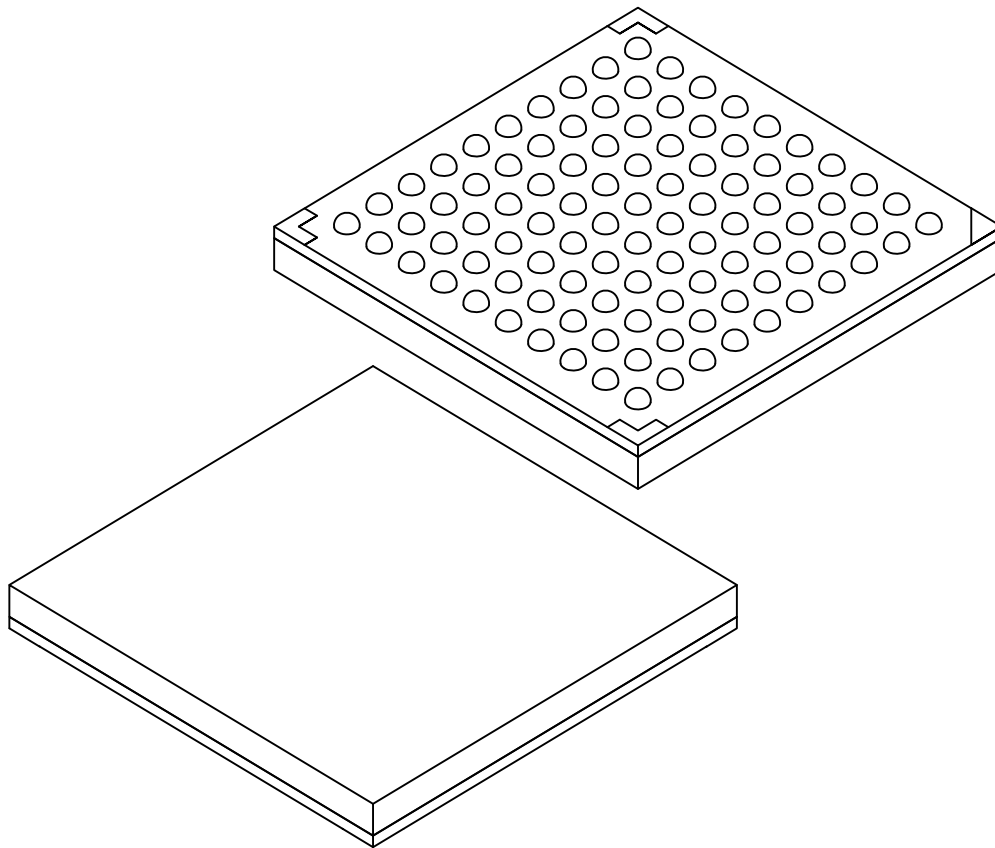


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	100		
Pitch	e	0.80 BSC		
Overall Height	A	-	-	1.20
Ball Height	A1	0.20	-	-
Molded Plastic Thickness	A2	0.65	-	-
Overall Length	D	9.00 BSC		
Overall Width	E	9.00 BSC		
Terminal Diameter	b	0.40	0.45	0.50

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

100-Ball Thin Fine Pitch Ball Grid Array (B2B) - 9x9x1.2 mm Body [TFBGA] Atmel Legacy Global Package Code CPR

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

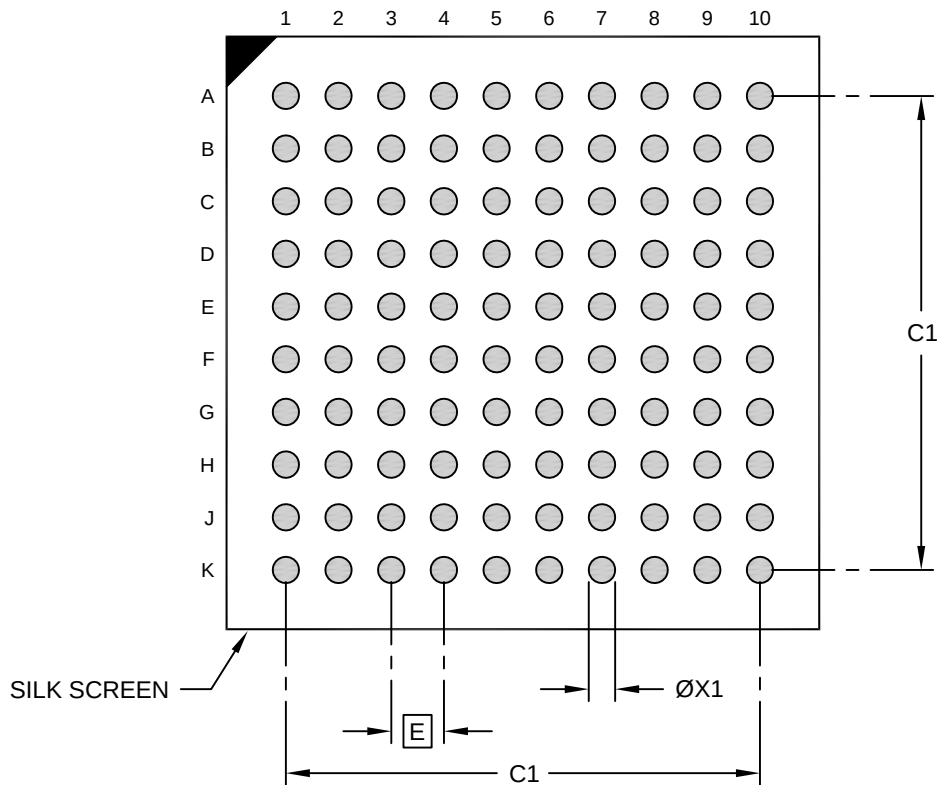

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1		7.20	
Contact Pad Spacing	C2		7.20	
Contact Pad Width (X20)	X1			0.40

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23135 Rev A