



121-Ball Thin Fine-Pitch Ball Grid Array Package (B8B) - 10x10x1.2mm Body [TFBGA] Atmel Legacy GPC: CSH

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

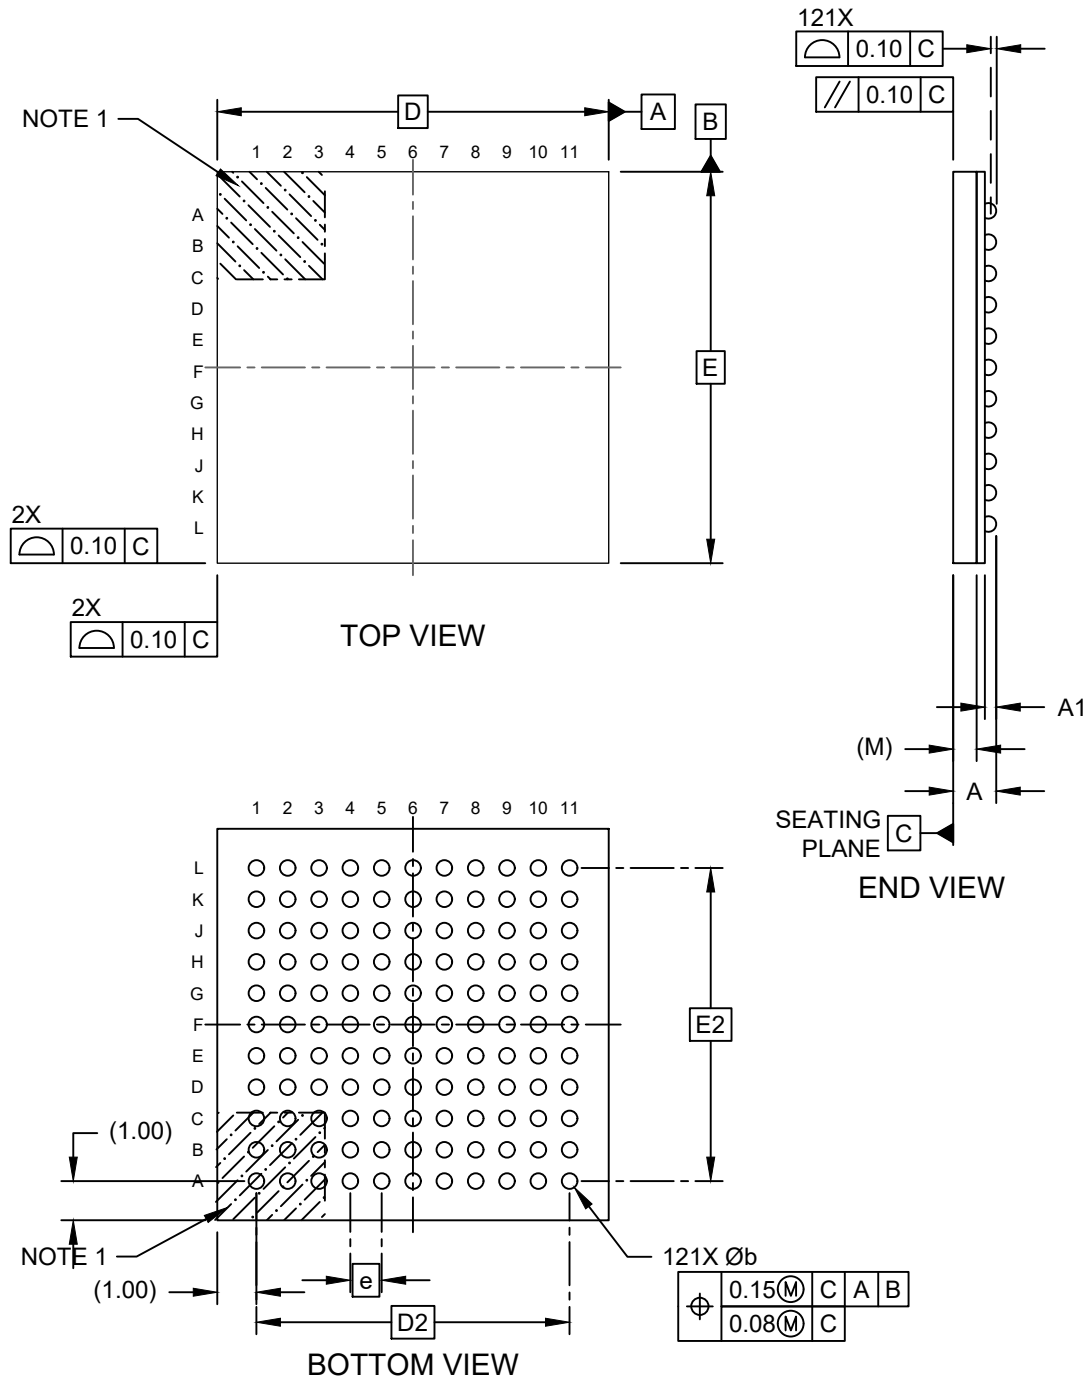

121-Ball Thin Fine-Pitch Ball Grid Array Package (B8B) - 10x10x1.2mm Body [TFBGA]
Atmel Legacy GPC: CSH

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

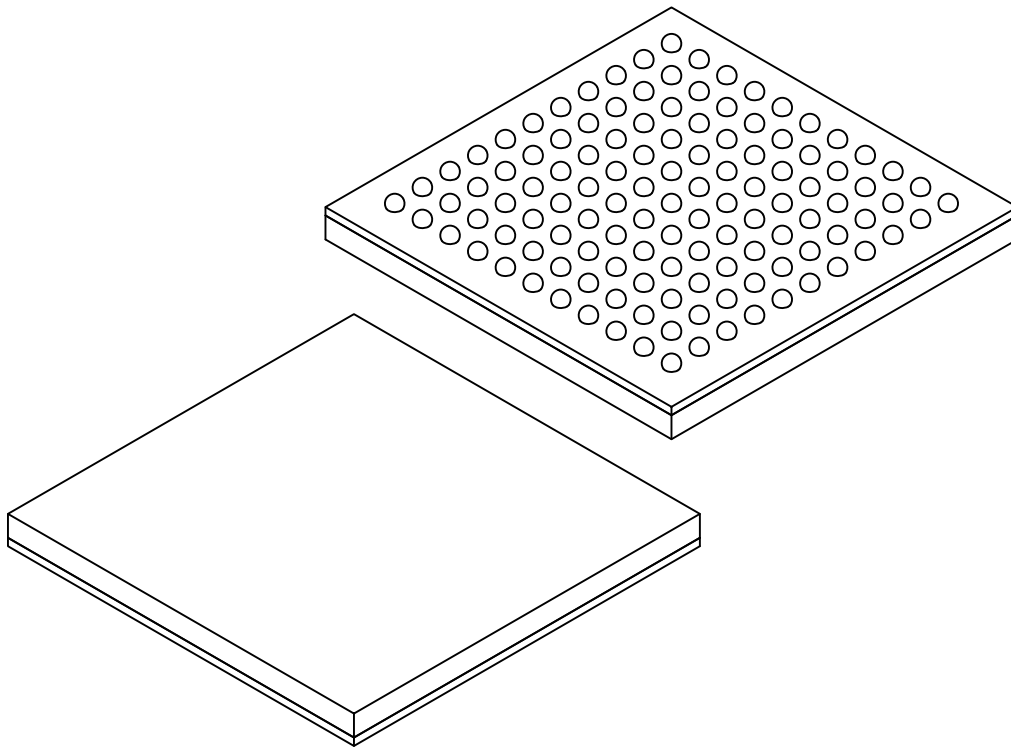


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		121		
Pitch	e		0.80 BSC		
Overall Height	A		–	–	1.20
Ball Height	A1		0.24	0.29	0.34
Mold Thickness	M		0.60 REF		
Overall Length	D		10.00 BSC		
Ball Array Length	D2		8.00 BSC		
Overall Width	E		10.00 BSC		
Ball Array Width	E2		8.00 BSC		
Ball Diameter	b		0.35	0.40	0.45

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

121-Ball Thin Fine-Pitch Ball Grid Array Package (B8B) - 10x10x1.2mm Body [TFBGA] Atmel Legacy GPC: CSH

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

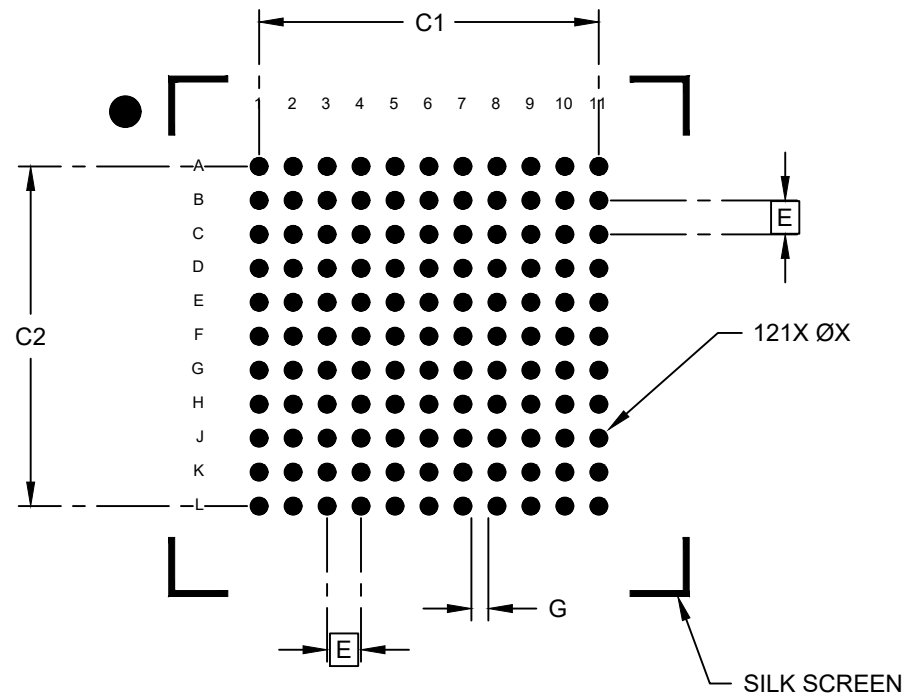

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Optional Pad Diameter (X128)	X			0.40
Contact Pad Spacing	C1		8.00	
Contact Pad Spacing	C2		8.00	
Column and Row Spacing	G	0.40		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23139 Rev A